



Series	Ultra Slim Led
Number of LED's	576
Light Color	Daylight
Measurement Distance	3 Feet

ССТ	5500 K
CRI(Ra)	95
Re(R1~R15)	91
CQS	93
Illuminance	5715 lux
Foot Candle	530.9 fc
λρ	456 nm
λD	552 nm
Purity(Pe)	4%

#### Spectrum



### CIE1931




CIE1976

x=0.3325, y=0.3486

 $u^i = 0.2041, v^i = 0.4813$ 

**CCT = 5499K** 

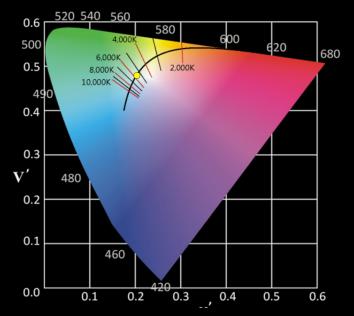


Photometric Data Provided By Asensetek Lighting Passport Copyright © 2015 CAME-TV




# IES TM-30-15

ССТ	5500 K
Rf	89
Rg	98

### Rf value plot




## **Color Vector Graphic**




Series	Ultra Slim Led
Number of LED's	576
Light Color	Daylight
Measurement Distance	3 Feet

## Rg vs Rf plot



## **Color Distortion Graphic**



Photometric Data Provided By Asensetek Lighting Passport Copyright © 2015 CAME-TV