


# JBW

www.JBW.com

RONDA 1032

## DISPLAY AND BUTTONS

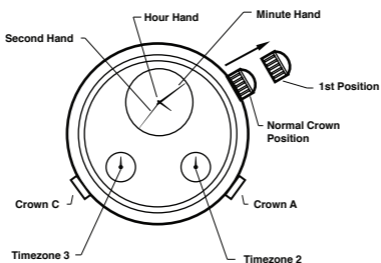

## SETTING THE TIME

1. Pull the crown out to the 1st position.
2. Turn the crown to set hour and minute to the desired time.
3. Push the crown back to the normal position.

**ATTENTION:** For watches with a screwdown crown, unscrew to set time and when finished screw back crown fully to avoid water entering the module. Crown covers should only be rotated 90 degrees clock-wise to access the crown.

## SET THE TIME ZONES

1. Pull the crown (A,B) out to the 1st position.
2. Turn the crown (A,B) to set hour and minute to the desired time.
3. Push the crown (A,B) back to the normal position.

## CAUTION

1. Do not touch internal components other than the batteries.
2. Keep your watch in a cool dry place.
3. Avoid abrasions as scratching may eventually affect the case and bracelet.

## BATTERY INSTRUCTIONS

1. Mixed usage of a different type of battery or use of new and used battery is not recommended.
2. Battery should be inserted with correct polarity.
3. Supply terminals should not be short-circuited.