





$Hylton^{^{\text{TM}}}$



Gray | 12x24






Leeds



Cream | 12x24

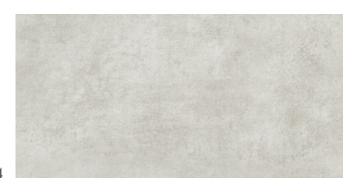



Gray | 12x24

12 MIL

EmcoreTM is a 5MM SPC product with a 12 mil wear layer. This collection of vinyl products is appropriate for any interior flooring application. EmcoreTM is a solid-core construction, waterproof material that is stain-, scratch- and dent-resistant. It is offered with 15 different graphic faces and a Uniclic[®] Locking System that provides the realistic look of tile with easier installation.

$\mathsf{Reign}^{\mathsf{TM}}$






Milk | 12x24



White | 12x24

Trim

T-Moulding



PRODUCT INFO	Thickness	5mm
	Wear Layer	12mil
	Solid Core	3.7mm
	Underlayment	1 mm IXPE Pad
	Click System	Uniclic® (Short & Long)
	UV Coating	Yes
	Water Resistant	Yes
	Warranty	35 Year Limited Residential Wear Warranty 5 Year Limited Commercial Wear Warranty

	Squareness ASTM F2421	PASS
ILTS	Dimensional Tolerances ISO 24337	PASS
ZESL	Dimensional Stability ASTM F2199	PASS
U U Z	Slip Resistance DIN 51130	R 10
	Residual Indentation ASTM F1914	PASS (0.001")
	Deep Abrasion ASTM D4060	25,000 CYCLES

Resistance to Bacteria ASTM G21	O - PASS
Castor Chair Resistance ANSI LF-01	PASS (25,000 CYCLES)
Heat Stability ASTM F1514	PASS (<2MM)
Resistance to Chemicals ASTM F925	PASS
Smoke Density ASTM E662	<450
Impact Sound Reductions ASTM E2179	Δ IIC 55 dB

Stain Resistance ASTM E423	NOT AFFECTED
Heavy Metals ASTM F963-16	FREE - PASS
Emissions Testing CDHP/CAL 1350	PASS (Og/L)
VOC Requirements ASTM D5116	PASS (Og/L)



UNICLIC® LOCKING SYSTEM



