

Mezzanine Double-Boom Gate

Pallet Safety Gate designed to promote safe delivery procedures onto mezzanines, elevated floors and loading bays

Mezzanine Gates are designed to promote a safe loading/unloading procedure onto elevated pallet drop areas like mezzanines and rack picking systems. The gate not only separates pedestrians from the forklift loading operation onto the mezzanine floors, they also secure the ledges of the loading bays to prevent unsafe fall accidents.

Our mezzanine gates are available in kits that include posts, booms and hardware to create changing-access areas with dual, counterbalanced gates ensuring one gate is always in place to secure the docking ledge.

Not what you're looking for? We have more industrial gates to choose from [here](#).



Product Features:

- Ensures safe loading/unloading of elevated areas.
- Reduces OH&S risks associated with this loading/unloading procedure.
- When one gate is open, the other is closed.
- Excludes pedestrians from unprotected edges.
- Integral kick rail as per AS 1657:2013.
- Modular design can be tailored to specific needs.
- Standard 1.5 metre opening suits most pallets.
- Aluminium rails include hi-vis reflective tape.
- Kit includes all posts, booms and hardware.
- Full installation service available.

[Part Numbers](#) [Technical Specifications](#) [Case Studies](#) [Just Ask](#)







Mezzanine Double-Boom Gate



Sort By:

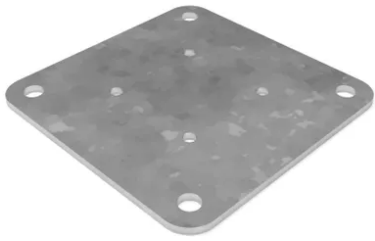Name A to Z

1 to 3 of 3 results

Code	Image	Product Name	Stock Level
KIT28		Fixing Kit for Mezzanine Gate - Galvanised Reinforcement Plates x 4	Login For Price 
MZ1500-A		Mezzanine Double Boom Gate Assembly 1500 x 1500mm	Login For Price 
MZ2000-A		Mezzanine Double Boom Gate Assembly 2000 x 1500mm	Login For Price 

1 to 3 of 3 results

Sort By:

Name A to Z

Description: Dual action safety gate.

Operation: Geared with spring assistance.

Construction: Steel frame with aluminium boom arms.

Gate Swing: 90 degrees vertical.

Opening Width: 1500mm / 2000mm.


Overall Width: 2000mm / 2500mm.

Overall Depth: 1900mm (both models).

Mounting Type: Surface mounted.

Rail Type: Powder coated aluminium 145 x 40mm.

Overhead Clearance: Dependent on working width.

 [How do I know whether I need a roll over Mezzanine gate or a Boom type?](#)

 We are currently compiling a list of additional services that might apply to this product.

Related Products:



[Mezzanine Roll-Over Gate](#)



[Galvanised U-Bars Double Rail Steel](#)

From Just Ask


[What is a loading dock gate?](#)

[What is a boom gate?](#)

[I need a self-closing industrial safety gate.](#)

[What is a self-closing safety swing gate?](#)

From the Blog



[How to Improve Workplace Safety \[infographic\]](#)

[Read More](#)

Case Studies



[Kent Relocation Group](#)