

Telescopic Boom Gate

← Click and drag image to view 360° →



Product Features:

- Ideal for restricted overhead space
- Use where there insufficient room for swing gate
- Boom extends from 2.5m to 3.8m
- Boom can be locked at any fixed length within its range
- Includes receiver post with lockable latch
- Hi-vis powder coated yellow finish
- M12 x 60mm sleeve anchors provided (posts)

Telescopic Boom Gate and Telescopic Boom Gate Dual Rail are clever designs suited to applications where overhead space is restricted or where there is insufficient room for a swing gate.

Available in both single and double rail models, the dual rail model is suitable to install as a loading dock safety gate, providing maximum fall protection from loading dock edges. The telescopic boom(s) can be locked off at a fixed length to what an available height allows or can be left to automatically retract as the gate is raised. The gates can be used to span openings from 2.5 metres to 3.8 metres.

The included receiver post allows the Telescopic Boom Gate to be securely clicked into its safety latch and manually released when required. The Telescopic Boom Gate Dual Rail model has an additional bracket mid-post that cradles the lower rail in its closed position.

A gas strut assists the rise and lowering of the boom(s) and allows for a smooth transition between open to close.

*Rails can be cut to size if required.

[Part Numbers](#) [Technical Specifications](#) [Case Studies](#) [Just Ask](#)

Telescopic Boom Gate



Sort By:

Name A to Z

1 to 2 of 2 results

| Code | Image | Product Name | Stock Level |
|------|-------|--------------|-------------|
|------|-------|--------------|-------------|


TBG3800



[Telescopic Boom Gate](#)

[Login For Price](#)

TBG3800-DR

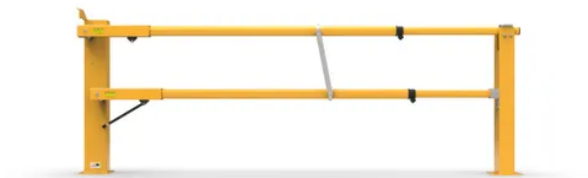

[Telescopic Boom Gate Dual Rail](#)

[Login For Price](#)



1 to 2 of 2 results

Sort By:

Name A to Z

Description: Telescopic light boom gate.

Operation: Manual lift with gas strut assistance.

Construction: Steel posts with aluminium rails.

Gate Swing: 90 degrees vertical.

Gate Stop: Built-in.

Receiver Post: Included (optional wall mount receiver).

Max. Opening: 3825mm.

Min Opening: 2325mm.

Mounting Type: Surface mounted posts.

Rail Type: Aluminium telescopic 50dia. inner 63dia. outer.

Rail Height: 940mm to the centre of the rail.

O/H Clearance: 3450mm.

Finish: Powder coated safety yellow.

! We are currently compiling a list of additional services that might apply to this product.

Related Products:



[Dock-Safe Manual](#)

[Boom Gate](#)

From Just Ask


[Mezzanine pallet safety roll over gate for mezzanine floors and loading docks.](#)

[Should pedestrian safety gates swing inwards or outwards?](#)

[What is a boom gate?](#)

[What industrial safety gate can I install with limited space?](#)

From the Blog



How to Improve Workplace Safety [infographic]

[Read More](#)

Case Studies



[Kent Relocation Group](#)