

Elite Cable

Product Part Number

- TAL2604N70XX

Product Description

- F/UTP, 26AWG stranded bare copper, CAT.6, LSZH
- Overall metal foil screen with drain wire

Product Features

- High performance of transmission.
- High quality of safety property.
- Sweep frequency up to 400 MHz.


Application

- Structure cabling for patch cable.
- Transmission of digital and analogue for data, video and audio applications.
- Overall metal shielded providing good protection from EMI noise.
- IEEE 802.3u 100BASE-T and legacy speeds.
- CDDI / ATM / Token Ring
- IEEE 802.3af (PoE) / IEEE 802.3at (PoE+)

Applicable Standard

- Electrical Transmission
 - ANSI/TIA-568.2-D (2018)
 - ISO/IEC 11801-1
 - IEC 61156-6 (Edition 3.1)
- Flame Test
 - IEC 60332-1-2
 - IEC 61034-1 / 61034-2
 - IEC 60754-2
- Material and Construction
 - IEC 61156-6 (Edition 3.1)
- EU Directive 2011/65/EU & 2015/863/EU
- EU Directive 2006/95/EC (LVD)

Sectional Drawing

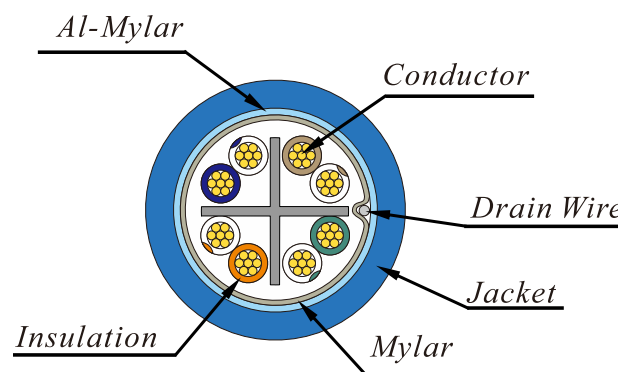

Establish Date	2016.07.04	Edition	1.1	Revised Date	2021.11.09
----------------	------------	---------	-----	--------------	------------

Infinity Cable Products
641 EAST WALNUT STREET
CARSON, CA 90746
TELEPHONE # 310-327-7678
EMAIL: support@infinity-cable.com

Elite Cable

Material and Construction

Conductor	Material	26AWG stranded bare copper	
Insulation	Material	Polyolefin (PO)	
	Color code & diameter	Blue & white/blue Stripe	0.82 ± 0.02 mm
		Orange & white/orange stripe	0.77 ± 0.02 mm
		Green & white/green stripe	0.81 ± 0.02 mm
Brown & white/brown stripe		0.77 ± 0.02 mm	
Twisted	Description	Left hand direction	
Filler	Material	Polyolefin (PO)	
Assembly	Description	Left hand direction	
Shield	Material	Mylar tape	
Drain wire	Material	26AWG stranded tinned copper	
Shield	Material	Al Mylar tape	
	Description	100 % coverage and mylar side facing out	
Jacket	Material	Low smoke zero halogen (LSZH)	
	Diameter	6.0 ± 0.2 mm	
	Thickness	0.50 ± 0.05 mm	
	Color	Per customer's request	
Marking	ELITE 1000X PATCH CABLE CAT 6 GIGASYSTEM F/UTP 4PR 26AWG 60°C LSZH TIA-568. 2-D mmyy RoHS COMPLIANT XXXXFT Note 1: mmyy is date code.		

Usage & Environmental Condition

Temperature range	Storage & shipping	-20°C to 60°C
	Installation	0°C to 60°C
	Operation	-20°C to 60°C
Minimum bending radius	≥ 8 times of overall diameter	
Maximum pulling tension	≤ 110 N	

Elite Cable

Physical & Electrical Characteristics (at 20°C)

Temperature rating	60°C
Spark test	2.5 KV DC
AC leakage current through overall jacket	≤ 10mA (1.5KV AC)
Cable cold bend	-20°C for 4 hr
Conductor DC resistance	≤ 14.0 Ω/100m
Resistance unbalance	≤ 5%
Dielectric strength	1.5 KV ac for 2 s
Insulation resistance	≥ 5000 MΩ · km
Mutual capacitance	≤ 5.6 nF/100m
Capacitance unbalance pair-to-ground	≤ 330 pF/100m

Transmission Performance (at 20°C)

Frequency (MHz)	IL	NEXT	PS.NEXT	ACR	PS.ACR	ACRF	PS.ACRF	RL	Propagation Delay	Delay Skew
	Max. dB/100m	Min. dB/100m	Min. dB/100m	Min. dB/100m	Min. dB/100m	Min. dB/100m	Min. dB/100m	Min. dB/100m	Max. ns/100m	Max. ns/100m
1	3.13	75.30	72.30	72.17	69.17	68.00	65.00	20.00	570.00	45.00
4	5.75	66.27	63.27	60.52	57.52	55.96	52.96	23.01	552.00	
8	8.06	61.75	58.75	53.69	50.69	49.94	46.94	24.52	546.73	
10	9.01	60.30	57.30	51.29	48.29	48.00	45.00	25.00	545.38	
16	11.43	57.24	54.24	45.81	42.81	43.92	40.92	25.00	543.00	
20	12.81	55.78	52.78	42.97	39.97	41.98	38.98	25.00	542.05	
25	14.38	54.33	51.33	39.96	36.96	40.04	37.04	24.17	541.20	
31.25	16.14	52.88	49.88	36.74	33.74	38.10	35.10	23.33	540.44	
62.5	23.25	48.36	45.36	25.11	22.11	32.08	29.08	20.74	538.55	
100	29.94	45.30	42.30	15.36	12.36	28.00	25.00	18.99	537.60	
150	37.37	42.66	39.66	5.29	2.29	24.48	21.48	17.47	536.94	
200	43.83	40.78	37.78	N.A.	N.A.	21.98	18.98	16.40	536.55	
250	49.69	39.33	36.33	N.A.	N.A.	20.04	17.04	15.60	536.28	
300	55.11	38.14	35.14	N.A.	N.A.	18.46	15.46	15.60	536.08	
350	60.19	37.14	34.14	N.A.	N.A.	17.12	14.12	15.60	535.92	
400	65.02	36.27	33.27	N.A.	N.A.	15.96	12.96	15.60	535.80	

Values above 250MHz are for information only.

Elite Cable

Shipping Information


Item	Dimension	Nominal net weight
Cable	305 m	10.55 kg (23.26 lb)
Plywood reel	D320 x d150 x H254 x h230 mm	1.6 kg
Pallet	1130 x1150 x120 mm	14.1 kg

Container type	Capacity of pallet	Pallet of reel	Capacity of reel
20 feet	20	48/48	960
40 feet	32	48/48	1536
40 feet HQ	32	48/48	1536

Shipping could use standard delivery form or per customer's request.
 Package information above is calculated by maximum container capacity, and for reference only.
 All shipments must follow your local transportation regulation for gross weight limit.


Schematic Drawing of Reel & Package

Fumigated plywood reel.




Schematic Drawing of Package

Each package of pallet delivered with plastic wrap and packing strap.

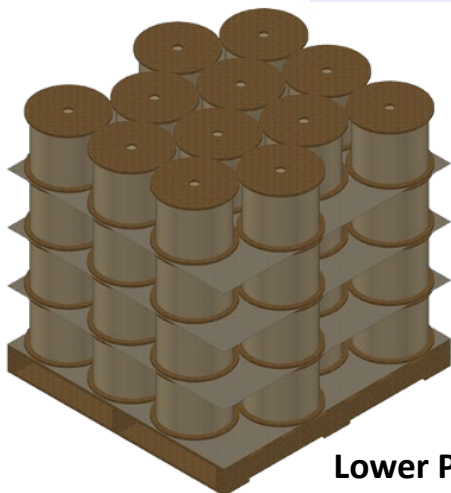

Lower Pallet

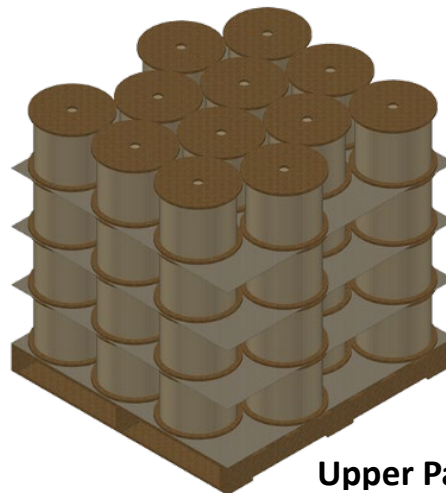

Upper Pallet

Revised Information

Edition	Revised Description	Revised Date
1.1	Revised the size of the pallet, the number of stacks and the weight of cable.	2021.11.09

AK001 / 210×297 / 1.1

MAKER : Benson Li

CONFIRM : W.J. Wang

APPROVAL : Alex Lin