

# Elite Cable

## Product Part Number

- TPP2804S03XX

## Product Description

- U/UTP, 28AWG stranded bare copper, CAT.6A, CMP

## Product Features

- High performance of transmission.
- High quality of safety property.
- Sweep frequency up to 500 MHz.


## Application

- Structure cabling for patch cable.
- Transmission of digital and analogue for data, video and audio applications.
- IEEE 802.3ab 1000BASE-T, 1000BASE-TX and legacy speeds.
- CDDI / ATM / Token Ring

## Applicable Standard

- Electrical Transmission
  - ANSI/TIA-568.2-D (2018)
- Flame Test
  - NFPA 262 (CMP)
- Material and Construction
  - UL 444
  - CSA 22.2 NO.214
- EU Directive 2011/65/EU & 2015/863/EU
- EU Directive 2006/95/EC (LVD)

## Sectional Drawing

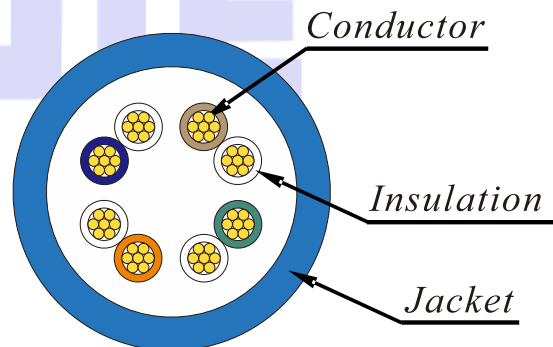

Establish Date	2022.01.28	Edition	1.5	Revised Date	2022.07.27
----------------	------------	---------	-----	--------------	------------

**Infinity Cable Products**  
641 EAST WALNUT STREET  
CARSON, CA 90746  
TELEPHONE # 310-327-7678  
EMAIL:support@infinity-cable.com

# Elite Cable

## Material and Construction

Conductor	Material	28AWG stranded bare copper	
Insulation	Material	Fluorinated Ethylene Propylene (FEP)	
	Color code & diameter	Blue & white	0.60 ± 0.02 mm
		Orange & white	0.58 ± 0.02 mm
		Green & white	0.60 ± 0.02 mm
Brown & white		0.58 ± 0.02 mm	
Twisted	Description	Left hand direction	
Assembly	Description	Left hand direction	
Jacket	Material	Low smoke flame retardant polyvinyl chloride (LSFRPVC)	
	Diameter	3.5 ± 0.2 mm	
	Thickness	0.38 ± 0.05 mm	
	Color	Per customer's request	
Marking	ELITE PATCH CABLE CAT 6A---E224805-w UTP 4PR 28AWG 75°C C(UL)US CMP---TIA-568. 2-D mmyy RoHS COMPLIANT XXXXFT  Note 1: mmyy is date code.		

## Usage & Environmental Condition

Temperature range	Storage & shipping	-20°C to 75°C
	Installation	0°C to 60°C
	Operation	-20°C to 75°C
Minimum bending radius	≥ 4 times of overall diameter	
Maximum pulling tension	≤ 110 N	

# Elite Cable

## Physical & Electrical Characteristics (at 20°C)

Voltage and Temperature rating	300V / 75°C
Spark test	2.5 KV DC
AC leakage current through overall jacket	≤ 10mA (1.5KV AC)
Cable cold bend	-20°C for 4 hr
Conductor DC resistance	≤ 23.6 Ω/100m
Resistance unbalance	≤ 4%
Dielectric strength	1.5 KV ac for 2 s
Insulation resistance	≥ 5000 MΩ · km
Mutual capacitance	≤ 5.6 nF/100m
Capacitance unbalance pair-to-ground	≤ 330 pF/100m

## Transmission Performance (at 20°C)

Frequency (MHz)	IL	NEXT	PS. NEXT	ACRF	PS. ACRF	RL	Propagation Delay	Delay Skew
	Max. dB/100m	Min. dB/100m	Min. dB/100m	Min. dB/100m	Min. dB/100m	Min. dB/100m	Max. ns/100m	Max. ns/100m
1	4.05	74.30	72.30	67.80	64.80	20.00	570.00	45.00
4	7.41	65.27	63.27	55.76	52.76	23.01	552.00	
8	10.35	60.75	58.75	49.74	46.74	24.52	546.73	
10	11.55	59.30	57.30	47.80	44.80	25.00	545.38	
16	14.60	56.24	54.24	43.72	40.72	25.00	543.00	
20	16.34	54.78	52.78	41.78	38.78	25.00	542.05	
25	18.29	53.33	51.33	39.84	36.84	24.17	541.20	
31.25	20.48	51.88	49.88	37.90	34.90	23.33	540.44	
62.5	29.23	47.36	45.36	31.88	28.88	20.74	538.55	
100	37.31	44.30	42.30	27.80	24.80	18.99	537.60	
150	46.17	41.66	39.66	24.28	21.28	17.47	536.94	
200	53.77	39.78	37.78	21.78	18.78	16.40	536.55	
250	60.58	38.33	36.33	19.84	16.84	15.57	536.28	
300	66.82	37.14	35.14	18.26	15.26	14.89	536.08	
350	72.63	36.14	34.14	16.92	13.92	14.31	535.92	
400	78.10	35.27	33.27	15.76	12.76	13.81	535.80	
450	83.29	34.50	32.50	14.74	11.74	13.37	535.70	
500	88.25	33.82	31.82	13.82	10.82	12.98	535.61	

# Elite Cable


## Shipping Information

Item	Dimension	Nominal net weight
Cable	305 m	4.93 kg (10.87 lb)
Plastic Reel Carton (A1-242)	D300 x d130 x H130 x h100 mm L312 x W312 x H150 mm	2000 g
Pallet	1100 x1150 x110 mm	14.1 kg

Container type	Capacity of pallet	Pallet of carton	Capacity of carton
20 feet	20	54/54	1080
40 feet	40	54/54	2160
40 feet(HQ)	40	54/54	2160


Shipping could use standard delivery form or per customer's request.  
 Package information above is calculated by maximum container capacity, and for reference only.  
 All shipments must follow your local transportation regulation for gross weight limit.

## Schematic Drawing of Carton

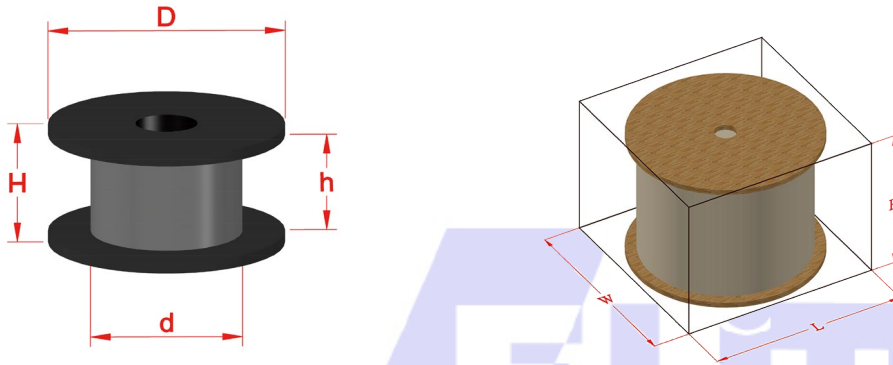


## Schematic Drawing of Package

Each package of pallet delivered with plastic wrap, packing strap and paper corner protector.

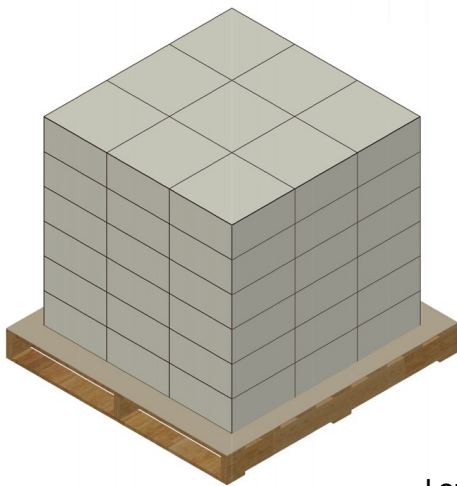

Lower Pallet

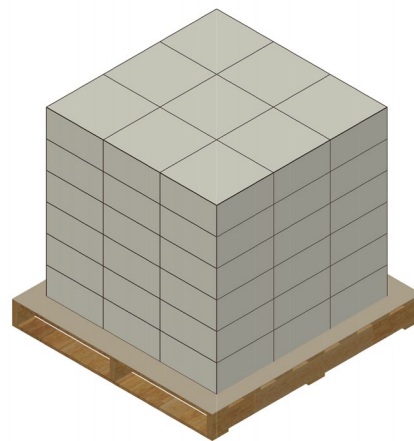

Upper Pallet

AK001 / 210×297 / 1.1

## Revised Information

Edition	Revised Description	Revised Date
1.4	Revised the size of the pallet	2022.04.29
1.5	Add Voltage rating	2022.07.27