



BROADCAST-CLASS CAMERA LITHIUM ION BATTERY



Meet the safety requirements about carry-on stuff on air plane

Airplane carry-on standard: It cannot be checked as luggage but can be carried with passengers themselves with two lithium batteries below 10000mAh.



Multi Functions

B-TAP socket can supply electricity for various devices.



Safety Protection

Battery shell: adopting imported PC as the raw material of the shell makes the shell beautiful and drop resistance.
Circuit board: multi protection of temperature, voltage and current.
Socket: applying PPS aeronautical material, which can resist high temperature up to 300 degree



Reliable Quality

Famous brand, High-performance imported lithium battery cell.



Precise display of electricity quantity

- LCD-readout Battery LCD display can show the remained electricity quantity accurately.
- The display of LED four-stage electricity quantity for normal battery



Authorized certification

Batteries have passed many tests

CE UN38.3
ISO9001:2000


BROADCAST-CLASS CAMERA LITHIUM ION LCD-READOUT BATTERY



Product Description


- 1 High-performance imported lithium battery cell meets the requirements of carry-on stuff on air plane
- 2 Lithium ion battery without memory effect is equipped with LCD screen to display the overall performance of battery.
- 3 Built-in intelligent control circuit can implement the protection for temperature, voltage and current.
- 4 Standard B-shaped socket can supply power for camera and press lighting.

LED display instructions

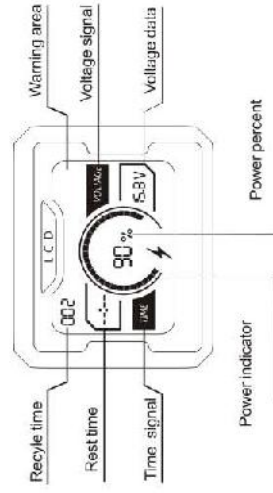

Power indicator: show dynamic state to show rest power in discharge state, show dynamic increasing data power in charge state, data scope of power indicator is 0-20.
 Rest time: show rest time in discharge, show charge time in charge state.
 Voltage data: present voltage of the battery.

Gold-Lock BATTERY

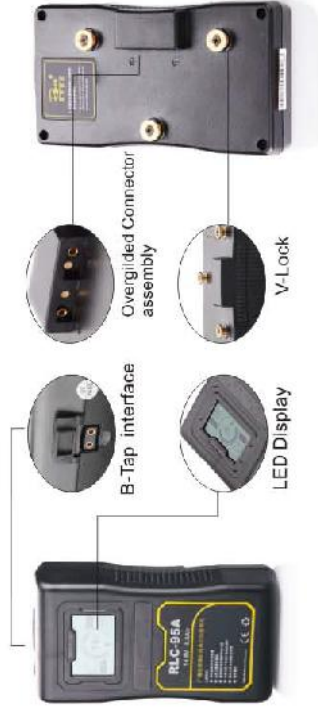

V-Lock BATTERY



V-Lock BATTERY



RLC-95S 95Wh



RLC-130S 130Wh



RLC-160S 160Wh



RLC-190S 190Wh



RLC-230S 230Wh

Technical parameters

Model	Voltage	Capacity	Max.Output power	Weight	Size
RLC-95S	14.8V	95Wh	95W	0.76Kg	165*90*53mm
RLC-130S	14.8V	130Wh	130W	0.92Kg	165*90*53mm
RLC-160S	14.8V	160Wh	160W	1.00Kg	165*90*53mm
RLC-190S	14.8V	190Wh	190W	1.27Kg	165*90*70mm
RLC-230S	14.8V	230Wh	230W	1.40Kg	165*90*70mm

Gold-Lock BETTER



RLC-95A 95Wh



RLC-130A 130Wh



RLC-160A 160Wh



RLC-190A 190Wh



RLC-230A 230Wh

Technical parameters

Model	Voltage	Capacity	Max.Output power	Weight	Size
RLC-95A	14.8V	95Wh	95W	0.76Kg	165*90*57mm
RLC-130A	14.8V	130Wh	130W	0.92Kg	165*90*57mm
RLC-160A	14.8V	160Wh	160W	1.00Kg	165*90*57mm
RLC-190A	14.8V	190Wh	190W	1.27Kg	165*90*74mm
RLC-230A	14.8V	230Wh	230W	1.40Kg	165*90*74mm

BROADCAST-CLASS CAMERA LITHIUM ION BATTERY



The Product Introduction

- High capacity ;long always-on time; lithium ion battery
- No memory effect environmentally friendly
- Four-stage electricity quantity display; intelligent control circuit
- Multi protection for temperature, voltage and current
- Power interface of lights
- Supply power for camera and press lighting
- V-shaped socket is compatible with SONY L40L60L90 lithium ion battery



B-Tap interface



Overgilded Connector assembly



V-Lock



Power indicator light

V-Lock BETTERY



■ Technical parameters

Model	Voltage	Capacity	Max. Output power	Weight	Size
RL-65S	14.8V	65Wh	65W	0.58Kg	145*88*48mm
RL-95S Big	14.8V	95Wh	95W	0.74Kg	145*88*48mm
RL-95S Small	14.8V	95Wh	95W	0.76Kg	165*88*48mm
RL-130S	14.8V	130Wh	130W	0.90Kg	165*88*48mm
RL-160S	14.8V	160Wh	160W	0.96Kg	165*88*48mm
RL-190S	14.8V	190Wh	190W	1.26Kg	165*88*63mm
RL-230S	14.8V	230Wh	230W	1.42Kg	165*88*63mm

BROADCAST-CLASS CAMERA LITHIUM ION BATTERY



The Product Introduction

- High capacity ;long always-on time; lithium ion battery
- No memory effect environmentally friendly
- Four-stage electricity quantity display ; intelligent control circuit
- Multi protection for temperature, voltage and current
- Power interface of lights
- Supply power for camera and press lighting
- Gold-lock is compatible with ANTON battery



Gold-Lock



B-Tap interface



Overglued Connector assembly



Power indicator light

Gold-Lock BATTERY



RL-65A 65Wh



RL-95A Big 95Wh



RL-95A Small 95Wh



RL-130A 130Wh



RL-160A 160Wh



RL-190A 190Wh



RL-230A 230Wh

■ Technical parameters

Model	Voltage	Capacity	Max.Output power	Weight	Size
RL-65A	14.8V	65Wh	65W	0.58Kg	145*88*50mm
RL-95A Big	14.8V	95Wh	95W	0.74Kg	145*88*50mm
RL-95A Small	14.8V	95Wh	95W	0.76Kg	165*88*50mm
RL-130A	14.8V	130Wh	130W	0.90Kg	165*88*50mm
RL-160A	14.8V	160Wh	160W	0.96Kg	165*88*50mm
RL-190A	14.8V	190Wh	190W	1.26Kg	165*88*65mm
RL-230A	14.8V	230Wh	230W	1.42Kg	165*88*65mm