




B&G Tailbar Installation Manuaowowowl*


* That's 'Manual' with tremolo.

Thank you for purchasing the B&G Tailbar!

Contents of the package

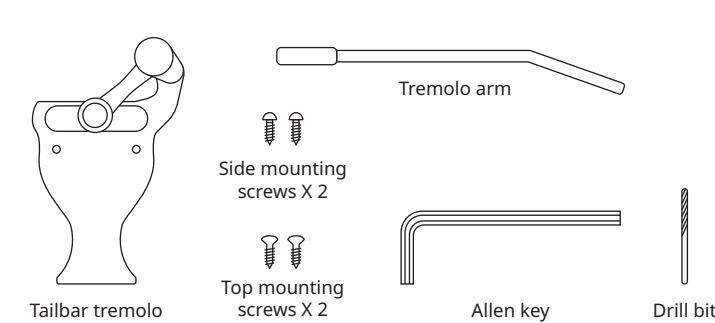

Tools Required

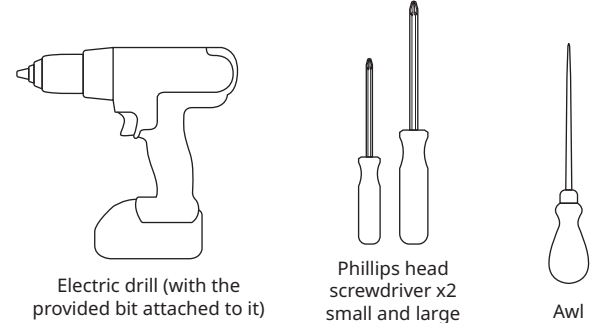

Below is a simple step-by-step guide to installing the Tailbar on your guitar. **Please note that if you feel unsure about the installation process and are afraid of damaging your guitar, we highly recommend taking it to a local guitar technician.**

1. Remove the screws from the old tailpiece and take it out. **Figure 1**
2. Install the new Tailbar tailpiece by inserting the side mounting screws from the old tailpiece and tightening them almost all the way. Only tighten the center screw (strap button). **Figure 2**
3. Install the two outer strings (high E and Low E) and tighten them slightly to center the Tailbar to the bridge. **Figure 3**
4. Adjust the direction of the Tailbar by tightening the side mounting screws in the tailpiece. Loosen a little to achieve ideal alignment.
5. Use a provided drill bit to drill top mounting holes for the Tailbar. Drill at a 90-degree angle to the body, passing through the holes in the tailpiece.
Tip 1: use an awl to mark the center of the hole.
*Tip 2: Make sure to drill only the necessary depth according to the screw length. **Figure 4***
6. Tighten the provided top screws to the two holes located at the face of the tailpiece to fasten it to the top and prevent vibrations.
Tip: Ensure that both felt pads make contact with the guitar surface.
7. Insert the tremolo arm into the designated hole, adjust the desired length, and tighten the allen bolts using the provided allen key. **Figure 5**
8. Rock and roll! **Figure 6**

