


SWIVEL ANCHOR CONNECTOR

- Swivel anchor connector made of high quality stainless steel AISI 316.
- Anchor slides perfectly through the ferrule without any problems or damage to the sheaving. Anchor straightens up automatically and is correctly positioned on board.
- It has a hold on the seabed without the chain twisting.
- The bigger version # 644.16 is designed for anchors up to 150 kg.

- Giunto girevole per ancora realizzato in acciaio inox AISI 316 di altissima qualità.
- Scorrimento perfetto dell'ancora nel puntale senza intoppi o danni alle pulegge. Raddrizzamento automatico e corretto posizionamento dell'ancora a bordo.
- Tenuta dell'ancora sul fondo senza torsioni sulla catena.
- Disponibile in quattro misure per catene da 6 a 20 mm.
- La speciale versione 644.16 è in grado di sostenere ancora fino a 150 kg.



Up to 3/4" chains (20 mm).
Up to 150 kg anchors.
Fino a catene da 20 mm.
Fino ad ancore 150 kg.




#	mm	Material	USE Kg/f	Color	A g	B mm	C mm	D mm	E mm	F mm
64408000KK	6÷8	stainless steel	2500	850	240	93	28	16	10	19
64410000KK	8÷12	stainless steel	5000	2000	550	117	37	22	13	23
64412000KK	12÷14	stainless steel	9500	3000	2350	155	66	35	18	30
64416000KK	16÷20	stainless steel	20000	5000	5000	190	86	43	22	42

FIXED ANCHOR CONNECTOR

- Fixed anchor connector made of high quality stainless steel AISI 316 or carbon steel.
- Anchor slides perfectly through the ferrule without any problems or damage to the sheaving.
- Anchor straightens up automatically and is correctly positioned on board.
- Available in 3 sizes.

- Giunto per ancora realizzato in acciaio inox AISI 316 o acciaio al carbonio di altissima qualità.
- Scorrimento perfetto dell'ancora nel puntale senza intoppi o danni alle pulegge.
- Raddrizzamento automatico e corretto posizionamento dell'ancora a bordo.
- Disponibile in 3 misure.

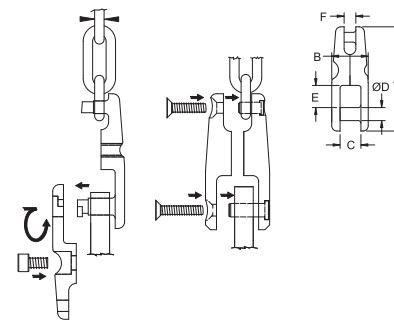

#	mm	Material	USE Kg/f	Color	A g	B mm	C mm	D mm	E mm	F mm
64308000KK	6-7-8	stainless steel	2500	850	180	80	28	16	10	19
64310000KK	8-10-12	stainless steel	5000	2000	410	100	37	22	13	23.5
64312000KK	12-13-14	stainless steel	9500	3000	1000	125	55	33	18	28
444080200KK	6-7-8	carbon steel	2500	850	180	80	28	16	10	19
444120200KK	12-13-14	carbon steel	9500	3000	1440	144	54	31	16	26

