



TEST OUR METAL®

Job: _____

Item No. _____

Mobile Heated Cabinet

Heavy duty heated holding/transport cabinet for use with 12" X 20" pans.

- All stainless steel construction
- Fully insulated
- Cabinets fully framed all vertical and horizontal edges
- Caster mounting plates fully welded to cabinet framing
- Caster mounting plates 6" x 6" x 5/16" steel plate drilled and tapped
- All hardware mounted through framing
- Door framed, insulated and gasketed
- Door louvered with adjustable damper
- Top mounted control panel
- 60 to 230 degree temperature range
- Armor Heat™ system
- 5" caster standard
- Low power requirements
- Pan guides permanently mounted
- Accommodates 12" x 20" pans in 2", 4" or 6" depth
- Accommodates 1/2" and 1/3" size pans
- (NOTE: except C12D2)

Models

- C5D2
- C9D2
- C12D2
- C12UPD2
- C16D2




C9D2 shown



Made in USA

451 E. County Line Rd. • P.O. Box 1089 • Mooresville, IN 46158
Toll Free 800-733-8073 • Local 317-831-7030 • Fax 317-831-7036
www.secoselect.com

| MODEL # | CAPACITY 12" x 20" - 2 1/2" pans | WIDTH DIM A | DEPTH DIM B | HEIGHT DIM C | VOLTAGE | WATTAGE | AMPERAGE | SHIP WEIGHT |
|---------|-------------------------------------|----------------|----------------|-----------------|---------|---------|----------|----------------|
| C5D2 | 10 | 36 3/4" | 29" | 35 5/16" | 120 | 1000 | 8.33 | 346 |
| C9D2 | 18 | 36 3/4" | 29" | 45 1/16" | 120 | 1000 | 8.33 | 415 |
| C12D2 | 24 | 52 3/4" | 34" | 37 13/16" | 120 | 1500 | 12.5 | 441 |
| C12UPD2 | 24 | 36 3/4" | 29" | 54 3/16" | 120 | 1980 | 16.5 | 490 |
| C16D2 | 32 | 36 3/4" | 29" | 65 13/16" | 120 | 1980 | 16.5 | 530 |

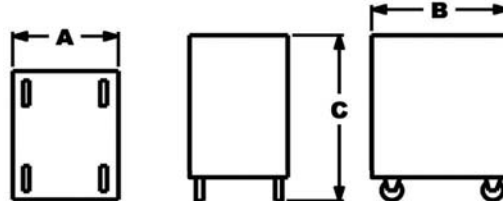

GENERAL: Cabinet constructed throughout with stainless steel. All double wall construction insulated with high density fiberglass insulation. All exterior surfaces shall be ground and polished to a #4 finish.

INTERNAL FRAME: All vertical and horizontal edges framed with a combination of 1 1/2" x 1 1/2" x 1/8" and 1" x 1" x 1/8" angle steel, arc welded, cross braced and reinforced at all corners.

BASE FRAME: 1/8" formed steel base. Base shall have, four 6" x 6" x 5/16", steel plates drilled and tapped to accommodate 5", 6" or 8" casters. The plates are fully welded to frame on all four sides.

INNER CABINETS: Inner cabinets shall be all 24 gauge 300 series. Stainless steel inner cabinet shall have permanently mounted pan rails. Rails shall accommodate 12" x 20" x 2 1/2" pans or multiples of 4" and 6" pans. Cabinet will also accommodate 1/2" and 1/3" pans. Inner cabinet fully insulated with high density fiberglass; 2" on sides and back, 4" on top and bottom. Inner cabinet shall be heated by the Armor Heat™ system. There shall be two inner cabinets.

DOORS: Door shall be all 20 gauge stainless steel. Door shall have full interior frame constructed of 3/4" x 3/4" 14 gauge galvanized steel angle. Doors shall be fully insulated and gasketed.

Doors shall have an exterior louver with an interior damper for moisture control. All door hardware shall be secured through framing in cabinet and door. Door shall have a heavy-duty positive and magnetic door latch and heavy-duty refrigeration type door hinges.

ELECTRICAL CHARACTERISTICS: Cabinets shall have 2 top mounted control panels consisting of an on/off switch, with power indicator light, and electronic control with digital temperature display. Each cabinet shall be heated by a 120 volt 60 cycle 1 single phase heating system. Cabinets shall come complete with a permanently mounted 8' cord with a Nema #5-15P plug. Top of cabinet is removable for easy access to controls. Models C12UPD2 & C16D2 use Nema #5-20P.

CASTERS: Cabinet shall have 4 heavy duty 5" casters, 2-rigid and 2-swivel casters mounted to 6" x 6" x 5/16" steel plate drilled and tapped.

Accessories, Options, Variations

- Pass-thru doors
- Left hand hinged doors
- Alternate rail spacing
- Vertically mounted push handles
- Heavy duty casters, 5" or 8"
- Exterior edges protected with 1" x 1" x 1/8" stainless steel angle
- Flush mounted heavy duty paddle latch
- Heavy duty transport latch that will accept a padlock, 12 gauge stainless steel
- Stainless steel perforated shelves
- Dutch doors
- Sterno adapter
- Lexan doors
- Stainless steel adjustable legs
- Heavy duty perimeter bumper systems
- Tamper proof fasteners
- Control panel cover, lockable
- Stainless steel welded door hinges



451 E. County Line Rd. • P.O. Box 1089 • Mooresville, IN 46158
800-733-8073 • Local 317-831-7030 • Fax 317-831-7036
www.secoselect.com