



TEST OUR METAL®

Job: _____

Item No. _____

Mobile Heated Cabinet

Designed to accommodate 12" x 20" pans

- All stainless steel construction
- Fully insulated
- Cabinet is fully framed all vertical and horizontal edges
- Caster mounting plates fully welded to cabinet framing
- Caster mounting plates 6" x 6" x 5/16" steel plate drilled and tapped
- All hardware mounted through framing
- Door framed, insulated and gasketed
- Door louvered with adjustable damper
- Top mounted control panel
- 60 to 230 degree temperature range
- Armor Heat™ system
- 5" casters standard
- Low power requirements
- Pan guides permanently mounted
- Accommodates 12" x 20" pans in 2", 4" or 6" depth
- Accommodates 1/2" and 1/3" size pans
- C5, C9, come complete with four sidelift handles
- C5, C9, available with removable dolly

Models

- C5
- C9
- C12UP
- C16




C9 shown



Made in USA

451 E. County Line Rd. • P.O. Box 1089 • Mooresville, IN 46158
 Toll Free 800-733-8073 • Local 317-831-7030 • Fax 317-831-7036
www.secoselect.com

MODEL #	CAPACITY 12"x 20" - 2 1/2" pans	WIDTH DIM A	DEPTH DIM B	HEIGHT DIM C	VOLTAGE	WATTAGE	AMPERAGE	SHIP WEIGHT
C5	5	19 1/2"	29"	35 5/16"	120	500	4.16	SS-160
C9	9	19 1/2"	29"	45 1/16"	120	500	4.16	SS-280
C12UP	12	19 1/2"	29"	54 3/16"	120	900	8.25	300
C16	16	19 1/2"	29"	65 13/16"	120	900	8.25	355

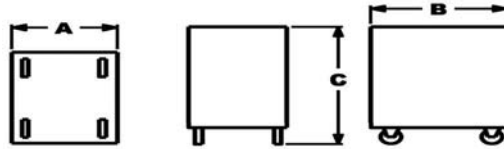

GENERAL: Cabinet constructed throughout with stainless steel. All double wall construction, insulated with high density fiberglass insulation. All exterior surfaces shall be ground and polished to a #4 finish.

INTERNAL FRAME: All vertical and horizontal edges framed with a combination of 1 1/2" x 1 1/2" x 1/8" angle steel, arc welded, cross braced and reinforced at all corners.

BASE FRAME: 1/8" formed steel base. Base shall have, four 6" x 6" x 5/16", steel plates drilled and tapped to accommodate 5", 6" or 8" casters. The plates are fully welded to frame on all four sides.

INNER CABINETS: Inner cabinets shall be all 24 gauge 300 series. Stainless steel inner cabinet shall have permanently mounted pan rails. Rails shall accommodate 12" x 20" x 2 1/2" pans or multiples of 4" and 6" pans. Cabinet will also accommodate 1/2" and 1/3" size pans. Inner cabinet fully insulated with high density fiberglass; 2" on sides and back, 4" on top and bottom. Inner cabinet shall be heated by the Armor Heat™ system.

DOORS: Door shall be all 20 gauge stainless steel. Door shall have full interior frame constructed of 3/4" x 3/4" 14 gauge galvanized angle steel. Door shall be fully insulated and gasketed. Doors shall have an exterior louver with an interior damper for moisture control. All door hardware shall be secured through framing in cabinet and door. Door shall have a heavy-duty positive and magnetic door latch and heavy duty refrigeration type door hinges.

ELECTRICAL CHARACTERISTICS: Cabinets shall have a top mounted control panel consisting of an on/off switch with power indicator light, and electronic control with digital temperature display. Cabinet shall be heated by a 120 volt, 60 cycle, 1 phase heating system. Cabinets shall come complete with a permanently mounted 8' cord with a Nema #5-15P plug. Top of cabinet is removable for easy access to controls.

CASTERS: Cabinet shall come complete with 4-5" casters, 2-rigid and 2-swivel casters mounted to 6" x 6" x 5/16" steel plate drilled and tapped.

Accessories, Options, Variations

- Pass-thru doors
- Left hand hinged doors
- Alternate rail spacing
- Vertically mounted push handles
- Choice of heavy-duty casters, 5" x 2", 6" & 8"
- Exterior edges protected with 1" x 1" x 1/8" stainless steel angle
- Flush mounted heavy duty paddle latch
- Heavy duty transport latch that will accept a padlock, 12 gauge stainless steel
- Stainless steel perforated shelves
- Side mount gravity latch
- Dutch doors
- Cord reel
- Sterno adapter
- Lexan door
- Stainless steel adjustable legs
- Heavy duty bumper system
- Tamper proof fasteners
- Control panel cover, lockable
- Heavy duty perimeter bumper
- Dolly with casters for C5



451 E. County Line Rd. • P.O. Box 1089 • Mooresville, IN 46158
 800-733-8073 • Local 317-831-7030 • Fax 317-831-7036
www.secoselect.com