



TEST OUR METAL®

Job: \_\_\_\_\_

Item No. \_\_\_\_\_

# Mobile Heated Cabinet

## For 18" X 26" or 14" X 18" Trays

- Aluminum Construction with reinforcement channels welded between corner posts for added support and rigidity
- Top is Double Wall Aluminum Construction of .065" Hi-tensile Aluminum Alloy, with welded corner bracing
- Heavy-Duty Frame .080" 6063-T5 aluminum extrusions and interlocking aluminum side panels of .090" thick 6063-T1 architectural aluminum for air tight seal and structural rigidity. The bottom is .100" hi-tensile aluminum
- Doors open 270 degrees, are equipped with center reinforcement and heavy duty flag hinges. Comes standard with aluminum framed polycarbonate door
- Designed to hold 18" X 26" or 14" X 18" trays with 1 1/2" spacing
- SecoSelect® Stainless Steel EvenHeat™ System unit is removable from the front
  - 1250 Watt heating unit has a blower and rear mounted louvered flue to distribute heat evenly throughout cabinet
- Nema 5-15P Plug
- Standard 5" plate type casters, two rigid and two swivel
- Standard Lexan Door

\* ECH-1436-RFM Solid door only

### Models

- ECH-1436-RFM
- ECH-1468-RFM
- ECH-1468-RFMG




ECH-1468-RFMG shown



Made in USA



MODEL #	TRAY CAPACITY		HEIGHT DIM A	WIDTH DIM B	DEPTH DIM C	VOLTAGE	SHIPPING CUBE FEET	SHIP WEIGHT
	18x26	14x18						
ECH-1436-RFM	18	36	35 1/2"	21 3/4"	34 1/2"	120	19	105
ECH-1468-RFM	34	68	65 1/2"	21 3/4"	34 1/2"	120	30	120
ECH-1468-RFMG	34	68	65 1/2"	21 3/4"	34 1/2"	120	30	120

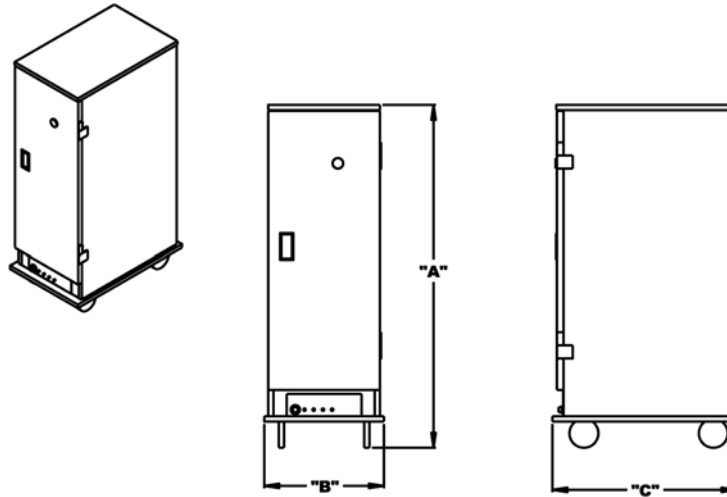

**GENERAL:** Cabinet shall have an all aluminum construction. Cabinet shall have aluminum frame and .90" thick interlocking side panels that are riveted into position.

**INTERNAL FRAME:** Cabinet shall be framed with 1 1/2" x 1 1/2" x 1/8" thick 6063-T5 aluminum tubing in the front and back. Frame shall be fully welded.

**BASE:** Base shall be .100 Aluminum and shall be reinforced with 1/8" thick aluminum cross braces.

**INNER CABINET:** Inner cabinet shall be all aluminum construction. Cabinet shall accommodate 18" x 26" and 14" x 18" sheet pans. Cabinet shall be heated by the EvenHeat™ System.

**DOOR:** Aluminum Framed Polycarbonate Door with integral handle standard. Solid door shall be constructed of .063 aluminum and shall be reinforced. Door shall have two (2) heavy-duty, 5/8" thick extruded flag type hinges. Door shall be removable without tools and shall have recessed handles. Door shall have a heavy-duty positive action magnetic latch.

**ELECTRICAL CHARACTERISTICS:** Cabinet shall have a bottom mounted, heating control panel consisting of: on and off switch, power indicator lights, and thermostat control. Heating unit shall be removable from the front. Cabinet shall be 120 volt, 60 cycles, and 1 phase. Cabinet shall come with cord and Nema #5-15 plug.

**CASTERS:** Cabinet shall come complete with 4-5" non-marking plate casters, two rigid and two swivel. Casters shall have a weight capacity of 200 lbs each.

### Accessories, Options, Variations

- Push Handle With Donut Bumpers
- Transport Locks
- Dutch Style Doors
- Door Gaskets
- RFM - Right Hand Solid Door
- LFM - Left Hand Solid Door
- LFMG – Left Hand Lexan Door
- Left Hand Door (no additional charge)
- Perimeter Bumper Guard

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacement for previously purchased equipment.



451 E. County Line Rd. • P.O. Box 1089 • Mooresville, IN 46158  
 800-733-8073 • Local 317-831-7030 • Fax 317-831-7036  
[www.secoselect.com](http://www.secoselect.com)