

New VIVID Series

Metal Halide Lamp, single-ended

DAYLIGHT



- Luminous efficiency of more than 90 Lm/W
- Color rendering index of more than 95
- High TLCI and TM-30 have been realized
- The excellent product quality of Japan



■ Technical data

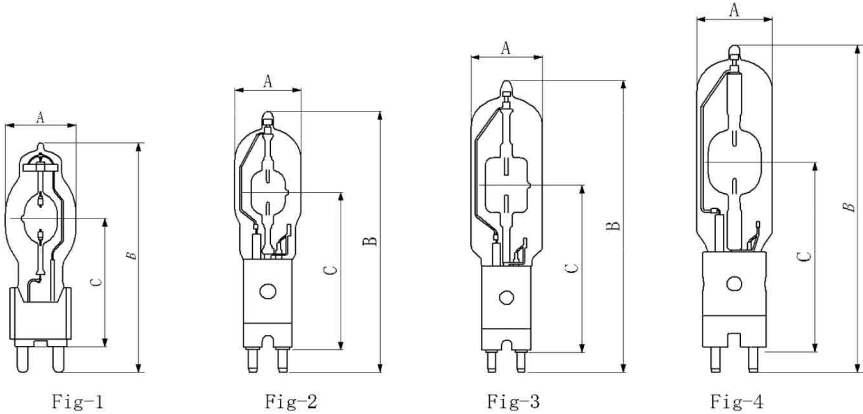


Fig-1

Fig-2

Fig-3

Fig-4

Item	Voltage	Wattage	Burning Direction	CCT (K)	Lumens (Lm)	CRI (Ra)	Life (hrs)	Dimensions(mm)			Schematic	Base
								Diameter	Total Length	Luminous Center		
DIS-40H UV-Block VIVID	200	4,000	ANY	6,000	380,000	>90	500	75	255	142	Fig-1	G38
DIS-60H UV-Block VIVID	120	6,000	ANY	6,000	540,000	>90	300	85	360	210	Fig-2	GX38
DIS-90H VIVID	165	9,000	ANY	6,000	875,000	>90	400	85	360	210	Fig-2	GX38
DIS-120H UV-Block VIVID	160	12,000	ANY	6,000	1,100,000	>90	250	103	450	255	Fig-3	GX38
DIS-180H UV-Block VIVID	225	18,000	ANY	6,000	1,650,000	>90	350	103	470	260	Fig-4	GX51