



www.DUURA.com
Sales@Duura.com • Techservice@Duura.com

Project Name: _____

Location: _____

Item #: _____ Qty: _____

Model: _____

GLASS DOOR REACH-IN REFRIGERATORS

Model: DVRG1

DVRG2



DVRG1



DVRG2

DUURA Glass Door Reach-In Refrigeration pairs durability and longevity with visual appeal. Featuring a bottom mounted compressor, the glass door refrigerators effectively keep product at exactly the right temperature while utilizing energy efficiency. The simple to use but precise digital controls allow for accurate and flexible use of the unit. For energy savings, durability, and visually appealing construction, DUURA glass door refrigeration is sure to impress.

FEATURES

- Easy to grip curved door handle(s)
- 4" diameter swivel casters come standard
- Three (3) heavy-duty, adjustable, PE coated wire shelves per section
- Locking doors to prevent unauthorized access
- Automatic interior lighting
- Available in 115V/60Hz,

TEMPERATURE


- Holding temperature: 33° to 41° F (1° to 5° C)
- Utilizes environmentally friendly refrigerant R134A
- Digitally controlled temperature system maintains optimum temperature
- LED display is easily viewed from exterior
- Automatic defrost system

REFRIGERANT

Environmentally friendly CFC-free R134A

ELECTRIC

115/60Hz/1 Ph (NEMA 5-15)
Cord set includes plug & 9.8' (3m) cord



NEMA 5-15P

CONSTRUCTION

- Exterior and interior material: Durable, easy to clean stainless steel
- CFC-free Polyurethane insulated walls and doors
- Bottom mounted compressor provides energy savings and ease of service



Certified to
ANSI-NSF 7



Certified to
ANSI UL 471

DUURA WARRANTY (USA / CANADA)

One (1) year parts/labor
One (1) compressor (part only)
Administered by DUURA
24/7 tech support provided

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this sheet are subject to change without notice. While we exercise good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications. By using the information provided, the user assumes all risks in connection with such use.

The built in performance enhancing functions ensure that given proper attention and preventative maintenance, each DUURA Product will deliver years of trouble free, reliable, low maintenance, efficient operation.

DUURA

www.DUURA.com
Sales@Duura.com • Techservice@Duura.com

Project Name: _____


Location: _____

Item #: _____ Qty: _____


Model: _____

GLASS DOOR REACH-IN REFRIGERATORS

DVRG1

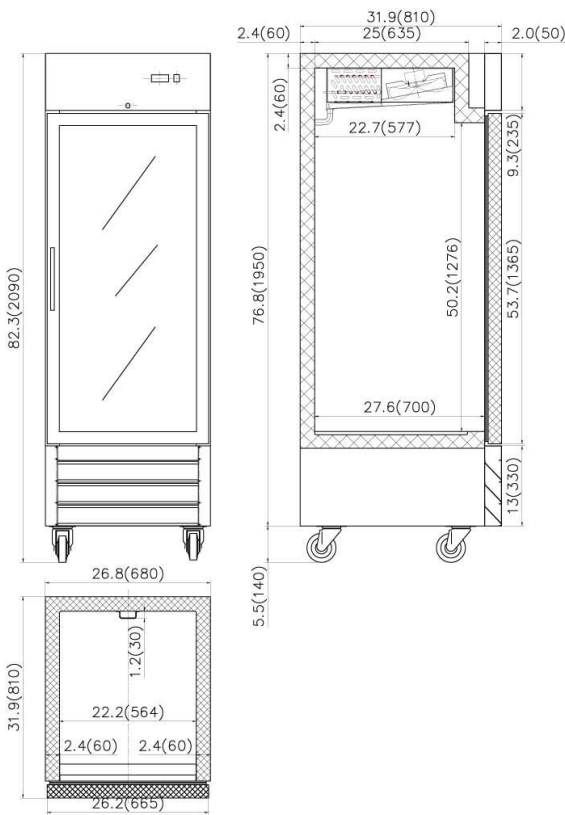

DVRG2

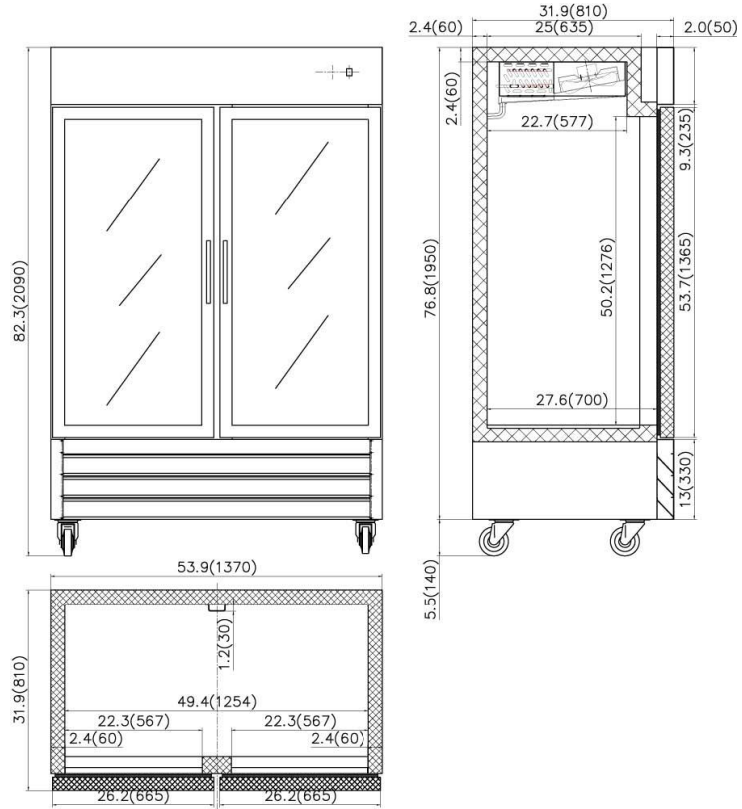

	Dimensions* in / mm	Capacity	Temperature Range	Voltage	Amps	Unit Weight	Adjustable Shelves	Shipping Weight
DVRG1	26.8 x 31.9 x 82.3 681 x 810 x 2090	23 Cu Ft 603 L	33° - 41° F 1° - 5° C	115V/60Hz/1	6	293 lb 133 kg	3	366 lb 166 kg
DVRG2	53.9 x 31.9 x 82.3 1370 x 810 x 2090	49 Cu Ft 512.5 L	33° - 41° F 1° - 5° C	115V/60Hz/1	9	478.4 lb 217 kg	6	597 lb 272 kg

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this sheet are subject to change without notice.

While we exercise good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications.

By using the information provided, the user assumes all risks in connection with such use.