

Sales@Duura.com • Techservice@Duura.com

Project Name:	
Location:	
Item #:	Qty:
Model:	

UNDERCOUNTER REFRIGERATORS

DVUR60

DUURA

Model:

DVUR27

DVUR27

DVUR48

DVUR48





DVUR60

REFRIGERANT

Environmentally-friendly R-134A

ELECTRIC

120/60Hz/1 Ph (NEMA 5-15) Cord set includes plug & 9.8' (3m) cord



NEMA 5-15P

DUURA Undercounter Refrigerator are designed for performance. These undercounter freezers make the most of available space and provide excellent service. The stainless steel exterior provides durability and ensures years of reliable service.

FEATURES

- Easy to grip recessed drawer handles
- 3" casters are standard
- Adjustable shelves (one per section/door)
- Available in multiple sizes to suit your needs
- Available in 120V/60Hz

TEMPERATURE

- Holding temperature: 34° to 40°F (2° to 5°C)
- Utilizes environmentally friendly refrigerant R134A
- Forced-air refrigeration
- Efficient cooling system (two or more fans)
- Automatic defrost system

CONSTRUCTION

- Exterior Material: Durable, easy to clean stainless steel Interior Material: Painted Aluminum
- Urethane insulated walls and doors
- Heavy duty epoxy coated shelves







Compliant

DUURA WARRANTY (USA / CANADA)


One (1) year parts/labor One (1) year compressor (part only) Administered by DUURA 24/7 tech support provided

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this sheet are subject to change without notice. While we exercise good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications. By using the information provided, the user assumes all risks in connection with such use.



Project Name:	
Location:	
Item #:	Qty:
Model:	

UNDERCOUNTER REFRIGERATORS

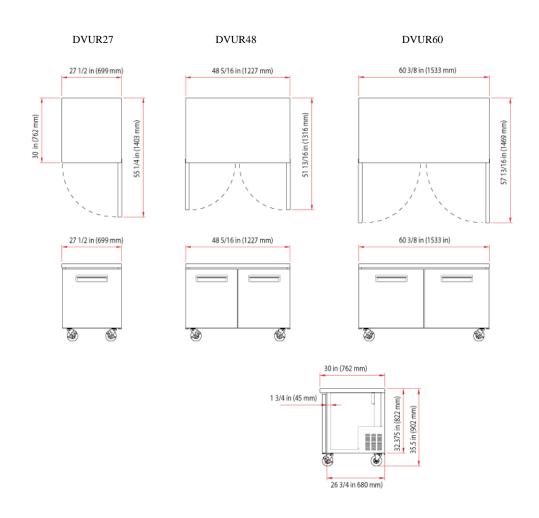

	Dimensions in / mm	Capacity	Temperature Range	Voltage	Amps	Shelves	Unit Weight
DVUR27	27.5 x 30 x 35.5 699 x 762 x 902	6.5 Cu Ft 184 L	34° to 40°F 2°to 5° C	120V/60Hz	5	1	181 lb 82 kg
DVUR48	48.3125 x 30 x 35.5 1227 x 762 x 902	12 Cu Ft 340 L	34° to 40°F 2°to 5° C	120V/60Hz	5	2	256 lb 116 kg
DVUR60	60.375 x 30 x 35.5 1533 x 762 x 902	15.5 Cu Ft 439 L	34° to 40°F 2°to 5° C	120V/60Hz	5	2	305 lb 138 kg

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this sheet are subject to change without notice.

While we exercise good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications.

By using the information provided, the user assumes all risks in connection with such use.