



Curved Decorative Metal Wiring Accessories

SE home  
Bring your house to life

## Premium Decorative Wiring Accessories


A comprehensive range of premium decorative metal wiring accessories is now available under the Deco Plus® brand. A brand that is synonymous with high specification, exceptional quality and unprecedented value.

The smooth contemporary curves of the Deco Plus® range are available in eight finishes to complement any room.

Each product is supplied individually packaged in its own distinctive printed box complete with full fitting instructions.

Deco Plus® switches feature the same modular switch design as our moulded ranges. All of the switch modules featured in our Minigrid® brochure can therefore be used in any combination on Deco Plus® accessories.

All Deco Plus® 13A sockets and fused connection units are tested and approved to BS1363 offering assured quality and safety.

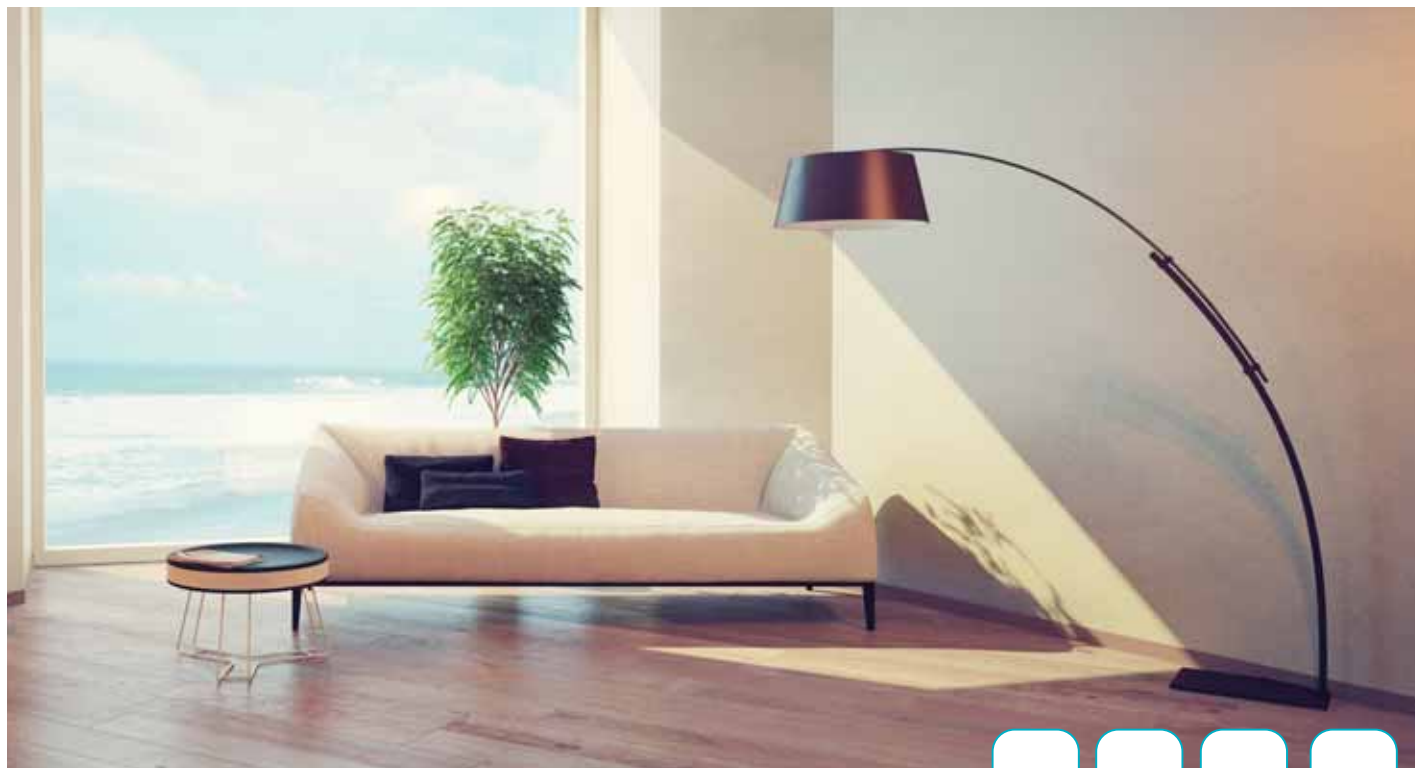

Antique Brass\*  
(AB)



Satin Brass\*  
(SB)



Satin Chrome\*  
(SC)

All Deco Plus® products featured in the pages of this brochure are available in eight distinctive quality finishes.



Black Nickel  
(BN)



Stainless Steel  
(SS)



Polished Chrome  
(CH)

All Deco Plus® products are available with Black or White Inserts.

*(Excluding Antique Brass, Black Nickel & Matt Black finishes, which are supplied with Black Insert and Gasket only).*



Polished Brass  
(BR)



Matt Black  
(MB)

A selection of Stainless Steel and Satin Chrome finishes are now available with Grey Inserts.

## Contents

New Features	<b>C7</b>
Switches	<b>C10</b>
Back Boxes	<b>C19</b>
Power Socket Outlets	<b>C22</b>
Socket & Blank Plates	<b>C24</b>
13A Fused Connection Units	<b>C25</b>
Control Switches	<b>C26</b>
Key Lockable Switch & Socket	<b>C28</b>
Telephone & Data Sockets	<b>C30</b>
TV & Satellite	<b>C31</b>
New Media™ Plates	<b>C33</b>
Yokes & Back Boxes	<b>C34</b>

AHEAD OF THE  
**CURVE**



deco  
PLUS 



# New Features

...plus so much more

Attention to detail has been at the forefront of the design process for our newest range of wiring accessories. All aspects, no matter how small, have been taken into account and collectively create the elegant style that characterises.



Every accessory within the range which contains a neon now has an insert surrounding the lens of the neon.



An attractive feature added to the range is the profile of the cooker sockets. Instead of the traditional T-bar shape, our new range matches the profile of our ingot sockets.

# Switches



Please see page K18 for a selection of Minigrid® modules.

**MINIGRID®**

All switches are supplied complete with requisite switch module(s). However, should local conditions dictate, the installer may customise a switch arrangement by substituting switch modules by means of a simple, single fixing screw.

A comprehensive range of available modules is illustrated in our dedicated Minigrid® brochure.

Unfurnished mounting plates can be ordered separately and furnished with whatever selection of switch modules may be required.

All Deco Plus® switch plates are modular as standard, allowing you to create virtually any switch plate you require.

## Switches

C10



**MINIGRID®** Switch modules interchangeable with MiniGrid® Modules.  
For the complete range of MiniGrid® modules, see the dedicated MiniGrid® section, page K18.

### Ingot Plates Switches - MiniGrid®

- 411 10AX Ingot 1 Gang 2 Way Plate Switch
- 412 10AX Ingot 2 Gang 2 Way Plate Switch
- 413 10AX Ingot 3 Gang 2 Way Plate Switch
- 414 10AX Ingot 4 Gang 2 Way Plate Switch
- 416 10AX Ingot 6 Gang 2 Way Plate Switch
- 425 10AX Ingot 1 Gang Intermediate Plate Switch

**Standards:** BS EN 60669-1

**Back Box Depth (mm):** 1 Gang: 16 2 Gang: 25

**Cable Size (mm<sup>2</sup>):** 4 x 1.5 or 2 x 2.5

**Dimensions (mm):** 1 Gang: 88 (W) x 88 (H) x 8 (D) 2 Gang: 146 (W) x 88 (H) x 8 (D)

## Unfurnished Plates

C11



**MINIGRID®** For the complete range of MiniGrid® modules, see the dedicated MiniGrid® section, page K18.

### Unfurnished Plates - MiniGrid®

- 401 1 Gang MiniGrid® Unfurnished Plate - 1 Aperture
- 402 1 Gang MiniGrid® Unfurnished Plate - 2 Apertures
- 403 1 Gang MiniGrid® Unfurnished Plate - 3 Apertures
- 404 2 Gang MiniGrid® Unfurnished Plate - 2 x 2 Apertures
- 406 2 Gang MiniGrid® Unfurnished Plate - 2 x 3 Apertures
- 426 2 Gang MiniGrid® Unfurnished Plate - 6 In-Line Apertures

### Architrave Unfurnished Plates - MiniGrid®

- 471 1 Gang MiniGrid® Unfurnished Architrave Plate - 1 Aperture
  - 472 2 Gang MiniGrid® Unfurnished Architrave Plate - 2 Apertures
- These plates must be used with the architrave back boxes WA671 / WA672 and can only be flush mounted.  
Not compatible with MD070 & MD075 Switch modules.

**Standards:** BS 5733

**Back Box Depth (mm):** Dependent On Module Fitted

**Dimensions (mm):** 1 Gang: 88 (W) x 88 (H) x 8 (D) 2 Gang: 146 (W) x 88 (H) x 8 (D)

Single architrave: 35 (W) x 88 (H) x 8 (D) Twin architrave: 35 (W) x 150 (H) x 8 (D)

# Toggle Switches & Dimming

## Switches

C13



421



422



MD9125



423



424

MD9125 Intermediate module available.

Satin Chrome & Stainless Steel plate finishes require the use of a Pearl Nickel (PN) Toggle Switch Module. Not interchangeable with dimmers or other MiniGrid® modules.

### Toggle Switches

- 421 10AX 1 Gang 2 Way Toggle Switch
- 422 10AX 2 Gang 2 Way Toggle Switch
- 423 10AX 3 Gang 2 Way Toggle Switch
- 424 10AX 4 Gang 2 Way Toggle Switch

### 10AX Intermediate Toggle Switch Modules

- MD9125AB Intermediate Toggle Switch Module - Antique Brass
  - MD9125BN Intermediate Toggle Switch Module - Black Nickel
  - MD9125BR Intermediate Toggle Switch Module - Polished Brass
  - MD9125CH Intermediate Toggle Switch Module - Polished Chrome
  - MD9125PN Intermediate Toggle Switch Module - Pearl Nickel
  - MD9125MB Intermediate Toggle Switch Module - Matt Black
- Toggle Modules only fit in existing toggle plates

A wide selection of toggle switches and dimmers for within your home.

**Standards:** BS EN 60669-1

**Back Box Depth (mm):** 25 **Cable Size (mm<sup>2</sup>):** 4 x 1.5 or 2 x 2.5

**Dimensions (mm):** 1 Gang: 88 (W) x 88 (H) x 8 (D) 2 Gang: 146 (W) x 88 (H) x 8 (D) **Modules:** 25 (W) x 62 (H) x 22 (D)

## Switches

C14



**MINIGRID®**

Interchangeable modules available on page K37. For the complete range of MiniGrid® modules, see the MiniGrid® section.

We recommend the use of branded halogen lamps with all Deco Plus® leading edge dimmers. The use of inferior, non-branded lamps may require the nominal rating of the dimmer to be reduced. These dimmer switches have not been designed to use with LED lamps. However, they may be suitable for some good quality LED lamps. For further information please contact Click® Technical support team.

We recommend the use of branded LED lamps with all Deco Plus® trailing edge dimmers.

### Dimmer Switches (Leading Edge)

- 140** 1 Gang 2 Way 400Va Dimmer Switch
- 152** 2 Gang 2 Way 400Va Dimmer Switch
- 153** 3 Gang 2 Way 400Va Dimmer Switch
- 154** 4 Gang 2 Way 400Va Dimmer Switch

### Dimmer Switches (Trailing Edge)

- 161** 1 Gang 2 Way 100W Dimmer Switch
- 162** 2 Gang 2 Way 100W Dimmer Switch
- 163** 3 Gang 2 Way 100W Dimmer Switch
- 164** 4 Gang 2 Way 100W Dimmer Switch

**Standards:** BS EN 60669-1 BS EN 55015 BS EN 61000-3-2 400Va: BS EN 61000-3-3 100W: BS EN 60669-2-1

**Type:** 400Va: Leading Edge 100W: Trailing Edge

**Back Box Depth (mm):** 25 **Cable Size (mm<sup>2</sup>):** 2 x 1.5

**Dimensions (mm):** 1 Gang: 88 (W) x 88 (H) x 8 (D) 2 Gang: 146 (W) x 88 (H) x 8 (D)

## Unfurnished Dimmer Plates

C15

### Dimmer Modules

- MD9001** 6A 2 Way Push On/Off (Non-Dimming) Module (25 x 62mm)
- MD9010** 1-10V Analogue Dimmer Module (25 x 62mm)
- MD9022** 250W 2 Leading Edge Way Dimmer Module (25 x 62mm)
- MD9042** 400W 2 Way Leading Edge Dimmer Module (25 x 62mm)
- MD9014** 100W Dual Mode Dimmer Module with Trim (26.5 x 55mm)

### Dimmer M10 Nut Runner

- SP900** Dimmer M10 Nut Runner Tool

Use the nut runner to easily exchange dimmer modules and create customised dimmer switch plate



SP900

MD9014



140PL

152PL

153PL

185

186

The dimmer modules are supplied separately. For recessed wall boxes and longer fixing screws see page Ng

### Dimmer Mounting Unfurnished Plates

- 140PL** 1 Gang Dimmer Plate & Knob (650W Max) - 1 Aperture
- 152PL** 2 Gang Dimmer Plate & Knobs (800W Max) - 2 Apertures
- 153PL** 3 Gang Dimmer Plate & Knobs (1200W Max) - 3 Apertures
- 154PL** 4 Gang Dimmer Plate & Knobs (1600W Max) - 4 Apertures
- 185** 1 Gang Dimmer Plate & Knob (1000W Max) - 1 Aperture
- 186** 2 Gang Dimmer Plate & Knobs (1630W Max) - 2 Apertures

**Standards:** BS 5733

**Back Box Depth (mm):** 25

**Dimensions (mm):** 1 Gang: 88 (W) x 88 (H) x 8 (D) 2 Gang: 146 (W) x 88 (H) x 8 (D)



# Interchangeable Plates & Modules

Minigrid® modules are interchangeable with pre-assembled plate switches or can be mounted into the unfurnished switch plates throughout the Deco Plus® range.

Standard Minigrid® modules offer simple, single screw fixing to the yoke which greatly facilitates the assembly of up to 18 different switching functions on a single plate.



**MINIGRID®**

Minigrid® modules are available in the same decorative finishes as the Deco Plus® range as well as white and black, so there are plenty of options available to suit your application.

## Unfurnished Plates

C18

The furnished plate shown here contains a selection of both single and twin width MiniGrid® modules.  
For the full range please see the MiniGrid® section.



512

2 Tier Unfurnished Plates c/w Gaskets - MiniGrid®

**512** 2 Tier MiniGrid® Unfurnished Plate - 12 Apertures  
2 x GR100 Yokes required, see page C19



518

3 Tier Unfurnished Plates c/w Gaskets - MiniGrid®

**518** 3 Tier MiniGrid® Unfurnished Plate - 18 Apertures  
3 x GR100 Yokes required, see page C19

**MINIGRID®**

If dimmer modules are to be mounted directly above each other, the MD9014 (page K37) or similar height dimmer modules must be installed. Alternatively, retractive switch modules MD004 (page K21) can be used in conjunction with Click Smart+ dimming receivers (page A22).

Standards: BS 5733  
Back Box Depth (mm): 47  
Dimensions (mm): 512: 146 (W) x 146 (H) x 8 (D) 518: 146 (W) x 227 (H) x 8 (D)

## Back Boxes

C19

Example of yoke furnished with modules



**MINIGRID®**

Galvanised steel back boxes supplied for flush mounting of the large MiniGrid® plates. Mounting Yoke facilitates pre-assembly of required modules. Fitted with twin earth terminals.



GR100

WA512

WA518

Yokes

**GR100BK** MiniGrid® Module Yoke - 6 Apertures - Black  
**GR100PW** MiniGrid® Module Yoke - 6 Apertures - White  
**GR100GY** MiniGrid® Module Yoke - 6 Apertures - Grey

2 or 3 yokes are required based on the backbox selected.

Galvanised Steel Back Boxes

**WA512** 2 Tier 47mm Deep K.O. Box  
**WA518** 3 Tier 47mm Deep K.O. Box

Standards: 512 518: BS 4662  
Dimensions (mm): 512: 137 (W) x 137 (H) x 47 (D) 518: 137 (W) x 197 (H) x 47 (D) 100: 129 (W) x 55 (H) x 14 (D)



## Power Socket Outlets, Fused Connection Units & Control Switches

With the ever increasing demand for power supplies in all areas of the home, comes the problem of selecting and fitting outlets which blend harmoniously with the décor of the room in which they are to be fitted.

The eight different Deco Plus® plate finishes offer a solution for almost every possible design need and will enhance the décor of any area, whether in a kitchen, bedroom, lounge or study etc.

## Power Socket Outlets

Safety Shutter Sockets (Excluding USB options) are only available for sale in the Republic of Ireland.



535



536



1535



1536

### Ingot Switched Socket Outlets

- 535** 13A Ingot 1 Gang DP Switched Socket
- 536** 13A Ingot 2 Gang DP Switched Socket (Twin Earth)
- 1535** 13A Ingot 1 Gang DP 3 Pin Safety Shutter Switched Socket Outlet
- 1536** 13A Ingot 2 Gang DP 3 Pin Safety Shutter Switched Socket Outlet (Twin Earth)



836



1836

### Ingot Switched Socket Outlets With Outboard Rockers

- 836** 13A Ingot 2 Gang DP Switched Socket With Outboard Rockers (Twin Earth)
- 1836** 13A Ingot 2 Gang DP 3 Pin Safety Shutter Outboard Switched Socket Outlet (Twin Earth)

**Standards:** BS 1363-2  
**Back Box Depth (mm):** 25  
**Cable Size (mm<sup>2</sup>):** 3 x 2.5 or 2 x 4  
**Dimensions (mm):** 1 Gang: 88 (W) x 88 (H) x 8 (D) 2 Gang: 146 (W) x 88 (H) x 8 (D)

## Power Socket Outlets

Safety Shutter Sockets (Excluding USB options) are only available for sale in the Republic of Ireland.



571U



570



580



586

### Ingot Switched Sockets With USB Outlet

- 571U** 13A Ingot 1 Gang Switched Socket With 2.1A USB Outlet (Twin Earth)
- 570** 13A Ingot 2 Gang Switched Socket With 2.1A USB Outlet (Twin Earth)

### Ingot Switched Sockets With Twin USB Outlets

- 580** 13A Ingot 2 Gang Switched Socket With Twin 2.1A USB Outlets (4.2A) (Twin Earth)
- 586** 13A Ingot 2 Gang Switched Safety Shutter Socket Outlet With Type A & C USB (4.2A) Outlets (Twin Earth)



038



039

### Round Pin Socket Outlets

- 038** 5A Round Pin Socket
- 039** 2A Round Pin Socket


**Standards:** BS 1363-2:2016 +A1:2018 BS EN IEC 62368-1 BS EN 62680-1-1 **038 039:** BS 546  
**Back Box Depth (mm):** 25 **Cable Size (mm<sup>2</sup>):** 3 x 2.5 or 2 x 4 **038:** 4 x 1.5 or 3 x 2.5 **039:** 3 x 1.5  
**Dimensions (mm):** 1 Gang: 88 (W) x 88 (H) x 8 (D) 2 Gang: 146 (W) x 88 (H) x 8 (D)

## Socket & Blank Plates

C24



Click® dual voltage shaver outlets incorporate a double wound isolating transformer rated 20Va at 230V or 115V and meets BS EN 61558-2-5:2010 making it safe for use in bathrooms. This outlet is not continuously rated and therefore not suitable for use as a permanent charging outlet.

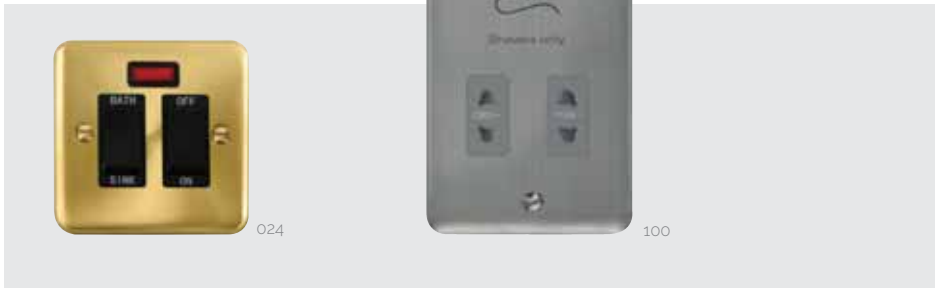

20A DP Sink/Bath Switch

024 20A DP Sink/Bath Switch With Neon

Dual Voltage Shaver Socket

100 115/230V Dual Voltage Shaver Socket



Blank Plates

060 1 Gang Blank Plate

061 2 Gang Blank Plate

**Standards:** 024: BS EN 60669-1 060, 601: BS 5733 100: BS EN IEC 61558-1 BS EN 61558-2-5  
**Back Box Depth (mm):** 024, 060: 16 061: 25 100: 47 **Cable Size (mm<sup>2</sup>):** 024: 3 x 2.5 100: 2 x 1.5 or 1 x 2.5  
**Dimensions (mm):** 1 Gang: 88 (W) x 88 (H) x 8 (D) 2 Gang: 146 (W) x 88 (H) x 8 (D) 100: 88 (W) x 146 (H) x 8 (D)

## 13A Fused Connection Units

C25



Ingot Fused Connection Units With Optional Flex Outlet

- 550 13A Ingot Fused Connection Unit
- 551 13A Ingot DP Switched Fused Connection Unit
- 552 13A Ingot DP Switched Fused Connection Unit With Neon
- 553 13A Ingot Fused Connection Unit With Neon



Ingot Fused Connection Units Without Flex Outlet

- 750 13A Ingot Fused Connection Unit
- 751 13A Ingot DP Switched Fused Connection Unit
- 752 13A Ingot DP Switched Fused Connection Unit With Neon
- 753 13A Ingot Fused Connection Unit With Neon

**Standards:** BS 1363-4 BS 1362  
**Back Box Depth (mm):** 25 **Cable Size (mm<sup>2</sup>):** 3 x 2.5 or 2 x 4  
**Dimensions (mm):** 88 (W) x 88 (H) x 8 (D)

## Control Switches

C26



520

### Ingot Fan Isolation Switch

520 10A Ingot 3 Pole Fan Isolation Plate Switch

This Product Is Not Modular



522

523

722

723

### Ingot 20A Control Switches With Optional Flex Outlet

522 20A Ingot DP Switch

523 20A Ingot DP Switch With Neon

### Ingot 20A Control Switches Without Flex Outlet

722 20A Ingot DP Switch

723 20A Ingot DP Switch With Neon

**Standards:** BS EN 60669-1 BS EN 60669-2-4

**Back Box Depth (mm):** 10A: 16 20A: 25 **Cable Size (mm<sup>2</sup>):** 10A: 4 x 1.5 or 2 x 2.5 20A: 3 x 2.5

**Dimensions (mm):** 1 Gang: 88 (W) x 88 (H) x 8 (D)

## Control Switches

C27



500

501

504



502

503

505

### Ingot 45A Switches And Socket Outlets

500 45A Ingot 1 Gang DP Switch

501 45A Ingot 1 Gang DP Switch With Neon

502 45A Ingot 2 Gang DP Switch

503 45A Ingot 2 Gang DP Switch With Neon

504 45A Ingot 2 Gang DP Switch With 13A DP Switched Socket

505 45A Ingot 2 Gang DP Switch With 13A DP Switched Socket & Neons

**Standards:** 500 501 502 503: BS EN 60669-1 504 505: BS 4177

**Back Box Depth (mm):** 35 **Cable Size (mm<sup>2</sup>):** 45A: 1 x 16

**Dimensions (mm):** 1 Gang: 88 (W) x 88 (H) x 8 (D) 2 Gang: 146 (W) x 88 (H) x 8 (D) 502 503: 88 (W) x 146 (H) x 8 (D)

## Key Lockable Switch & Socket

C28



660

655

Two keys provided (Spare keys available: SP660).

### Lockable Switches

**660** 20A Double Pole Key Lockable Switch

### Ingot Lockable Sockets

**655** 13A Ingot 1 Gang DP Key Lockable Socket With Neon



# Television, Telephone & Data Sockets

The following pages contain details of Deco Plus® products designed to deal with handling data and media transfer through telephone, computer, television or radio.

**Standards:** BS EN 60669-1 **655:** BS 1363-2  
**Back Box Depth (mm):** 35 **Cable Size (mm<sup>2</sup>):** 3 x 2.5 or 2 x 4  
**Dimensions (mm):** 1 Gang: 88 (W) x 88 (H) x 8 (D) 2 Gang: 146 (W) x 88 (H) x 8 (D)

## Telephone Outlets

C30



Twin outlets are 2 separate sockets and are not internally linked together.

### RJ11 Telephone Outlets

**115** Single RJ11 (Irish/US) Outlet

### Telephone Outlets

**120** Single Telephone Outlet - Master

**125** Single Telephone Outlet - Secondary

**121** Twin Telephone Outlet - Master

**126** Twin Telephone Outlet - Secondary

**Back Box Depth (mm):** 16 115: 35  
**Termination Type:** IDC 115: Screw  
**Dimensions (mm):** 88 (W) x 88 (H) x 8 (D)

## TV & Satellite

C31



### Non-isolated Coaxial Outlets (Unshielded)

**065** Single Coaxial Outlet

**066** Twin Coaxial Outlet

### Isolated Coaxial Outlets (Unshielded)

**158** Single Isolated Coaxial Outlet

**159** Twin Isolated Coaxial Outlet

### Satellite Outlets (Unshielded)

**156** Non-isolated Single Satellite Outlet

**157** Isolated Satellite & Isolated Coaxial Outlet

**170** Non-isolated Satellite & Non-isolated Coaxial Outlet

Isolated outlets will filter out any interference.

If a 2 way signal is required, i.e. for use with satellite hard wire extensions, then a non-isolated outlet is required.

**Back Box Depth (mm):** 16  
**Dimensions (mm):** 88 (W) x 88 (H) x 8 (D)



# Solutions for media cabling

new  
media™

## Unfurnished Plates

The furnished plate shown here contains a selection of both single and twin width New Media™ modules.

The New Media™ range provides the installer with ultimate flexibility, allowing you to mix and match the connections you have on your wall plate.

All modules are available in white or black finishes to complement any installation.



310

311

312

new  
media™

All plates supplied with black and white gaskets where applicable.

Above are some examples of New Media™ modules we offer, please see our dedicated New Media™ section for more information on the range of modules available.

### Unfurnished Plates - New Media™

- 310 1 Gang New Media™ Unfurnished Plate - 1 Aperture
- 311 1 Gang New Media™ Unfurnished Plate - 2 Apertures
- 312 2 Gang New Media™ Unfurnished Plate - 4 Apertures

**Standards:** BS 5733

**Back Box Depth (mm):** Dependent On Modules Fitted

**Dimensions (mm):** 1 Gang: 88 (W) x 88 (H) x 8 (D) 2 Gang: 146 (W) x 88 (H) x 8 (D)

Selecting from a range of module inserts covering all manner of media transfer, installers will now be able to configure their own arrangement of television, radio or satellite reception, plus speaker, telephone and data outlets. All modules can be inserted into single or double wall plates and fitted onto standard switch and socket boxes.