

Decorative Metal Wiring Accessories in Assorted Plate Finishes

**click deco** 



A comprehensive range of decorative metal wiring accessories now available under the single DECO brand. A brand that is synonymous with high specification, high quality, long life and unprecedented value for money.

Each product is supplied individually packaged in its own distinctive printed box complete with comprehensive fitting instructions.

DECO switches feature the same modular switch design as our moulded ranges. All of the switch modules featured in our dedicated MODULES brochure can therefore be used in any combination on DECO accessories.

All Deco 13A Sockets and Fused Connection units are tested and approved to BS1363 offering assured quality and safety.

### contents

Switches	b!
Power Socket Outlets	b1
13A Fused Connection Units	b16
Control Switches	b18
TV, Telephone and Data	b24
New Media	b2
Galvanised / Cavity boxes and Longer Screws	b2



Every DECO product featured in the pages of this brochure are available in 9 distinctive quality finishes: Antique brass\*, polished brass, polished chrome, satin chrome\*, satin brass\*, black nickel, pearl nickel, stainless steel and Georgian style cast brass. \*UK Design Registration 3015621.

All DECO products are available with black or white inserts, excluding antique brass and black nickel finishes which are supplied with black insert and gasket only.



Polished Chrome (CH)



Satin Brass (SB)



Antique Brass (AB)



Polished Bras



Satin Chro



Stainless Stee (SS)



Black Nickel (BN)



Pearl Nickel (PN)



Georgian Style (GCBR)





e.g. Two way switch next to an intermediate switch (shown above).







### 10AX Plate Switches (Modular)

011 10AX 1 Gang 2 Way Switch
 012 10AX 2 Gang 2 Way Switch
 013 10AX 3 Gang 2 Way Switch

Switch modules interchangeable with MiniGrid Modules

### 10AX Plate Switches (Modular)

1019 10AX 4 Gang 2 Way Switch
105 10AX 6 Gang 2 Way Switch
025 10AX 1 Gang Intermediate Switch
Switch modules interchangeable with MiniGrid Modules

For the complete range of MiniGrid modules, see the dedicated MiniGrid section, page h1.

Standards: BSEN60669

Back Box Depth: 16mm Minimum Cable Size: 4 x 1.5mm² / 2 x 2.5mm² / 1 x 6mm² Maximum Dimensions: 1 Gang (88mm x 88mm x 8mm), 2 Gang (146mm x 88mm x 8mm)





### 'Ingot' 10AX Plate Switches (Modular)

411 10AX 1 Gang 2 Way 'Ingot' Switch
 412 10AX 2 Gang 2 Way 'Ingot' Switch
 413 10AX 3 Gang 2 Way 'Ingot' Switch

Switch modules interchangeable with MiniGrid Modules

For the complete range of MiniGrid modules, see the dedicated MiniGrid section, page h1.

### 'Ingot' 10AX Plate Switches (Modular)

414 10AX 4 Gang 2 Way 'Ingot' Switch
416 10AX 6 Gang 2 Way 'Ingot' Switch
425 10AX 1 Gang Intermediate 'Ingot' Switch
Switch modules interchangeable with MiniGrid Modules

Standards: BSEN60669

Back Box Depth: 16mm Minimum Cable Size: 4 x 1.5mm<sup>2</sup> / 2 x 2.5mm<sup>2</sup> / 1 x 6mm<sup>2</sup> Maximum Dimensions: 1 Gang (88mm x 88mm x 8mm), 2 Gang (146mm x 88mm x 8mm)







### Switch Plates (Unfurnished)

401	1 Gang Plate Single Aperture
402	1 Gang Plate Twin Aperture
403	1 Gang Plate Triple Aperture
404	2 Gang Plate (2+2) Aperture
406	2 Gang Plate (3+3) Aperture
426	2 Gang Plate 6 In-Line Aperture
432	2 Gang Plate 3 In-Line Aperture

Please note 432 is not available in BN, PN or GCBR. See range of MiniGrid Modules in the MiniGrid section

### Architrave Switch Plates (Unfurnished)


471 1 Gang Single Aperture Architrave Switch Plate
 472 2 Gang Twin Aperture Architrave Switch Plate
 These plates must be used with the dedicated architrave back boxes WA571 / WA572 and can only be flush mounted. See page b27 / k4.

For the complete range of MiniGrid modules, see the dedicated MiniGrid section, page h1.

Back Box Depth: Dependant on modules used Cable Size: Dependant on modules used Dimensions: 1 Gang (88mm x 88mm x 8mm), 2 Gang (146mm x 88mm x 8mm), Single architrave (35mm x 88mm x 8mm), Twin architrave (35mm x 150mm x 8mm)



# Switches 12 & 18 Module Plates (Unfurnished)

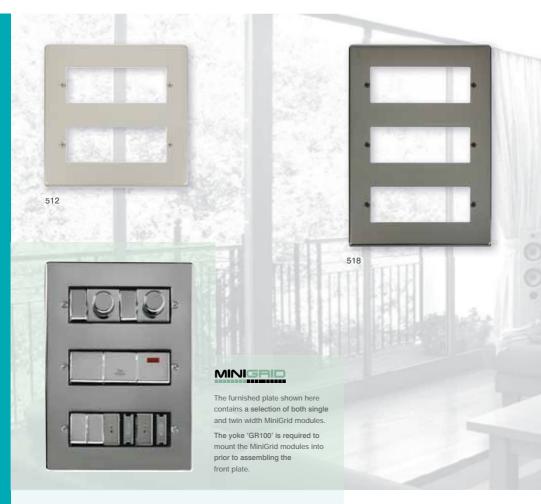

### 12 Module Plate Range

512 12 MiniGrid Module Plate

### 18 Module Plate Range

518 18 MiniGrid Module Plate

### **Back Boxes**

Yokes | 'Back Boxes





#### Yokes

GR100BK 6 MiniGrid Module Yoke - Black
GR100PW 6 MiniGrid Module Yoke - Polar White
GR100WH 6 MiniGrid Module Yoke - Click White

### **Back Boxes**

WA512 2 Gang Double Row K/O Box 47mm DeepWA518 2 Gang Triple Row K/O Box 47mm Deep

Galvanised steel back boxes supplied for flush mounting of the large MiniGrid plates.

Mounting Yoke facilitates pre-assembly of required modules. Fitted with twin earth terminals.

Yokes & recommended ranges:

Black - Deco Click White - Deco Polar White - Polar

**Dimensions:** 512: 137mm x 137mm 518: 137mm x 197mm







### Dimmer Switches For Tungsten, Halogen & Low Voltage

140	1 Gang 2 Way 400W/Va Resistive/Inductive Dimmer Switch
152	2 Gang 2 Way 400W/Va Resistive/Inductive Dimmer Switch
153	3 Gang 2 Way 400W/Va Resistive/Inductive Dimmer Switch

4 Gang 2 Way 400W/Va Resistive/Inductive Dimmer Switch

Switch modules interchangeable with MiniGrid Modules.

We recommend the use of branded halogen lamps with all DECO dimmers. The use of inferior, non-branded lamps may require the nominal rating of the dimmer to be reduced.

These dimmer switches have not been designed for use with LED lamps. However, they may be suitable for some good quality LED lamps. For further information please contact the Click Technical support team.

Standards: BSEN60669, BSEN55015 Type: Leading Edge

Back Box Depth: 25mm Cable Size: 2 x 1.5mm<sup>2</sup>





### **Dimmer Mounting Plates & Dimmer Knobs**

Single Dimmer Plate 1000W Max. (Double Plate)
 Twin Dimmer Plate 1630W Max. (Double Plate)

The dimmer modules are supplied separately to the plates listed above.

Maximum Wattage: 185: 1000W, 186: 1630W Back Box Depth: Up to 400W: 25mm 630W: 47mm Cable Size: 2 x 1.5mm² Dimensions: 1 Gang (88mm x 88mm x 8mm), 2 Gang (146mm x 88mm x 8mm)







422





423

### 10AX Intermediate Toggle Switch Module

MD9125 10AX Intermediate Toggle Switch Module

Module FinishPlate FinishCH - ChromeChrome

PN - Peari Nickei Peari Nickei, Salin Chrome & Stainless Stee

BN - Black Nickel Black Nickel
AB - Antique Brass Antique Brass



MD9125

### 10AX Toggle Switches

 421
 10AX 1 Gang 2 Way Toggle Switch

 422
 10AX 2 Gang 2 Way Toggle Switch

 423
 10AX 3 Gang 2 Way Toggle Switch

 424
 10AX 4 Gang 2 Way Toggle Switch

Intermediate module available, see above.

Not interchangeable with dimmers or other MiniGrid modules.

#### Plate Finish

Chrome Stainless Steel, Pearl Nickel & Satin Chrome Brass & Satin Brass Black Nickel Antique Brass

### Toggle Switch Finish

Chrome
Pearl Nickel
Brass
Black Nickel
Antique Brass

Standards: BSEN60669

Back Box Depth: 16mm Minimum Cable Size: 2 x 2.5mm² / 4 x 1.5mm² Dimensions: 1 Gang (88mm x 88mm x 8mm), 2 Gang (146mm x 88mm x 8mm)



# Power Socket Outlets, Fused Connection Units & Control Switches

13A Wall Socket Outlets | Round Pin Wall Socket Outlets | Fused Connection Units Fan Isolation Switches | DP Switches


With the ever increasing demand for power supplies in all areas of the home comes the problem of selecting and fitting outlets which blend harmoniously with the décor of the room in which they are to be fitted.

The 9 different DECO plate finishes offer a solution for almost every possible design need and will enhance the décor of any area whether in a kitchen, bedroom, lounge or study etc...





## Power Socket Outlets

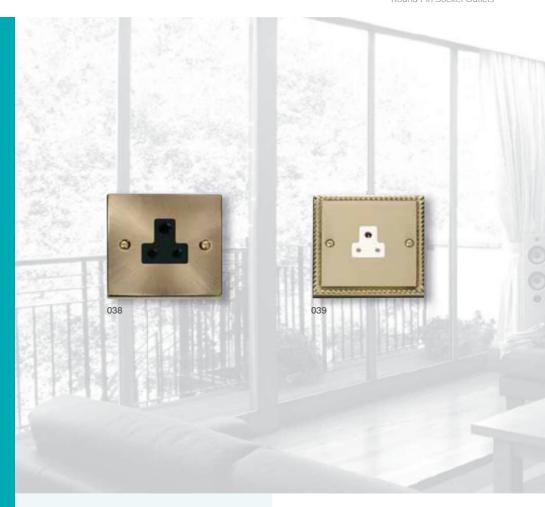

### Round Pin Socket Outlets

038 5A Round Pin Socket Outlet 039 2A Round Pin Socket Outlet

Standards: 038,039: BS546

**Back Box Depth:** 25mm Minimum **Cable Size: 2A:** 2 x 2.5mm<sup>2</sup> / 3 x 1.5mm<sup>2</sup> **5A:** 2 x 2.5mm<sup>2</sup> / 3 x 1.5mm<sup>2</sup>

Dimensions: 1 Gang (88mm x 88mm x 8mm)

### Power Socket Outlets

UK Switched Socket Outlets | UK 'Ingot' Switched Socket Outlets





### 13A UK Socket Outlets

035 13A 1 Gang DP Switched Socket Outlet

036 13A 2 Gang DP Switched Socket Outlet (Twin Earth)

037 13A 2 Gang DP Switched Socket Outlet (Twin Earth, Clean Earth)

### 13A 'Ingot' Switched Socket Outlets

535 1 Gang DP 'Ingot' Switched Socket Outlet

536 2 Gang DP 'Ingot' Switched Socket Outlet (Twin Earth)

Standards: BS1363

Back Box Depth: 25mm Minimum Cable Size: 4 x 2.5mm<sup>2</sup>

### deco 13A Fused Connection Units

Fused Connection Units With Flex Outlet | Fused Connection Units Without Flex Outlet



### 13A Fused Connection Units With Optional Flex Outlet

**O50** FCU with Flex Outlet

051 FCU Switched with Flex Outlet

052 FCU Switched with Flex Outlet & Neon

053 FCU with Flex Outlet & Neon

### 13A Fused Connection Units (Without Flex Outlet)

650 FCI

651 FCU Switcher

652 FCU Switched with Neon

653 FCU with Neon

Standards: BS1363 and BS1362 (fuse)

Back Box Depth: 25mm Minimum Cable Size: 4 x 2.5mm<sup>2</sup>

### 13A Fused Connection Units deco

'Ingot' Fused Connection Units With Flex Outlet | 'Ingot' Fused Connection Units Without Flex Outlet



### 13A 'Ingot' Fused Connection Units With Optional Flex Outlet

550 FCU 'Ingot' with Flex Outlet 551 FCU 'Ingot' Switched with Flex Outlet

552 FCU 'Ingot' Switched with Flex Outlet & Neon

553 FCU 'Ingot' With Flex Outlet with Neon

### 13A 'Ingot' Fused Connection Units (Without Flex Outlet)

FCU 'Ingot' 750

751 FCU 'Ingot' Switched

752 FCU 'Ingot' Switched with Neon

753 FCU 'Ingot' with Neon

Standards: BS1363 and BS1362 (fuse)

Back Box Depth: 25mm Minimum Cable Size: 4 x 2.5mm<sup>2</sup>



20A DP Switch With Flex Outlet | 20A DP Switch Without Flex Outlet | Fan Isolation Switch



### 20A DP Switch with Optional Flex Outlet (11mm Dia.)

20A DP Switch with Flex Outlet

023 20A DP Switch with Flex Outlet & Neon

### 20A DP Switch (without Flex Outlet)

20A DP Switch20A DP Switch with Neon

3 Pole And 20A DP Switches Are Non-Modular

### Fan Isolation Switch

020 10A 3 Pole Fan Isolation Switch

This Product Is Not Modular

Standards: BS60669

Back Box Depth: 25mm Minimum Cable Size: 20A DP: 4 x 2.5mm<sup>2</sup> 10A 3P: 1 x 2.5mm<sup>2</sup> / 2 x 1.5mm<sup>2</sup>



'Ingot' 20A DP Switch With Flex Outlet | 'Ingot' 20A DP Switch Without Flex Outlet | 'Ingot' Fan Isolation Switch



#### Fan Isolation 'Ingot' Switch

520 10A 3 Pole Fan Isolation 'Ingot' Switch

This Product Is Not Modula

#### 20A DP 'Ingot' Switch with Optional Flex Outlet (11mm Dia.)

522 20A DP 'Ingot' Switch with Flex Outlet

523 20A DP 'Ingot' Switch with Flex Outlet & Neon

### 20A DP 'Ingot' Switch (without Flex Outlet)

722 20A DP 'Ingot' Switch

20A DP 'Ingot' Switch with Neon

3 Pole And 20A DP Switches Are Non-Modular

Standards: BS60669

Back Box Depth: 25mm Minimum Cable Size: 20A DP: 4 x 2.5mm<sup>2</sup> 10A 3P: 1 x 2.5mm<sup>2</sup> / 2 x 1.5mm<sup>2</sup>



45A Switches | Cooker Control Units



### 45A Switches & Socket Outlets

200 1	Gang	45A	DP	Switch
-------	------	-----	----	--------

201 1 Gang 45A DP Switch With Neo	201	1 Gang	45A DP	Switch	With Neo
-----------------------------------	-----	--------	--------	--------	----------

<sup>202</sup> 2 Gang 45A DP Switch

204 45A Cooker Control Unit + 13A DP Switcher
---

<sup>205</sup> 45A Cooker Control Unit + 13A DP Switched Socket & Neons

Standards: BSEN60669, BS4177

Back Box Depth: 35mm Minimum Cable Size: 45A: 1x16mm<sup>2</sup>

'Ingot' 45A Switches | 'Ingot' Cooker Control Units





### 45A 'Ingot' Switches & Socket Outlets

500 'Ingot' 1 Gang 45A DP Switch

501 'Ingot' 1 Gang 45A DP Switch With Neon

502 'Ingot' 2 Gang 45A DP Switch

503 'Ingot' 2 Gang 45A DP Switch With Neon

504 'Ingot' 45A Cooker Control Unit + 13A DP Switched Socket

'Ingot' 45A Cooker Control Unit + 13A DP Switched Socket & Neons

Only available in selected finishes: CH, SC, AB, BN, PN & SS

Standards: BSEN60669, BS4177

Back Box Depth: 35mm Minimum Cable Size: 45A: 1x16mm<sup>2</sup> Dimensions: 1 Gang (88mm x 88mm x 8mm), 2 Gang (146mm x 88mm x 8mm)



### Socket & Blank Plates

20A DP Sink/Bath Switch | Dual Voltage Shaver Socket Outlet | Blank Plates



#### 20A DP Sink/Bath Switch

024 20A DP Sink/Bath Switch

#### **Blank Plates**

060 1 Gang Blank Plate061 2 Gang Blank Plate

#### **Dual Voltage Shaver Socket Outlet**

100 115V/230V Dual Voltage Shaver Socket Outlet CLICK dual voltage shaver outlets incorporate a double wound isolating transformer rated 20Va at 230V or 115V and meets BS EN 61558-2-5: 1998 making it safe for use in bathrooms.

Shaver outlet is not continuously rated and therefore not suitable for use as a permanent charging outlet.

Standards: 024: BSEN60669 100: BSEN61558

**Back Box Depth: 024:** 25mm min **100:** 47mm min. **Cable Size: 024:** 3 x 2.5mm<sup>2</sup> **100:** 2 x 1.5mm<sup>2</sup> / 1 x 2.5mm<sup>2</sup>







# Telephone & Data Sockets RJ11 Outlet | RJ45 Outlets | UK Telephone outlets



#### **RJ11 Data Outlets**

115 Single RJ11 Flush Socket - Ireland/USA

#### **RJ45 Outlets**

117 Single RJ45 Flush Socket Twin RJ45 Flush Socket 118

### **UK Telephone Outlets**

120 Single Telephone Socket - Master Twin Telephone Socket - Master 121 Single Telephone Socket - Secondary 125 Twin Telephone Socket - Secondary 126

Twin outlets are 2 separate sockets and not internally linked together.

Back Box Depth: 16mm Minimum Termination Type: IDC

### Satellite & Coaxial Outlets

deco

Non-Isolated Coaxial Socket | Satellite Socket Outlets | Isolated Coaxial Socket | Signal Outlet Plates



### Satellite Socket Outlets

56 Non-Isolated Single Satellite Socket

157 Isolated Satellite & Isolated Coaxial Socket

170 Non-Isolated Satellite & Non-Isolated Coaxial Socket

Isolated outlets will filter out any interference, if a 2 way signal is required, i.e. for use with satellite hard wire extensions, then a non-isolated outlet is required.

### Non-Isolated Coaxial Socket

O65 Single Non-Isolated Coaxial SocketO66 Twin Non-Isolated Coaxial Socket

### **Isolated Coaxial Socket**

158 Single Isolated Coaxial Socket159 Twin Isolated Coaxial Socket

Back Box Depth: 16mm Minimum



# New Media Unfurnished Single And Twin New Media Plates



### **New Media Plates**

310¹ 1 Gang Plate Single Aperture (Unfurnished)
311 1 Gang Plate Twin Aperture (Unfurnished)
312 2 Gang Plate Quad Aperture (Unfurnished)
MP606⁺ Semi Modular Media Plate (Unfurnished)

\*Available in Chrome (CH), Satin Chrome (SC) and Polar White (PRW)

All plates supplied with black and white gaskets where applicable. †Excludes GCBR Finish Selecting from a range of module inserts covering all manner of media transfer, the installer will now be able to configure their own arrangement of fv, radio or satellite reception, plus speaker, telephone and data outlets. All modules can be inserted into single or double wall plates, filted onto standard switch and socket boxes.

The plate has its own dedicated 47mm deep galvanised steel mounting box (MP525) for flush fitting, featuring segregation walls which is supplied separate to the plate.

### Galvanised Boxes

essentials

Galvanised Steel Boxes | Longer Fixing Screws



### **Longer Fixing Screws**

SP650 50mm Long Screws (bag of 100)SP675 75mm Long Screws (bag of 100)

Screws available in brass (BR), Chrome (CH) and black nickel (BN). Suffix code with preferred finish.

#### Galvanised Steel Boxes

WA093 1 Gang 25mm Deep Galvanised Steel K.O. Box WA094 2 Gang 25mm Deep Galvanised Steel K.O. Box WA095 1 Gang 35mm Deep Galvanised Steel K.O. Box WA096 2 Gang 35mm Deep Galvanised Steel K.O. Box WA097 1 Gang 47mm Deep Galvanised Steel K.O. Box WA370 1+1 Dual Accessory Box - 35mm Deep WA375 1+2 Dual Accessory Box - 35mm Deep WA571 1 Gang Architrave K/O Box - 25mm Deep WA572 2 Gang Architrave K/O Box - 25mm Deep

For the complete range of back boxes see Essentials page k4.

### essentials

### Dry Lining Boxes

Cavity Wall Dry Lining Boxes | 'Ezylink' Dry Lining Box Connector



Cavity wai	i Dry Lining Boxes
WA087P	1 Gang 35mm Deep Dry Lining Box
WA088P	2 Gang 35mm Deep Dry Lining Box
WA106P	1 Gang 47mm Deep Dry Lining Box
WA107P	2 Gang 47mm Deep Dry Lining Box
WA108P	Circular Ceiling Dry Lining Box

### 'Ezylink' Dry Lining Box connector

'Ezylink' Dry Lining Box Connector GA100

For the complete range of back boxes see Essentials page k4.

### neGuard Cavity Wall Dry Lining Boxes

riameGua	rd Cavity wall bry Lining boxes
WA4135	1 Gang 35mm Deep Dry Lining Box
WA4235	2 Gang 35mm Deep Dry Lining Box
WA4147	1 Gang 47mm Dry Lining Box
WA4247	2 Gang 47mm Dry Lining Box

FlameGuard back boxes have been tested and conform to both fire and acoustic BS EN standards. Fire: BS EN 1363-1: 1999 & BS EN 1364-1: 1999 Acoustic: BS EN ISO 140-3: 1995 & BS EN ISO 717-1: 1997. Complies with Building Regulations Fire tested up to 90 minutes with the capability of the boxes being mounted back to back.