


HOW TO ORDER

HT	20	N4	12	ZP
	Connection One	Connection Two	Length	Finish
	20 = M16 x 2.0	20 = M16 x 2.0	12 = 12"	ZP = Zinc Plated
	15 = M16 x 1.5	15 = M16 x 1.5	24 = 24"	S6 = 316 Stainless Steel
	12 = S12.65 x 1.5	12 = S12.65 x 1.5	36 = 36"	
		N4 = 1/4" FNPT	48 = 48"	
		G4 = G1/4 Female	60 = 60"	
			72 = 72"	
			96 = 96"	
			120 = 120"	
			240 = 240"	

Custom hose lengths and other connections sizes and styles available upon request

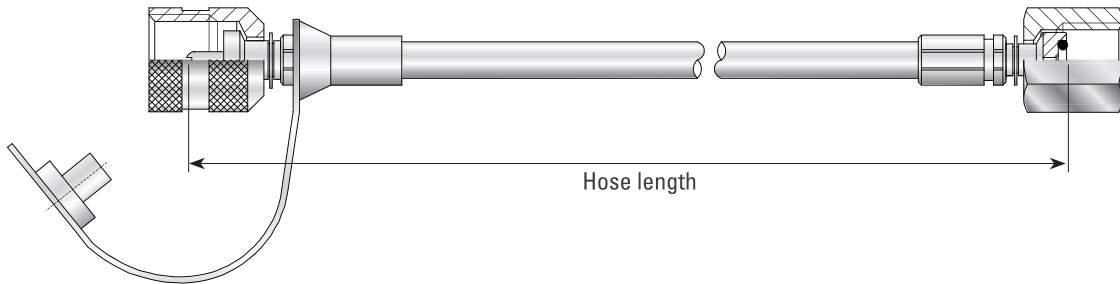

+/- 5mm Tolerance

Outside Diameter	5mm
Inside Diameter	2mm
Max Working Pressure	9137PSI
Min Bursting Pressure	27,412PSI
Min Bending Radius	20mm
Working Temperature	-40 to 212F
Core Material	Thermoplastic Polyester
Braid Material	Aramid Fiber
Cover Material	Anti-abrasion Polyurethane