



Adjustable Barrel Tee with 24° Taper / O-Ring (DKO) Type FI-ELD • Series L / S

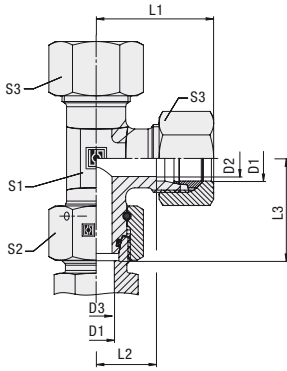

Typical application with a Straight Male Stud Fitting FI-GE-...

Series	Tube OD [mm]	PN [bar]	Dimensions [mm]									Weight [kg] ca. per 100 ²	Ordering Codes	
			D2	L	L1 ¹	L2	L3	S1	S2	S3	Fitting body supplied with cutting rings & union nuts		Fitting body only	
L	6	500	4	19	27	12	26	12	14	14	6,5	FI-ELD-06L-B-W3-DKO-MS	FI-ELD-06L-B-W3-DKO	
	8	500	6	21	29	14	27,5	12	17	17	8,8	FI-ELD-08L-B-W3-DKO-MS	FI-ELD-08L-B-W3-DKO	
	10	500	8	22	30	15	29	14	19	19	11,2	FI-ELD-10L-B-W3-DKO-MS	FI-ELD-10L-B-W3-DKO	
	12	400	10	24	32	17	29,5	17	22	22	15,2	FI-ELD-12L-B-W3-DKO-MS	FI-ELD-12L-B-W3-DKO	
	15	400	12	28	36	21	32,5	19	27	27	24,8	FI-ELD-15L-B-W3-DKO-MS	FI-ELD-15L-B-W3-DKO	
	18	400	15	31	40	23,5	35,5	24	32	32	35,9	FI-ELD-18L-B-W3-DKO-MS	FI-ELD-18L-B-W3-DKO	
	22	400	19	35	44	27,5	38,5	27	36	36	48,3	FI-ELD-22L-B-W3-DKO-MS	FI-ELD-22L-B-W3-DKO	
	28	250	24	38	47	30,5	41,5	36	41	41	81,5	FI-ELD-28L-B-W3-DKO-MS	FI-ELD-28L-B-W3-DKO	
	35	250	30	45	56	34,5	51	41	50	50	111,3	FI-ELD-35L-B-W3-DKO-MS	FI-ELD-35L-B-W3-DKO	
42	250	36	51	63	40	56	50	60	60	149,4	FI-ELD-42L-B-W3-DKO-MS	FI-ELD-42L-B-W3-DKO		
S	6	800	4	23	31	16	27	12	17	17	10,4	FI-ELD-06S-B-W3-DKO-MS	FI-ELD-06S-B-W3-DKO	
	8	800	5	24	32	17	27,5	14	19	19	13,1	FI-ELD-08S-B-W3-DKO-MS	FI-ELD-08S-B-W3-DKO	
	10	800	7	25	34	17,5	30	17	22	22	18,0	FI-ELD-10S-B-W3-DKO-MS	FI-ELD-10S-B-W3-DKO	
	12	630	8	29	38	21,5	31	17	24	24	22,2	FI-ELD-12S-B-W3-DKO-MS	FI-ELD-12S-B-W3-DKO	
	14	630	10	30	40	22	35	19	27	27	30,1	FI-ELD-14S-B-W3-DKO-MS	FI-ELD-14S-B-W3-DKO	
	16	630	12	33	43	24,5	36,5	24	30	30	39,3	FI-ELD-16S-B-W3-DKO-MS	FI-ELD-16S-B-W3-DKO	
	20	400	16	37	48	26,5	44,5	27	36	36	60,5	FI-ELD-20S-B-W3-DKO-MS	FI-ELD-20S-B-W3-DKO	
	25	400	20	42	54	30	50	36	46	46	108,9	FI-ELD-25S-B-W3-DKO-MS	FI-ELD-25S-B-W3-DKO	
	30	400	25	49	62	35,5	55	41	50	50	138,7	FI-ELD-30S-B-W3-DKO-MS	FI-ELD-30S-B-W3-DKO	
38	400	32	57	72	41	63	50	60	60	203,3	FI-ELD-38S-B-W3-DKO-MS	FI-ELD-38S-B-W3-DKO		

¹ Approximate dimension with nut tightened.

² Weight including cutting ring and union nut.

Standard seal material is NBR (Buna-N®).



Please make sure to follow the assembly instructions for this product as described on page G13.