



1515 DIGITAL LOCK **KEYPAD** ACCESS CONTROL



- RESIDENTIAL • GATED COMMUNITIES • APARTMENT COMPLEXES
- PARKING • CONDOMINIUM/RESIDENT HALL • MIXED USE
- COMMERCIAL • SELF STORAGE • MAXIMUM SECURITY



- Programming via the keypad or from a DoorKing Android Digital Lock Manager app using Near Field Communication (NFC)
- Smart Open application allows users to activate their entry code from their Android smartphone
- 400 memory capacity for momentary entry or hold open entry codes
- Apps free from the Google Play Store
- Low power mode for solar applications
- 2 year limited factory warranty




smart open app
hold phone in front of unit



keypad users
enter 4-5 digit unique PIN to gain entry




lighted keys
for easy night time operation

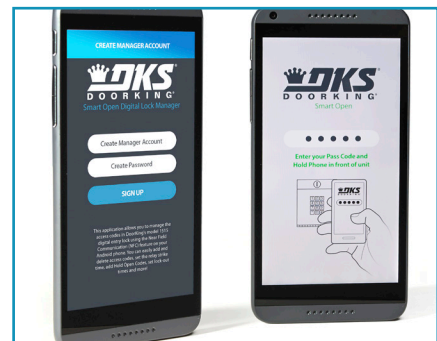

android smartphone
for manager programming and user entry

1515 DIGITAL LOCK ACCESS CONTROL KEYPAD

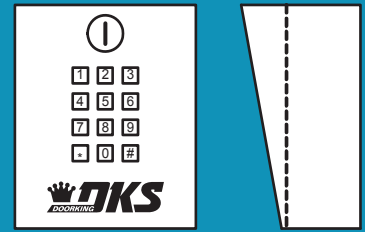

1515 Surface
4.5" W x 5.375" H x 3.6875" D
114.3mm W x 136.5mm H x 93.6mm D

1515	MAX CODES	ENTRY CODE DIGITS	LOCKOUT MODE	HOLD OPEN CAPABILITY	OUTPUT	MAX ACCESS PTS	POWER	LOW POWER MODE
Digital Lock	400	4 or 5 digit entry codes	Lockout Tries (3-9) Lockout Time (1-9 minutes)	Yes	1 Relay	1	12-24 VAC or VDC	Less than 1 ma for solar applications

Technical Features

Mechanical

Basic digital entry for economical applications

Ideal for doors or gates

400 memory capacity for momentary entry or hold open entry codes or any combination thereof

Lighted keypad (in low power mode, keypad lights up at the first touch of a button and remains lighted until 5 seconds after the relay activates)

Low power mode for solar applications. Less than 1ma current in low power mode

Selectable 4 or 5 digit codes

Door open time settable from 1/4 second to 99 seconds

Wrong entry code lockout settable from 3-9 tries and 1-9 minutes

Programming via the keypad or from the DoorKing Android Digital Lock Manager app using Near Field Communication (NFC)

DoorKing Smart Open app for users to activate the entry codes using their Android NFC smartpone. Free from the Google Play Store



Electrical

12 to 24 volt AC or DC power

Form C dry contact relay

30 V 1 amp maximum

Request to Exit input

Miscellaneous

Environmental: -10°F to 115°F (-23°C to 46°C)

Shipping weight approximately 8-20 Lbs (3.6-9 kg)

Mounting: Surface / post mount



Access Control Solutions since 1948

Distributed by:

MEMBER:



DOOR KING, INC.

120 Glasgow Avenue, Inglewood, California 90301 U.S.A.

Tel: 310-645-0023 FAX: 310-641-1586 www.doorking.com

© 2014 All Rights Reserved. Product specifications may change without notice.
Rev. 12/14