



ULTIMO™

AUTOMATIC SLIDING DOOR SENSOR
WITH EXTENDED / ENHANCED SAFETY



LEARN MORE



Click or scan

TECHNOLOGY



CERTIFICATIONS




DESCRIPTION

BEA's **ULTIMO™** is a dual technology sensor with flexible safety features for automatic sliding doors. The microwave motion field activates as people or objects approach the door. Meanwhile, three adjustable infrared curtains, each with up to 32 spots of detection, ensure the safety of pedestrians passing through the door opening.

ULTIMO offers advanced presence detection using ULTI-SHIELD technology, which provides uniform sensitivity across the safety curtains. ULTI-SHIELD technology allows for extended or enhanced infrared curtain positioning, ensures no loss of detection and immunities to environmental disturbances.

Installers can easily adjust **ULTIMO's** microwave and infrared fields via a menu-driven LCD screen, reducing manual adjustments for efficient installation and service maintenance. Five infrared curtain width settings provide the flexibility needed to cover narrow to wide door packages. Additionally, ULTI-SYNC technology automatically synchronizes the infrared curtains between sensors ensuring seamless retrofit installations.

The combination of flexible and precise detection fields complements the door's performance – making **ULTIMO** ideal for high-traffic environments in hospitals, hotels, airports or retail facilities.

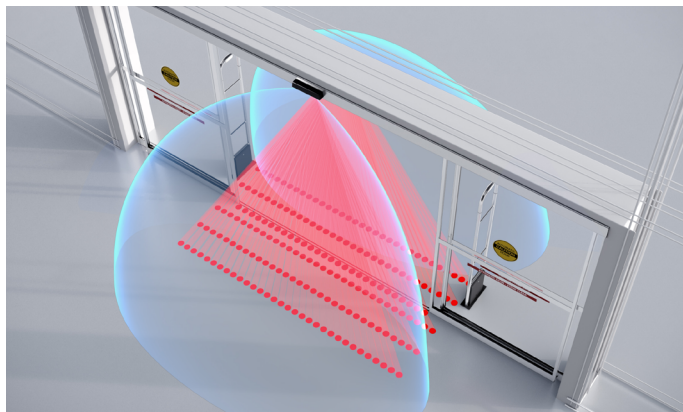

Extended Safety

- Three infrared curtains offer deeper & broader safety coverage in front of the door panels

Enhanced Safety

- Positioning the innermost infrared safety curtain through the threshold allows for sustained presence detection in the door opening
- When the innermost infrared safety curtain is directed through the threshold, it provides adaptive presence detection as the door closes

Easy Installation

- Eight visible red alignment spots are projected onto the ground, verifying the location of the infrared curtains and helping to increase the accuracy of setup
- Sensors automatically sync infrared frequency with ULTI-SYNC functionality, streamlining installation and retrofit applications*

Convenient Programming


- Easily define the microwave pattern shape, adjust the infrared curtain width and review troubleshooting diagnostics via a menu-driven LCD

Standards Compliant


- Fully monitored internally, capable of external monitoring complying with ANSI 156.10

* ULTI-SYNC is cross-compatible with BEA & other sliding door sensors on the market.


APPLICATIONS




Single Slide
showing Enhanced Safety curtain position



Dual Slide - Wide Door Package
showing Enhanced Safety curtain position



Dual Slide - Standard Door Package
showing Extended Safety curtain position




Cleanroom
showing Enhanced Safety curtain position

TECHNICAL SPECIFICATIONS

Mounting Height	6'6" – 11'6"
Detection Mode	Motion and Presence
Technology	Microwave Doppler Radar and Active Infrared (AIR) with Background Analysis
Radar Detection Speed (min)	2 in / s
AIR Response Time (typ.)	< 200 ms (max. 500 ms)
Radar Transmitter	
Frequency	24.150 GHz
Radiated Power	< 20 dBm EIRP
Power Density	< 5 mW / cm ²
Lobe Angles	0 – 45° (typical adjustment), default 25°
AIR Spots	
Size	2" x 2" (typ.)
Number of Spots	max. 32 per curtain
Number of Curtains	3
Curtain Angles	-3 – 11°, default 0°
Relay Output 1	Electro-mechanical-relay (potential and polarity free)
Max. Contact Voltage	30 VDC
Max. Contact Current	1 A
Hold Time	0.5 – 9 s
Optofet Output 2	Solid-state-relay (potential and polarity free)
Max. Contact Voltage	42 VAC / VDC
Max. Contact Current	400 mA
Hold Time	0.3 – 1 s
Test / Monitoring Input	
Sensitivity	Low: < 1 V; High: > 10 V (max. 30 V)
Response Time on Request	Typical: < 5 ms
Supply Voltage	12 – 24 VAC ±10% 12 – 30 VDC ±10%
Power Consumption	< 3.2 W
Temperature Range*	-13 – 131 °F 0 – 95% relative humidity, non-condensing
Cable Length / Gauge	10' / 26 AWG
Degree of Protection	IP54
Norm Conformity	R&TTE 1999 / 5 / EC; MD 2006 / 42 / EC; LVD 2006 / 95 / EC; ROHS 2 2011 / 65 / EU

*LCD screen is operational from 14 – 131 °F. The sensor may still be programmed in colder temperatures, but with the remote control.

PRODUCT SERIES

 <p>10ULTIMO Dual Technology Sensor</p>	 <p>10.1351 Replacement Cover</p>	 <p>20.5349 Replacement Harness</p>
 <p>10ULTIMOSPACER Spacer Accessory for ULTIMO</p>	 <p>10URA Rain Accessory for ULTIMO</p>	 <p>10UMB Mounting Bracket Accessory for ULTIMO</p>
 <p>10RETROFITSPACER Retrofit Spacer Kit - includes spacer, 2.5" harness, and 9" harness</p>	 <p>10REMOTE BEA Universal Remote Control</p>	

DISCLAIMER Information is supplied upon the condition that the persons receiving it will make their own determination as to its suitability for their purposes prior to use. In no event will BEA be responsible for damages of any nature whatsoever resulting from the use of or reliance upon information from this document or the products to which the information refers. BEA has the right without liability to change descriptions and specifications at any time.

WWW.BEASENSORS.COM



BEA AMERICAS / RIDC Park West / 100 Enterprise Drive / Pittsburgh, PA
T 1-800-523-2462 / F 1-888-523-2462 / E info-us@BEAsensors.com

A Halma company