


HSLG OPERATOR INSTALLATION GUIDE

POST MOUNTING INSTRUCTIONS FOR MODEL HSLG

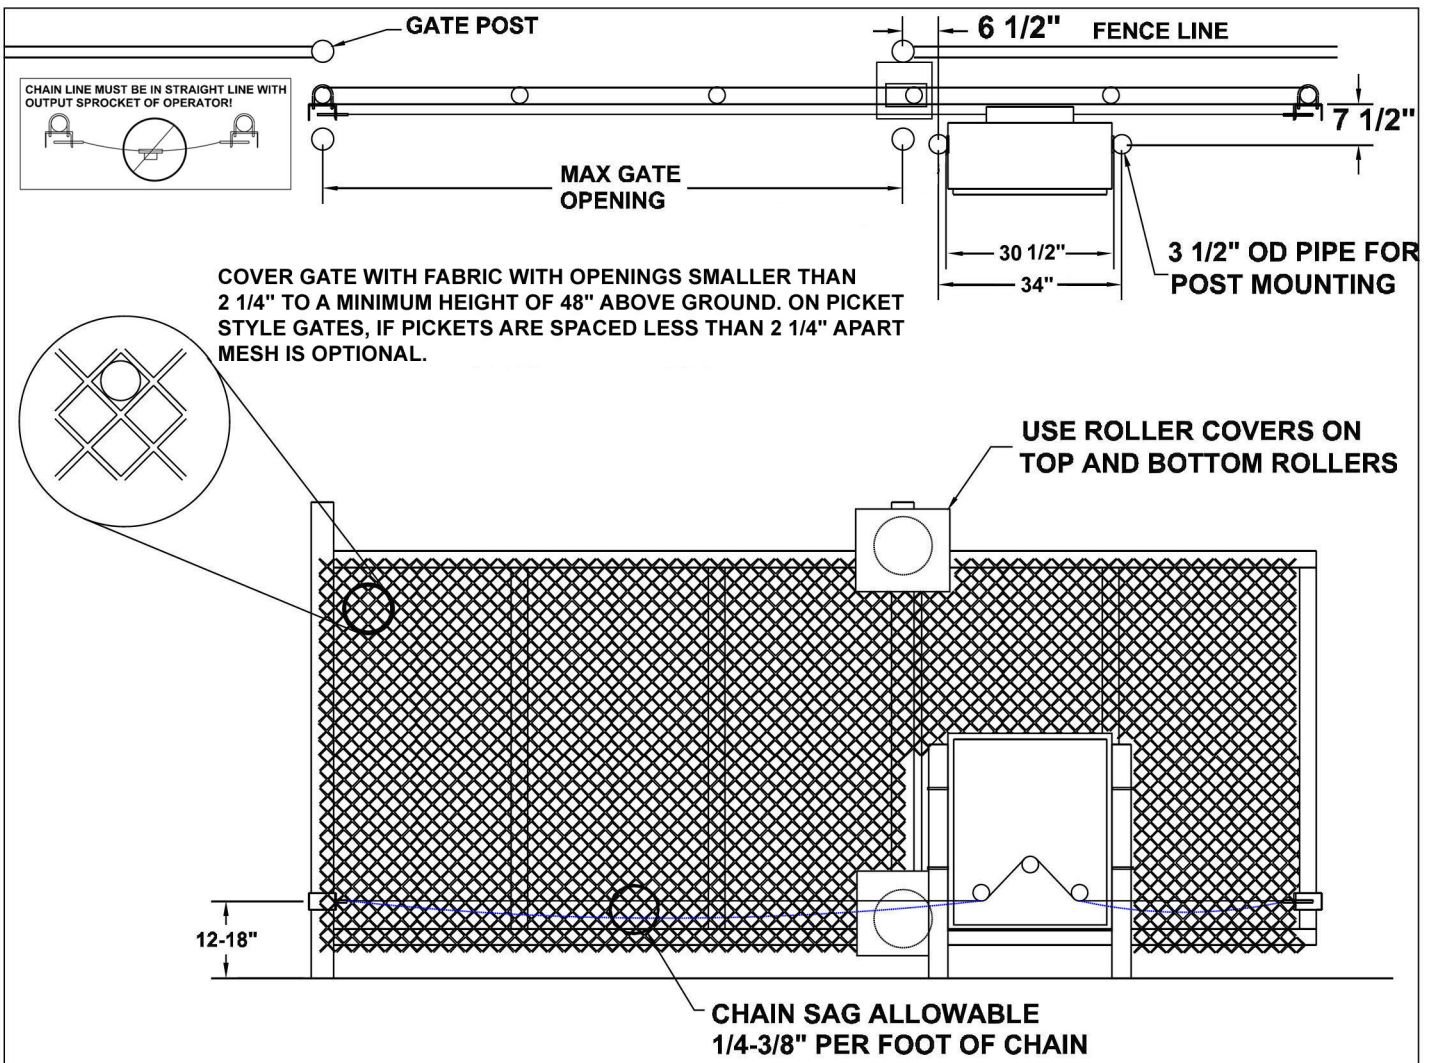

Before installing, make sure the gate rolls or slides freely, and that all exposed rollers are properly covered. The gate must be covered with fabric with openings no larger than 2 1/4" in size, to a minimum height of 48 inches from ground level. On picket-style gates, if pickets are spaced less than 2 1/4" apart, mesh is optional.

Use two 3 - 3 1/2" OD galvanized posts and secure with concrete footings as shown, length to be determined by local codes, frost line depth and soil conditions. Secure the operator to the posts using the 4" U-bolts, side plates, and hardware. There are a total of eight side plates. There are six 3/16" side plates which should be mounted on the outside top and bottom of the cabinet, two 3/16" side plates which go on the top inside and two 1/2" side plates which should be mounted on the inside top of the cabinet as shown in the illustration at the right.

To assemble the drive chain and gate brackets, refer to page 6. Make sure that the chain sag does not exceed recommended sizes and that the chain does not come into contact with the moving parts of the gate or ground.

For optional pad mounting instructions, see OSCO drawing #2700-360.

A SEPARATE PEDESTRIAN GATE IS REQUIRED FOR ALL PEDESTRIAN TRAFFIC. THIS GATE MUST BE A MINIMUM DISTANCE OF 7 FEET FROM THE VEHICULAR GATE AND GATE OPERATOR

