




HSLG

Model

HSLG COMMERCIAL/ INDUSTRIAL

- Integral APeX Controller
- Double V-belt to chain reduction
- #40 roller drive chain
- 1/2, 3/4, or 1 HP motor
- All voltages, single or three-phase
- Powder coat finish
- Post mount standard; pad mount optional

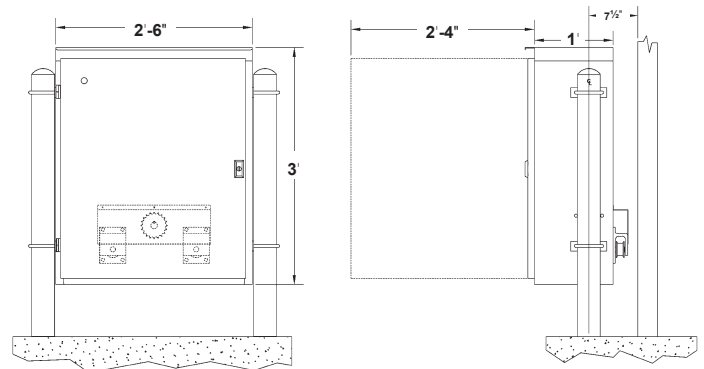

HSLG SERIES SLIDE GATE OPERATOR SPECIFICATIONS

	Model	HP	Voltage Single-Phase (Voltage Three-Phase)	Maximum Gate Length	Maximum Gate Weight	Gate Speed	Shipping Weight
HSLG	HSLG-2	1/2	115 / 230 VAC (208 / 230 / 460 VAC)	35'	1000 lbs	10" / second	280 lbs
	HSLG-4	3/4	115 / 230 VAC (208 / 230 / 460 VAC)	45'	1200 lbs	10" / second	285 lbs
	HSLG-1	1	115 / 230 VAC (208 / 230 / 460 VAC)	55'	1700 lbs	10" / second	290 lbs

HSLG Features

Electrical

- Solid state 24V control board UL325/UL991 compliant
- Diagnostic LED display for ease of setup and trouble shooting
- Integral entrapment sensing system with digital set point for accurate adjustment and enhanced safety
- Integrated maximum run and auto close timers
- Built-in dual gate capability using 3-wire shielded cable
- 24V DC power available for access control accessories
- Continuous-tone entrapment alarm with reset button
- Integrated warning beeper during gate movement

- Selectable pre-start alarm with provision for ADA compliant visual pre-start and run alarm
- Solenoid disc brake

Mechanical

- Heavy duty steel chassis
- Easy-to-operate emergency manual disconnect handle
- #40 roller chain and sprockets
- Efficient double V-belt drive
- Heavy duty pillow-block bearings
- Adjustable torque limiter

1 APeX Controls

- UL325/UL991 compliant 24VDC control module
- Full featured for access control, security, and entrapment protection
- Integral MegaCode receiver
- On-board 3-button station

2 Belt and Chain Reduction

- Rugged and efficient double, 4L V-belt to chain reduction

3 Manual Disconnect

- Secure, easy, manual operation during power failure or emergency
- Optional remote cable kit for outside-the-gate access

4 Heavy Duty Components

- Adjustable torque limiter and heavy-duty pillow block bearings for smooth, reliable, quiet power transmission
- All models rated for continuous duty

5 Weather-Resistant Cabinet

- Galvannealed steel cabinet with powder coat finish
- Lockable, gasketed, hinged, and removable front cover

6 Standard Convenience Features

- Exterior stop/reset button
- Power on/off button



CAUTION

- Automatic gates not for pedestrians
- Automatic gate operators designed for vehicular traffic only; operators are powerful and can cause serious injury or death; DIRECT ALL PEDESTRIAN TRAFFIC TO SEPARATE PEDESTRIAN GATE
- UL325 requires use of contact or non-contact anti-entrapment devices
- ASTM F2200 requires that all exposed rollers are covered

LINEAR™
a Nice brand

linear-solutions.com

Linear® Garage Door Operators, Gate Operators, Access Controls and Radio Controls

Backed by 60 years of pioneering experience in wireless technology, garage door and gate operator manufacturing, and access control systems, the full breadth of the Linear® brand is a leading source for the garage door, gate, and access industries.

Nice

Niceforyou.com

©2023 Nice North America LLC. Linear is a registered trademark of Nice North America LLC. All rights reserved. All other products or name brands are trademark of their respective holders.

223143 Rev-F 02/2023