

WiFi Video Intercom

RANGE

Access Control

Video Intercom WiFi/LAN

WIFI-BFT-KPAD II

WIFI-KPAD-II-E

BFTWIFIKPADIIIEF
(Vertical Flush Mount)



Surface Mount Model
BFT-WIFIKPAD-EII

WIFI-BFT-KPAD II

WiFi VIDEO

- Speak to and see visitors from your smartphone or tablet.
- Easy wireless connection to existing home wifi.
- Long range directional patch antenna at gate (up to 30-150 yards dependent on router and environmental conditions)
- Call up to 4 devices at the same time.
- Get a video call from your gate / door even when you're away
- No SIM card, no call charges (data charges may apply when phone is not connected to wifi).
- No home phone line needed.
- Less susceptible to lightning strikes - no wire in the ground

- NEW** Hold open button on the App.
- NEW** Now includes 2 relay outputs on the App.
- NEW** Full duplex speech.
- NEW** Upgraded camera, with IR cut filter for true color by day and IR night vision.

Simple setup by mobile phone. Connect to the system video directly through your phone's or tablet's wifi, enter the pass code for the home hub wifi and your devices are connected.

View the gate/door any time with monitoring mode!

Open gates with your phone or tablet.

Built in RJ45 Ethernet socket for CAT5 cabled installs.

Can work with most open market Ethernet-Over-Mains adapters for longer range applications or professional Wi-Fi magnifiers.


Search WIFI PRO 2




WiFi Video Intercom

PHYSICAL MEASUREMENTS

WIFI-BFT-KPADII

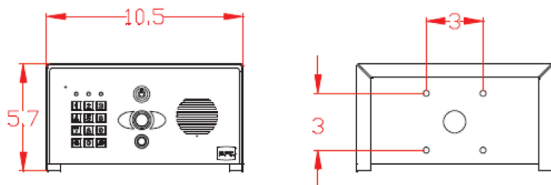

WIFIKPAD-II-E (SURFACE MOUNT PANEL)

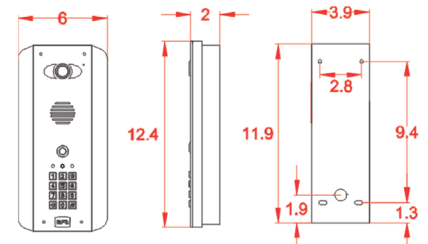

Technical Details

WIFI-BFT-KPADII
WIFIKPAD-E-II

Power Supply	24v dc (adaptor included)
Current Consumption	80mA standby, 300mA calling
Relay Outputs	2
Relay Type	N/O & N/C contacts
Relay Time	Adjustable 1-10 secs
Relay Load	2A 24v AC max
IP Rating	IP55
Camera	Color, 110 degrees, 640x480 pixel
Night Vision	Yes, by infrared illumination (now with IR cut filter)

App Name	WIFI PRO 2
Audio	Full 2-way Duplex and half Duplex sound options
Keypad Option	Yes
Keypad Relays	3
Keypad Codes	1200
Wi-Fi Standard	802.11b/g/n
Security	6-digit passcode protected
Uplink Bandwidth	110K bits/sec
Optional Add-On: WIFI-TOUCH	<ul style="list-style-type: none"> ▪Wall mount touch screen monitor (1280x800 Resolution), ▪10.1 Inch screen IPS LCD Android screen with RJ-45 interface USB port. ▪WiFi connectable. ▪12VDC or POE. ▪Complete with both wall mount bracket and desk stand.



Be ahead