

NO.	03	05	23	27	37															
Quantity Confirm NO.	N	10	6	2	N	Frame	7. If you have a h clear plastic clips.	6. To lock the frames together you can us they are designed tight so they lock well.	5. You ca stand, lift	4. Its time to get your hands cleaned as nor the printed fabric. Feed the fabric from the frame, feed only a few feet, then stand the the fabric to the bottom, now close the Zipper.	3. Now start pushing th difficult you can slightly spring pop up on place.	2. Make	Setup Instructions 1. Take all the parts out of the bags according to the assembly diagram.							
Confirm							have a he stic clips.	< the fram designed	in set up t the fabri	e to get y ed fabric. ed only a the botto	tart push ⁄ou can sl ɔp up on	sure that	O Inst II the part g to the a							
NO.	35	90°	(R2)				eader in	nes toge tight so	the feet c panels	our han Feed th few fee m, now	ing the ightly tv place.	all the c	Instructions the parts out of the barts to the assembly diagr				ł			
Quantit	6	6		N	_	Frame	the kit y	ther you they loc	in the po s and fit c	nds cleane ne fabric f t, then sta close the	pipes tog vist the p	orrespon	ONS f the bags y diagram				Ş		<i>*</i>	
Quantity Confirm						Φ	ou can fix	can use tl k well.	5. You can set up the feet in the position that stand, lift the fabric panels and fit on the feet.	ed as now rom the r and the fr Zipper.	ether unt arts toge	Make sure that all the corresponding numbers are correct.	s and lay t 1.			DESTINATIO			DESTINATION PASS	
	clear 25	00	34	16			to the	he "S" s	it you w t.	you ar ound ei ame up	il they ther to	nbers ar	hem or		The second se	N PASSPORT - A Travel		or A lavel Age	PORT - A T	
Quantity Confirm	4	N	-	2		Frame	If you have a header in the kit you can fix to the top by using the ear plastic clips.	To lock the frames together you can use the "S" shaped brackets, ey are designed tight so they lock well.	You can set up the feet in the position that you want to erect the and, lift the fabric panels and fit on the feet.	4. Its time to get your hands cleaned as now you are ready to handle the printed fabric. Feed the fabric from the round edges of the frame, feed only a few feet, then stand the frame up then slide the fabric to the bottom, now close the Zipper.	3. Now start pushing the pipes together until they firmly click, if difficult you can slightly twist the parts together to make the locking spring pop up on place.	e correct.	Setup Instructions <ol> <li>Take all the parts out of the bags and lay them on the ground according to the assembly diagram.</li> </ol>			Quantum Contraction of the second secon		3		
Confirm							ng the	ckets,	ct the	handle e e the	, if ocking		nd							
NO.																				
Quantity																V				
antity Confirm						-														
NO.																				
Quantity															 65					NFB-4
Quantity Confirm						-														8-4
NO.							-							6						
Quantit															 					
Quantity Confirm						_													6	
m NO.												<b>A</b>				<u> </u>				
						_			2259mm(88,9")						6					
Confirm								20000	3,9″)		, u –	Л								

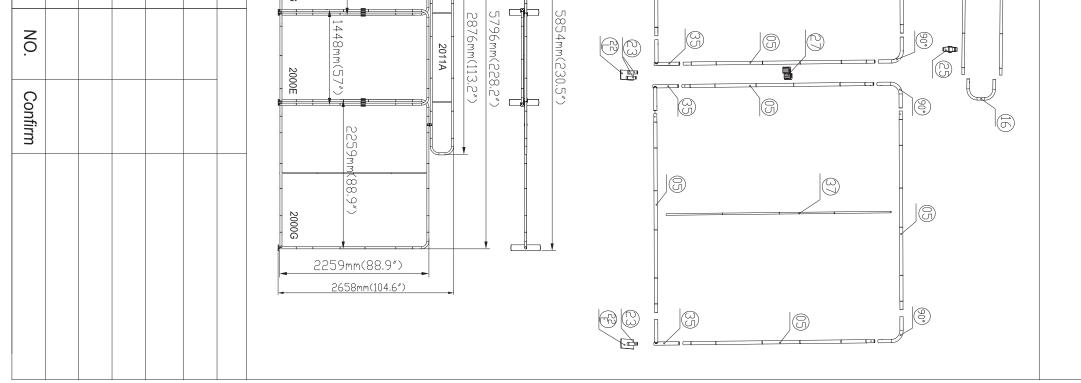


## MONITOR STAND 36" x 89"

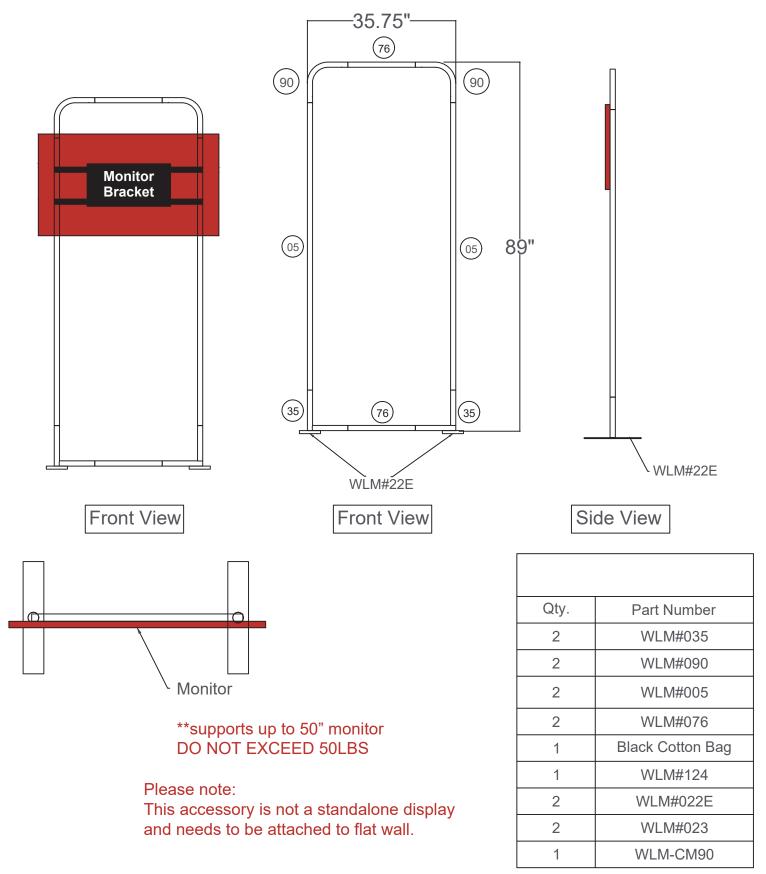

\*\*monitor not included

## MONITOR BRACKET

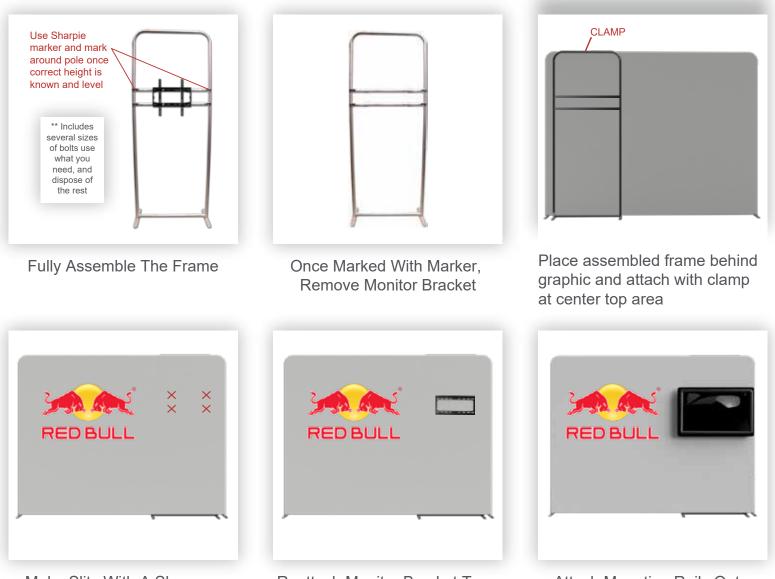

Make Slits With A Sharp Knife Where The Bolts Should Penetrate Graphic

Reattach Monitor Bracket To Front Of Graphics And Tighten

Attach Mounting Rails Onto Back Of Monitor

Hang Monitor Back Onto Support Bars

\*\*supports up to 50" monitor (not included)

DO NOT EXCEED 50LBS

## **Case to Counter Setup Instructions**



1. Hardcase with wheels and handle



5. Secure all 4 poles



2. Release fasteners



6. Cover the black skirt or graphic on the bottom



3. Get all parts out



4. Screw the poles into the case



7. Connect the top and poles



8. Place top on poles



9. Pull the black skirt or graphic up 10. Place countertop on display



