
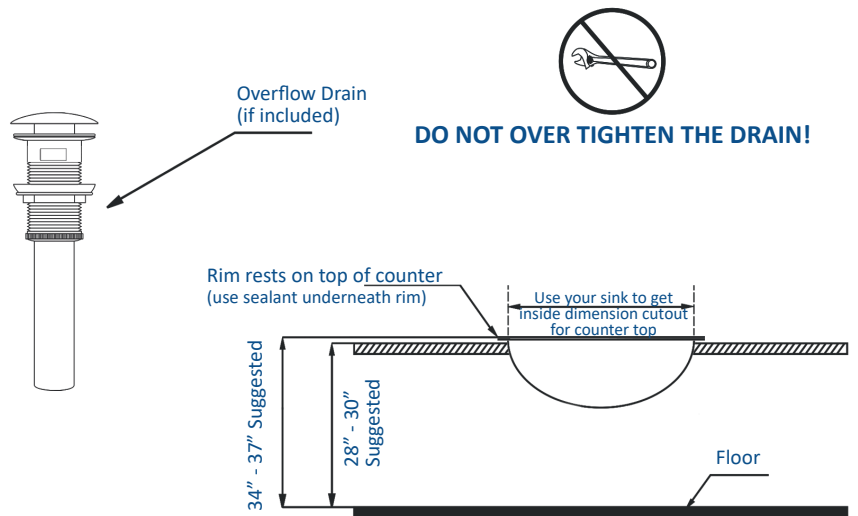


DROP-IN ASSEMBLY

Steps to Complete Your Drop-in Sink Project

- Measure *inside edge* of lip and mark the countertop accordingly
- **Cutout of the counter** should be ½ - 1.5-inches inside than the diameter of the sink
- **Before applying silicone**, drop the sink into the counter to ensure a nice fit.
- **Apply silicone** around cut-out on counter top, and place sink in cut-out.
- **Use a level** to ensure the sink is level in every direction.
- **Carefully** remove any excess silicone
- **Install the drain** according to specs when the sink has fully set.
- **When cleaning** do not use abrasive cleaners.

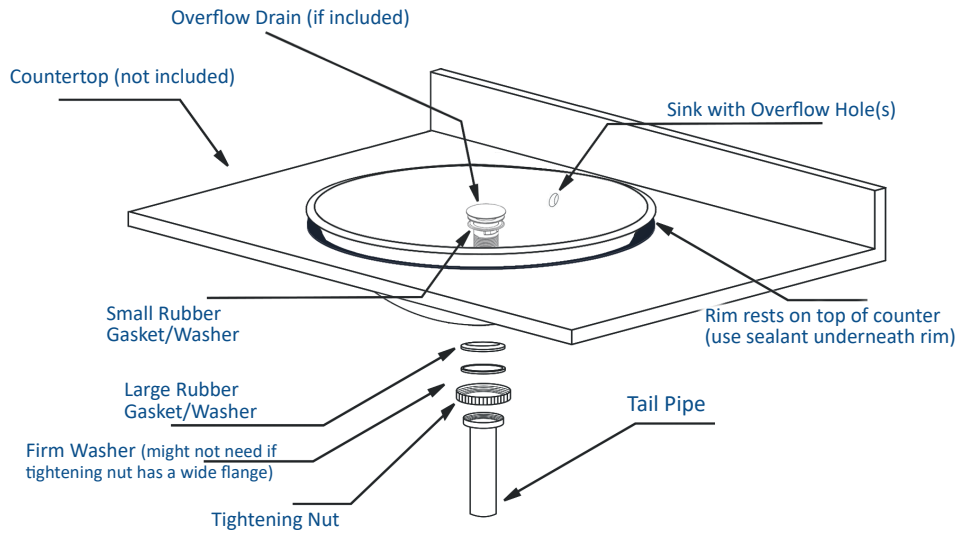

PLEASE NOTE - DROP-IN SINKS:

- Review and abide by all building and plumbing codes.
- Have a licensed professional install your Novatto sink.
- Evaluate current or desired cabinetry. If you are building or remodeling the area from scratch, you will be able to choose cabinets specifically made for drop-in sinks.
- Some counters require different cutting methods; seek the details of your chosen countertop material.
- Novatto recommends consulting an experienced cabinet maker for assistance and providing them with the actual sink to ensure a custom fit. There is no template.
- Be careful when unpacking the sink, we advise setting it on the packing it was received with.
- Do not use standard plumbers putty or oil-based sealers. These products will stain the porcelain. Please use 100% silicone gel (non-water based) or a stain-free putty, on the inside of the sink to seal the drain.
- Check to make sure the sink is sealed watertight.
- Use non-abrasive cleaners when cleaning up.
- Allow adequate room for faucet and back-splash when laying out the sink