


ITEM # ENVULVFOG



**Strong injection and ultra-low volume spraying function ensures the penetration and diffusion to fine areas**

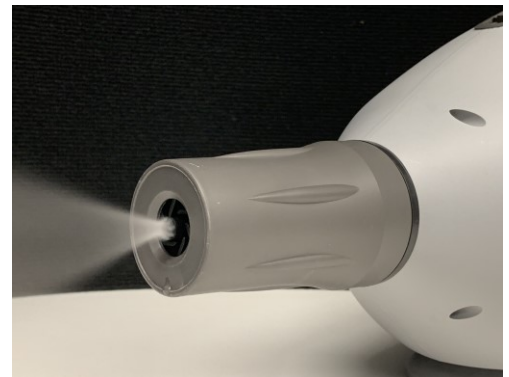

The **EnviroNize® ULV Fogger** has a wide array of applications, making it one of the most versatile and powerful **ULV Foggers** on the market.

**Disinfection | Sterilization:** The **EnviroNize® ULV Fogger** enables injection of **EnviroNize Anolyte 50 ULV | Dry Mist FOG Sanitizer** solution to every area of its targeted disinfection. Its small micron droplet nozzle that is adjustable provides for complete coverage and protection against infectious pathogens.

**Application | Spray:** The **EnviroNize® ULV Fogger** is to be only used with **EnviroNize Anolyte 50 ULV | Dry Mist FOG Sanitizer**. The **EnviroNize® ULV Fogger** has a unique “open | close” valve providing ultimate spraying. The “Solution Flow” can easily be adjusted from releasing maximum solution when fully open to a reduced smaller micro flow when only slightly open. The **EnviroNize® ULV Fogger** can also be utilized as a “**blow dryer**” when the “open | close” is valve fully closed. In this setting the **EnviroNize® ULV Fogger** provides quick and immediate blow drying to areas such as electrical components and metals where applied solution should not be exposed to long periods of time.

**FAST  
EFFICIENT**



Designed for *Larger*

**Surface**

*Area Coverage*

- ✓ Switch(On/Off) function
- ✓ Control of solution amount
- ✓ Includes Two Tanks: EnviroNize Anolyte Tank | Flush Tank
- ✓ One-touch exchange of solution tank
- ✓ Powerful Blower allows fast air drying as well as administering solution
- ✓ Adjustable 5-10 Micron droplet size
- ✓ CSA Approved 110V and 220V
- ✓ 3 liter solution reservoir
- ✓ Spray reach 5-10 meters
- ✓ Long supply cord to allow for maximum coverage

# FEATURES

*Ajustable*

SETTINGS



## IDEAL Setting

1. Adjust Spray Fog using “Adjustable Settings” Valve
2. **Fine Fog (RECOMMENDED)**- - Fully Close Valve then open 1.5 turns to maximum of 2 full turns
3. Apply **EnviroNize Anolyte 50 ULV | Dry Mist FOG Sanitizer** 3 meters or 10 feet from target area with one pass to apply light non wet mist application
4. Thoroughly **BLOW DRY** fogged area within 1 minute so target area is dry and free of any moisture should mist come in contact with any electrical component or non stainless steel metals

## Wet! Setting

1. Adjust Spray Fog using “Adjustable Settings” Valve
2. Wet Fog (Non-Metal, Non-Electrical and Non-Painted Porous Surfaces) - Fully Close Valve then open 2.5 turns to a maximum of 3 full turns
3. Apply **EnviroNize Anolyte 50 ULV | Dry Mist FOG Sanitizer** (Non-Metal, Non-Electrical and Non-Painted Porous Surfaces) 2 meters or 6 feet from target area. Let air dry



1. Adjust Spray Fog using “Adjustable Settings” Valve
2. **BLOW DRY FEATURE:** To be used when fogging near and on any metal, electrical components or high-tech lighting:
3. Fully Close Valve (No Solution) - Turn **EnviroNize® ULV Fogger** to maximum on position to provide just air **NO SOLUTION** - Thoroughly **BLOW DRY** fogged area within 1 minute so target area is dry and free of any moisture
4. Apply **BLOW DRY FEATURE** 1 meter or 3 feet from target area

# CARE | USE

TWO Tanks

Anolyte

Flush



1. Fill the **Anolyte Tank** with **EnviroNize Anolyte 50 ULV | Dry Mist FOG Sanitizer**
2. Adjust the settings using the “Adjustable Settings” valve to desired setting
3. Apply **EnviroNize Anolyte 50 ULV | Dry Mist FOG Sanitizer** within recommended distance for each setting
4. **AFTER USE (Immediately)** Remove “**ANOLYTE TANK**” and replace with the “**FLUSH TANK**”
5. Follow Flushing Instructions noted on the “**FLUSH TANK**”
6. **STORAGE** (Non-use for periods of 3 days or longer): Empty **EnviroNize Anolyte 50 ULV | Dry Mist FOG Sanitizer** into original **EnviroNize Anolyte 50 ULV | Dry Mist FOG Sanitizer** container and rinse out the “**ANOLYTE TANK**” using warm water



1. To eliminate any small particle build up in the spray orifice of the **EnviroNize® ULV Fogger** **AFTER USE (Immediately)** remove the “**ANOLYTE TANK**” and replace with the “**FLUSH TANK**”
2. Prepare “**FLUSH TANK**” Solution: USING HOT WATER
3. Fill “**FLUSH TANK**” with “HOT WATER”
4. **Flushing Directions:** Using “WET SETTING” mode, run **EnviroNize® ULV Fogger** using the “**FLUSH TANK**” solution for 30 seconds in an open space to clear any granules which may lodge in the spray orifices of the **EnviroNize® ULV Fogger**

**EnviroNize Anolyte 50 ULV | Dry Mist FOG Sanitizer**

**DO NOT USE** any other solution other than **EnviroNize Anolyte 50 ULV | Dry Mist FOG Sanitizer** with the **EnviroNize® ULV Fogger!**

