

AMALFI "A" Modular electric oven for pizzeria

COMPOSITION WITH 1 BAKING CHAMBER



OPTIONS AND ACCESSORIES (WITH SURCHARGE)

- Leavening prover on wheels, height 800mm
- Support with wheels, height 600mm
- □ Support with wheels, height 800mm
- □ Support with wheels, height 950mm
- Additional tray holder guides for compartment and support
- □ Spacer element height 300mm
- Suction hood

(WITHOUT SURCHARGE)

□ Front vapour collection hood in stainless steel sheet

EXTERNAL CONSTRUCTION

- □ Structure made in folded stainless steel
- Gilde panels in pre-painted sheet metal
- □ Stainless steel hood with aluminised steel top cover
- Front vapour collection hood in enameled steel sheet
- □ Steam duct in stainless steel plate
- □ Stainless steel door with bottom hinge and spring balance
- Tempered glass element
- Handles in thermoplastic material
- Control panel on front right hand side

INTERNAL CONSTRUCTION

- Refractory brick cooking surface
- Refractory top and side structure
- Rock wool heat insulation

FUNCTIONING

- □ Heated by spiral heating elements
- □ Electronic temperature management with independent adjustment of ceiling and floor
- □ Maximum temperatura reached 450℃
- Continuous temperature monitoring with thermocouple
- □ Vapour ducting using manual butterfly valve

STANDARD EQUIPMENT

- Lighting with halogen lamp
- Timer
- Economiser
- Independent maximum temperature safety device
- 20 customisable programs




MORETTI FORNI S.P.A.

www.morettiforni.com marketing@morettiforni.com Via A.Meucci, 4 - 61037 Mondolfo (PU) ITALIA Tel. +39.0721.96161 - Fax +39.0721.9616299 7/13



AMALFI "A" 1 baking chamber height 18cm

(assembled with support height 950mm)

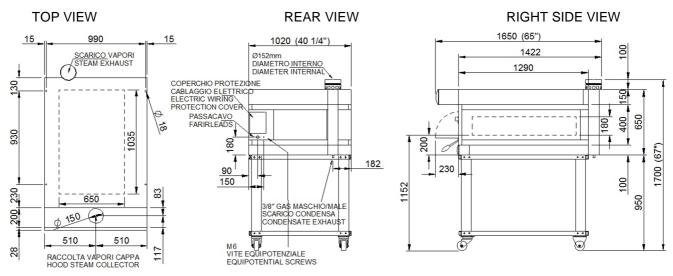

Nota: The dimensions indicated in the views are in millimetres.

Conn.

3x1,5mm²

Cable

type

50/60Hz

7,1kW

3.6kWh

1,5kW

0,8kWh

H07RN-F

SPECIFICATIONS

The appliance comprises one cooking element and an optional leavening compartment or support. The oven cooking surface is made of refractory, allowing pefect heat distribution over the whole surface and making this oven particularly suitable for use by pizza cooks. Temperature adjustment is electronic, with independent control of the ceiling and floor heating elements. The oven door is hinged at the bottom, with a tempered glass window to check the state of the product while it is cooking. The support comprises a painted metal structure, whereas the leavening compartment has a stainless steel structure and is fitted with a heating thermostat. The leavening compartment can reach a maximum temperature of 65°C, whereas the maximum temperature of the baking chamber is 450°C

All the data provided below refer to the configuration with 1 baking chamber

DIMENSIONS SHIPPING INFORMATION FEEDING AND POWER External height 750mm Packed in wooden crate Standard feeding 900mm A.C. V400 3N External depth 1651mm Height 1851mm Feeding on request External width 1020mm Depth Weiaht Width 1220mm A.C. V230 3 222kg $0.7m^{2}$ Weight (222+50)kg Frequency Baking surface Max power **TOTAL BAKING CAPACITY** When combined with leavening Average power cons compartment or support: Connecting cable 2 Max height Tray (600x400)mm 1850mm type H07RN-F 5x4mm² (V400 3N) 4x6mm² (V230 3) Max weight (305+60)kg Pizza diameter 300mm 6 Power supply (optional prover) 2 Pizza diameter 450mm A.C. V230 1N 50/60 Hz Max power Average power cons

* This value is subject to variation according to the way in which the equipment is used

- NOTE: MORETTI FORNI S.P.A. reserves the right to modify the characteristics of the products illustrated in this publication without prior notice