
ASSEMBLY INSTRUCTION G2143KD-SLATTED CHAIR WITH WOODEN SEAT - KD


Page 1 of 2


	OZ 143KD-SEATTED CHAIK WITH WOODEN SEAT - KD								
No	Name of Hardware	Q.ty							
1	Bolts M6 x 70	8	A - Back Frame: x 1	B - Seat Frame x 1	C - Side Stretcher x 2	D - Middle Stretcher	E - Front leg x 2 (le	oft right)	
2	Bolts M8 x 35	2	STEP 1: Please don't tighten bolts		(Left-right)	(5)	L - Florit leg X 2 (le		
3	Spring Washer Ø9/Ø11 @	10		15 2	3) \ 	
4	Washer Ø9/Ø18x 1	10	B—		4 -> (\$\frac{1}{2}\)		3		
5	Allen key (K4)	1							
6	Round head Screws Ø4 x 50	4						,	
7	Round head Screws Ø4 x 30	2	(A)						
Screwdriver (not included)			STEP 2: Please don't tighten bolts and screws fully in this step.						
					5				

STEP 3: Check all legs are in the same level, as shown,

then tighten all bolts and screws fully.

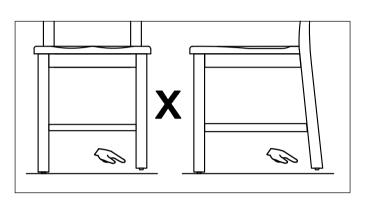



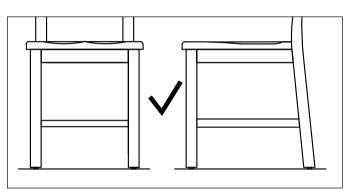

FINAL

