
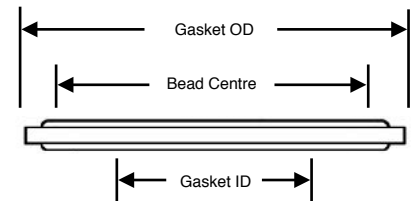




[Click Here for Brochure](#)

Smart Gaskets® value is proven when validating sterility in a high-purity pharmaceutical system. Each seal requires a specifically designed thermocouple clamp but easily installs in between any ASME BPE or standard tri-clamp.

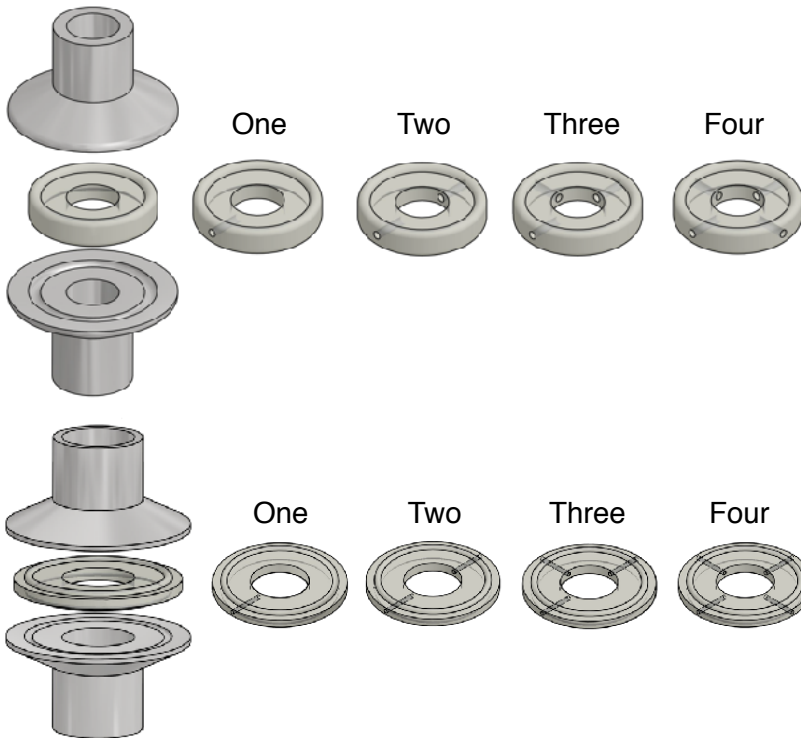

### FKM Smart Gasket®

Size	0.5" to 4"
Temp Range	- 34°C to 204°C
Applications	Process Validation, Thermal Mapping & In-line Sampling
Material	FKM
Pack Size	Individual or Multiples
Colours	Black (Standard)
Options	Laser Engraving

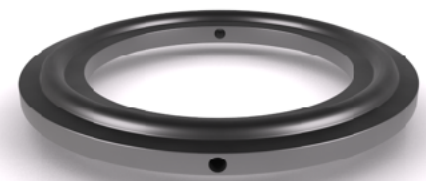

Certificates Available

FDA



ADI

USP VI

### Available Sizes

Part Number	Size	Port	Gasket O.D.	Gasket I.D.	Bead
G-TH-050-V-1	0.5"	1	0.86"	0.38"	NA
G-TH-050-V-2	0.5"	2	0.86"	0.38"	NA
G-TH-050-V-3	0.5"	3	0.86"	0.38"	NA
G-TH-050-V-4	0.5"	4	0.86"	0.38"	NA
G-TH-075-V-1	0.75"	1	0.86"	0.62"	NA
G-TH-075-V-2	0.75"	2	0.86"	0.62"	NA
G-TH-075-V-3	0.75"	3	0.86"	0.62"	NA
G-TH-075-V-4	0.75"	4	0.86"	0.62"	NA
G-TH-100-V-1	1"	1	1.984"	0.9"	1.718"
G-TH-100-V-2	1"	2	1.984"	0.9"	1.718"
G-TH-100-V-3	1"	3	1.984"	0.9"	1.718"
G-TH-100-V-4	1"	4	1.984"	0.9"	1.718"
G-TH-150-V-1	1.5"	1	1.984"	1.4"	1.718"
G-TH-150-V-2	1.5"	2	1.984"	1.4"	1.718"
G-TH-150-V-3	1.5"	3	1.984"	1.4"	1.718"
G-TH-150-V-4	1.5"	4	1.984"	1.4"	1.718"
G-TH-200-V-1	2"	1	2.515"	1.9"	2.218"
G-TH-200-V-2	2"	2	2.515"	1.9"	2.218"
G-TH-200-V-3	2"	3	2.515"	1.9"	2.218"
G-TH-200-V-4	2"	4	2.515"	1.9"	2.218"
G-TH-250-V-1	2.5"	1	3.05"	2.4"	2.781"
G-TH-250-V-2	2.5"	2	3.05"	2.4"	2.781"
G-TH-250-V-3	2.5"	3	3.05"	2.4"	2.781"
G-TH-250-V-4	2.5"	4	3.05"	2.4"	2.781"
G-TH-300-V-1	3"	1	3.579"	2.9"	3.281"
G-TH-300-V-2	3"	2	3.579"	2.9"	3.281"
G-TH-300-V-3	3"	3	3.579"	2.9"	3.281"
G-TH-300-V-4	3"	4	3.579"	2.9"	3.281"
G-TH-400-V-1	4"	1	4.682"	3.869"	4.344"
G-TH-400-V-2	4"	2	4.682"	3.869"	4.344"
G-TH-400-V-3	4"	3	4.682"	3.869"	4.344"
G-TH-400-V-4	4"	4	4.682"	3.869"	4.344"

