

Leviosa Motor Shades


Application of Fabric for 4.5" Leviosa Valance

To avoid wrinkles/waves during shipping, the fabric for the valance is pre-assembled, and is easily finished at installation site.

NOTE: Handle the valance in the VERTICAL position to avoid flexing the valance, which can stretch the fabric and cause waves

- No special tools needed.
- Time required is a few minutes per valance

Carry/lift/install this way to avoid flexing.

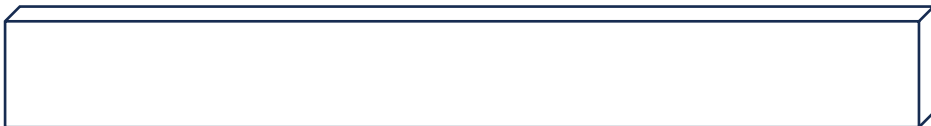

OK !

Avoid handling flat – the valance can flex, causing fabric waves




AVOID !

STEPS

- Ensure your hands are clean so the fabric stays clean.
- Place the valance on a flat surface. A table or counter works best so the Valance Bottom edge hangs over the table edge.
- The valance is pre-assembled with the fabric pre-attached to the Top front edge, and 2-way tape already applied to all edges.
- Pull away and discard the yellow/red liner to expose the tape. The liner pulls away – the tape stays attached to the valance.
- Press fabric down firmly with your fingers to the Front lower edge. Press fabric from the Top front edge to the Lower front edge. Any waves will press outward toward the Bottom.
- Finally, press down the fabric on the Bottom edge.
- Slide your fingers along the corner of the Lower front and Bottom edges to secure the fabric.
- When finished, lift the valance VERTICALLY to install so the valance does not flex, which will cause fabric waves.
- NOTE: If fabric waves do occur, the fabric can be carefully pulled off the Bottom edge and Lower front edge, and re-attached, following these instructions from the beginning. Press fabric from the Top front edge to the Lower front edge to work out the waves.

Pre-assembled Valance

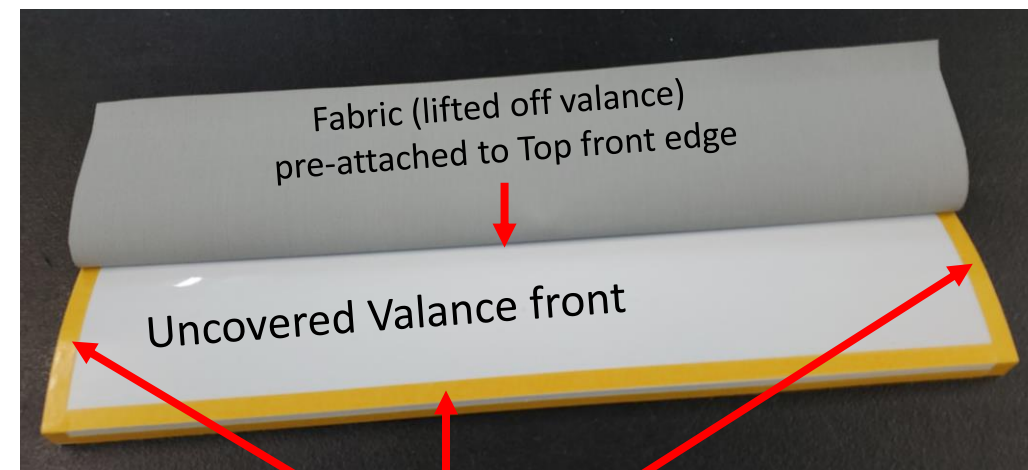

Liner on top of 2-way tape

Finished, Covered Valance

