



**Features**

- 5mm low Iron Copper free mirror glass with safety film backing
- Solid Acrylic diffused Backlit LED lighting
- Anti-fog function
- Touch switch
- Portrait or Landscape mounting
- Energy efficient LED lighting:

SKU	Kevin	CRI/Ra	Lumens*	R9 Value*
BAT.VAM.DIF.20.40.GL.GLA	3000-6500K	90+	2155	50+
BAT.VAM.DIF.24.40.GL.GLA	3000-6500K	90+	2300	50+
BAT.VAM.DIF.32.40.GL.GLA	3000-6500K	90+	2600	50+
BAT.VAM.DIF.36.40.GL.GLA	3000-6500K	90+	2760	50+
BAT.VAM.DIF.40.40.GL.GLA	3000-6500K	90+	2900	50+
BAT.VAM.DIF.48.40.GL.GLA	3000-6500K	90+	3250	50+
BAT.VAM.DIF.60.40.GL.GLA	3000-6500K	90+	3660	50+
BAT.VAM.DIF.72.40.GL.GLA	3000-6500K	90+	4150	50+
BAT.VAM.DIF.80.40.GL.GLA	3000-6500K	90+	4460	50+
BAT.VAM.DIF.90.40.GL.GLA	3000-6500K	90+	4890	50+



**Construction**

- Anodized Alu frame at the back
- Soft Ambient lighting

**Codes/Standards Applicable**


- Electric Option Models are ETL certified to:
- UL 962
  - CSA Standard C22.2 No. 68

**Dimensions**


SKU	Width	Height	Depth	Defogger size
BAT.VAM.DIF.20.40.GL.GLA	20"	40"	1.2"	12"x18"
BAT.VAM.DIF.24.40.GL.GLA	24"	40"	1.2"	12"x18"
BAT.VAM.DIF.32.40.GL.GLA	32"	40"	1.2"	12"x18"
BAT.VAM.DIF.36.40.GL.GLA	36"	40"	1.2"	12"x18"
BAT.VAM.DIF.40.40.GL.GLA	40"	40"	1.2"	12"x18"
BAT.VAM.DIF.48.40.GL.GLA	48"	40"	1.2"	12"x18" x 2PCS
BAT.VAM.DIF.60.40.GL.GLA	60"	40"	1.2"	12"x18" x 2PCS
BAT.VAM.DIF.72.40.GL.GLA	72"	40"	1.2"	12"x18" x 2PCS
BAT.VAM.DIF.80.40.GL.GLA	80"	40"	1.2"	12"x18" x 2PCS
BAT.VAM.DIF.90.40.GL.GLA	90"	40"	1.2"	12"x18" x 2PCS

BAT.VAM.DIF.20.40.GL.GLA


BAT.VAM.DIF.24.40.GL.GLA

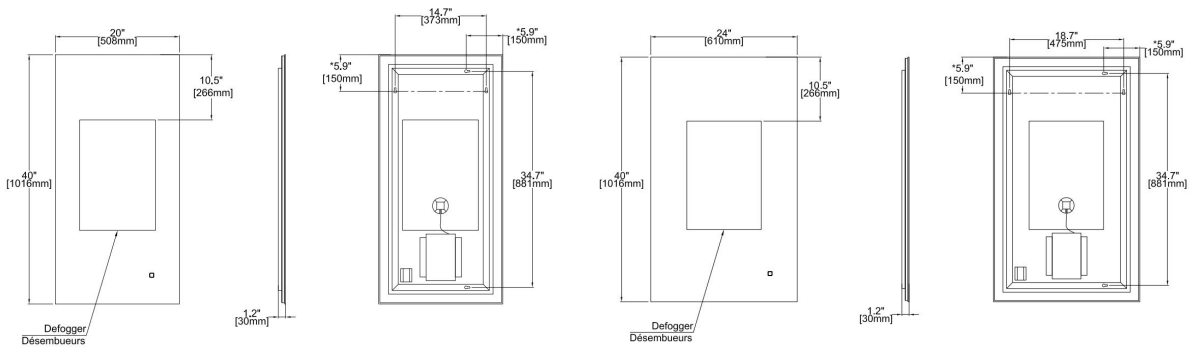


BAT.VAM.DIF.32.40.GL.GLA

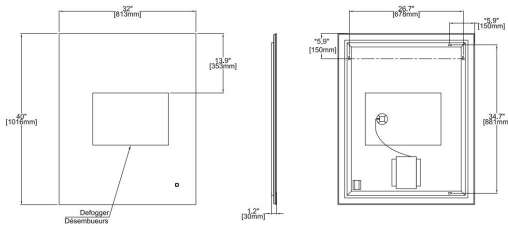


BAT.VAM.DIF.36.40.GL.GLA

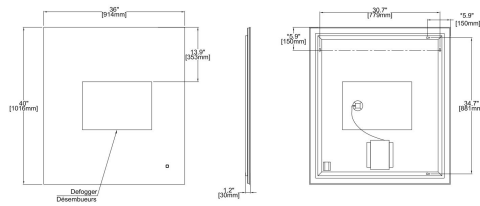


BAT.VAM.DIF.40.40.GL.GLA

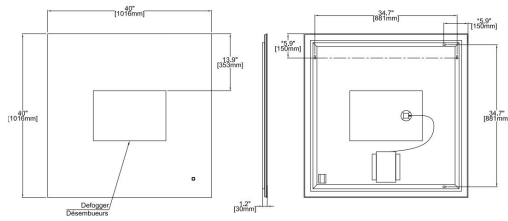


BAT.VAM.DIF.48.40.GL.GLA

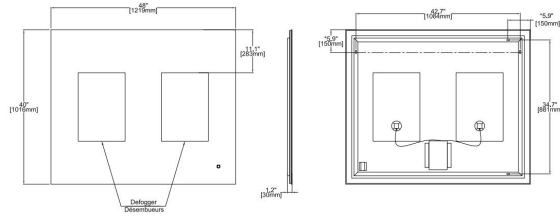

BAT.VAM.DIF.60.40.GL.GLA

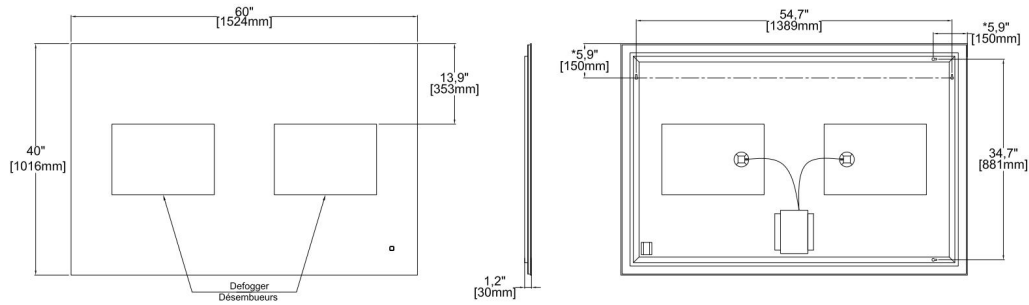

BAT.VAM.DIF.72.40.GL.GLA

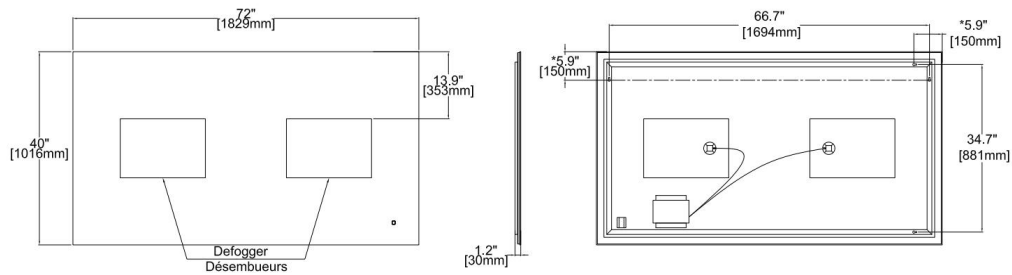

BAT.VAM.DIF.80.40.GL.GLA

