




# bathonomy

## Features

- Mirrored interior with 3 adjustable glass shelves
- USB charging port and 120VAC outlet receptacle
- IR sensor switch
- Energy efficient LED lighting:

	BAT.VAM.MCF.24.40.GL.GLA	BAT.VAM.MCF.32.40.GL.GLA	BAT.VAM.MCF.60.40.GL.GLA	BAT.VAM.MCF.72.40.GL.GLA	BAT.VAM.MCF.80.40.GL.GLA
Kelvin	2700-6500	2700-6500	2700-6500	2700-6500	2700-6500
CRI	90+	90+	90+	90+	90+
Lumens**	2016	2268	3150	3528	3780
R9 Value*	50+	50+	50+	50+	50+

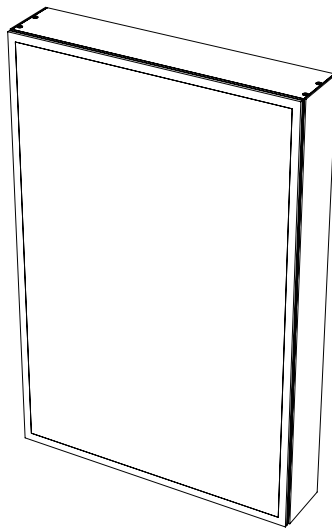

## Construction

- Satin anodized aluminum body
- 3 mirror design - rear of cabinet and both sides of door
- 125° soft closing hinge
- Adjustable shelving

## Codes/Standards Applicable

Electric Option Models are ETL certified to:

- UL 962
- CSA Standard C22.2 No. 68

## Dimensions





BAT.VAM.MCF.24.40.GL.GLA  
 Height: 39-3/8" (1000 mm)  
 Width: 23-5/8" (600 mm)  
 Depth: 5-1/4" (132 mm)


BAT.VAM.MCF.32.40.GL.GLA  
 Height: 39-3/8" (1000 mm)  
 Width: 31-1/2" (800 mm)  
 Depth: 5-1/4" (132 mm)

BAT.VAM.MCF.60.40.GL.GLA  
 Height: 39-3/8" (1000 mm)  
 Width: 59" (1500 mm)  
 Depth: 5-1/4" (132 mm)


BAT.VAM.MCF.72.40.GL.GLA  
 Height: 39-3/8" (1000 mm)  
 Width: 70-7/8" (1800 mm)  
 Depth: 5-1/4" (132 mm)

BAT.VAM.MCF.80.40.GL.GLA  
 Height: 39-3/8" (1000 mm)  
 Width: 78-3/4" (2000 mm)  
 Depth: 5-1/4" (132 mm)

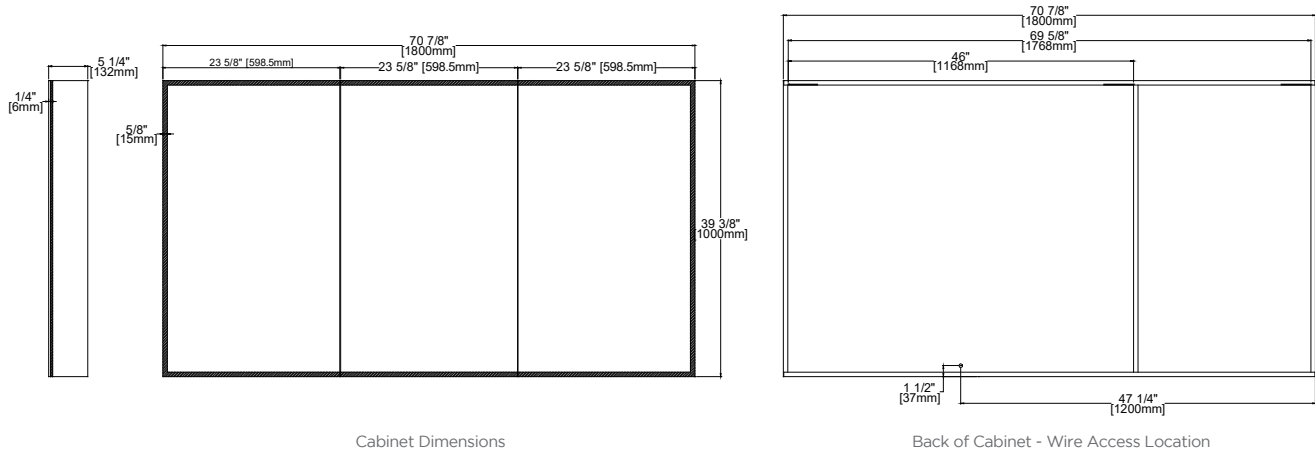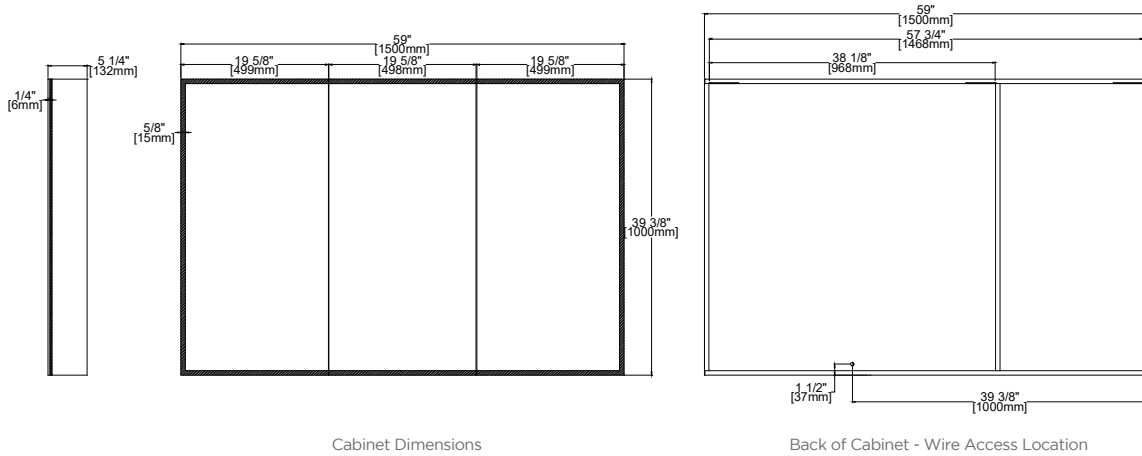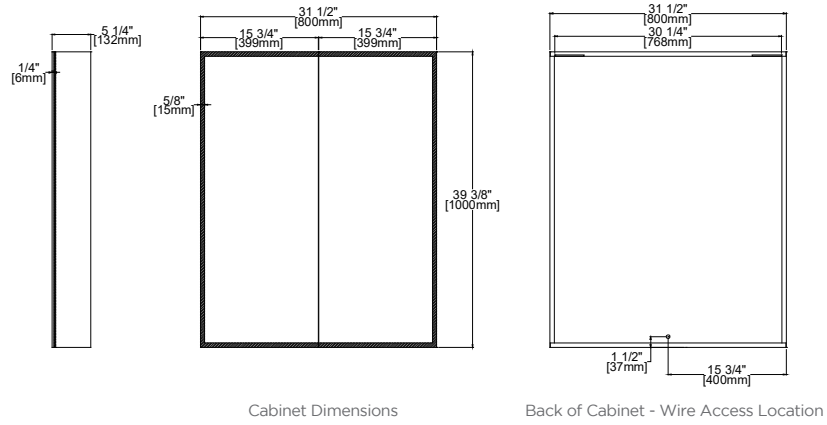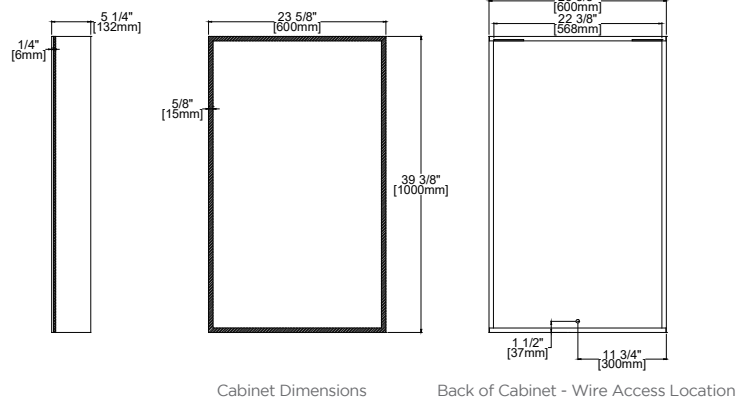

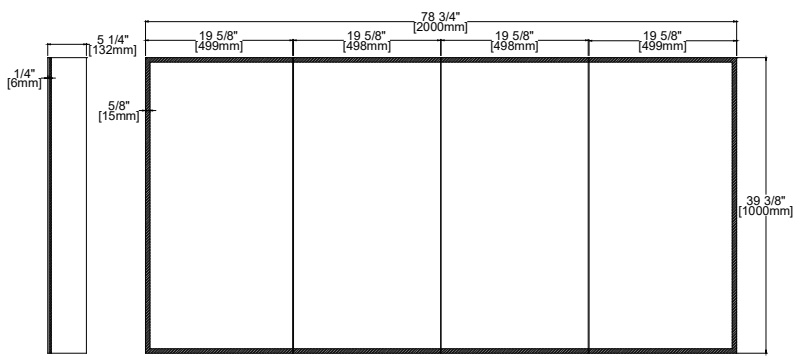

Cabinet Dimensions

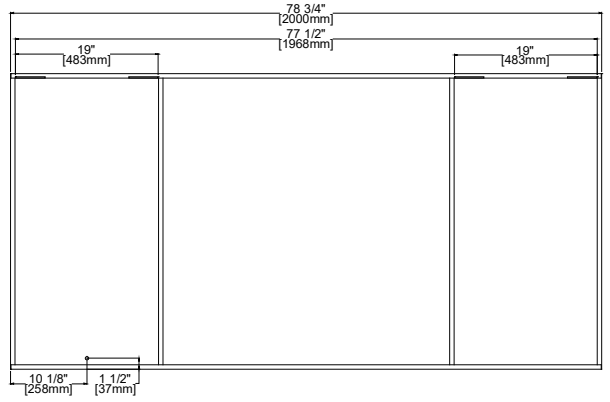

Back of Cabinet - Wire Access Location