




Features

- 5mm low Iron Copper free mirror glass with safety film backing
- Solid Acrylic diffused LED lighting
- Anti-fog function
- Rocker on/off Switch
- Portrait or Landscape mounting
- Energy efficient LED lighting:

SKU	Kevin	CRI/Ra	Lumens*	R9 Value*
BAT.VAM.MIL.20.40.GL.GLA	3500K	90+	2295	50+
BAT.VAM.MIL.24.40.GL.GLA	3500K	90+	2450	50+
BAT.VAM.MIL.32.40.GL.GLA	3500K	90+	2770	50+
BAT.VAM.MIL.36.40.GL.GLA	3500K	90+	2930	50+
BAT.VAM.MIL.40.40.GL.GLA	3500K	90+	3090	50+
BAT.VAM.MIL.48.40.GL.GLA	3500K	90+	3400	50+
BAT.VAM.MIL.60.40.GL.GLA	3500K	90+	3880	50+
BAT.VAM.MIL.72.40.GL.GLA	3500K	90+	4350	50+
BAT.VAM.MIL.80.40.GL.GLA	3500K	90+	4670	50+
BAT.VAM.MIL.90.40.GL.GLA	3500K	90+	5100	50+
	3500K	90+		50+



Construction

- Anodized Alu frame at the back
- Front task light and ambient lighting

Codes/Standards Applicable



- Electric Option Models are ETL certified to:
- UL 962
 - CSA Standard C22.2 No. 68

Dimensions


SKU	Width	Height	Depth	Defogger size
BAT.VAM.MIL.20.40.GL.GLA	20"	40"	1.7"	12"x18"
BAT.VAM.MIL.24.40.GL.GLA	24"	40"	1.7"	12"x18"
BAT.VAM.MIL.32.40.GL.GLA	32"	40"	1.7"	12"x18"
BAT.VAM.MIL.36.40.GL.GLA	36"	40"	1.7"	12"x18"
BAT.VAM.MIL.40.40.GL.GLA	40"	40"	1.7"	12"x18"
BAT.VAM.MIL.48.40.GL.GLA	48"	40"	1.7"	12"x18" x 2PCS
BAT.VAM.MIL.60.40.GL.GLA	60"	40"	1.7"	12"x18" x 2PCS
BAT.VAM.MIL.72.40.GL.GLA	72"	40"	1.7"	12"x18" x 2PCS
BAT.VAM.MIL.80.40.GL.GLA	80"	40"	1.7"	12"x18" x 2PCS
BAT.VAM.MIL.90.40.GL.GLA	90"	40"	1.7"	12"x18" x 2PCS

BAT.VAM.MIL.20.40.GL.GLA


BAT.VAM.MIL.24.40.GL.GLA

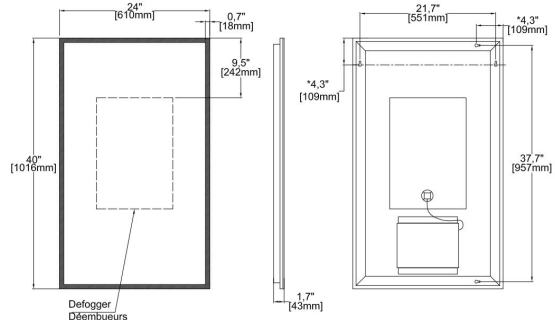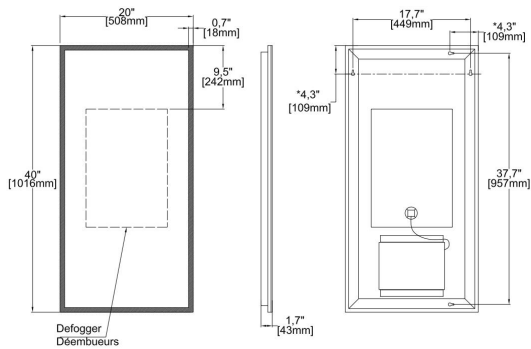


BAT.VAM.MIL.32.40.GL.GLA

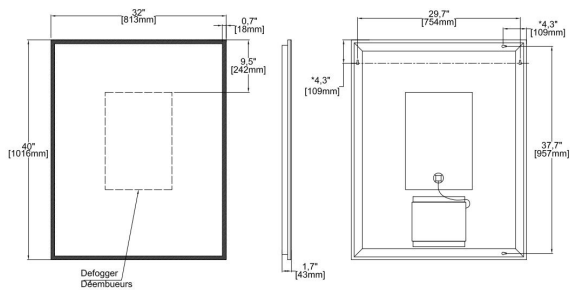


BAT.VAM.MIL.36.40.GL.GLA

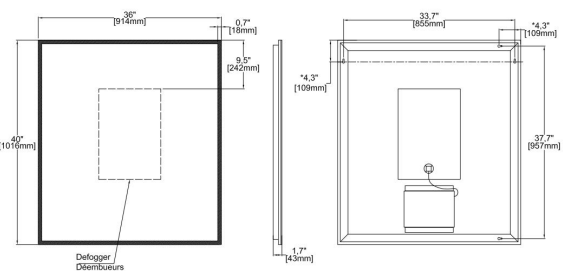


BAT.VAM.MIL.40.40.GL.GLA

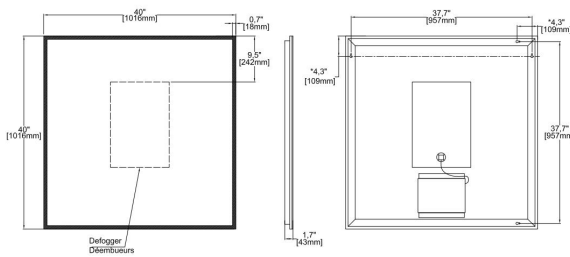


BAT.VAM.MIL.48.40.GL.GLA

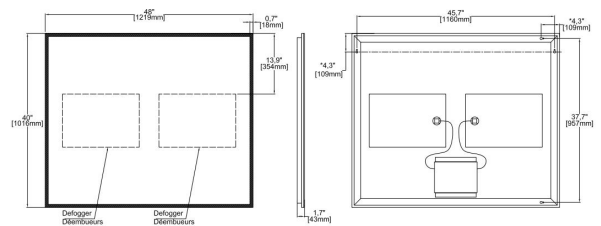

BAT.VAM.MIL.60.40.GL.GLA

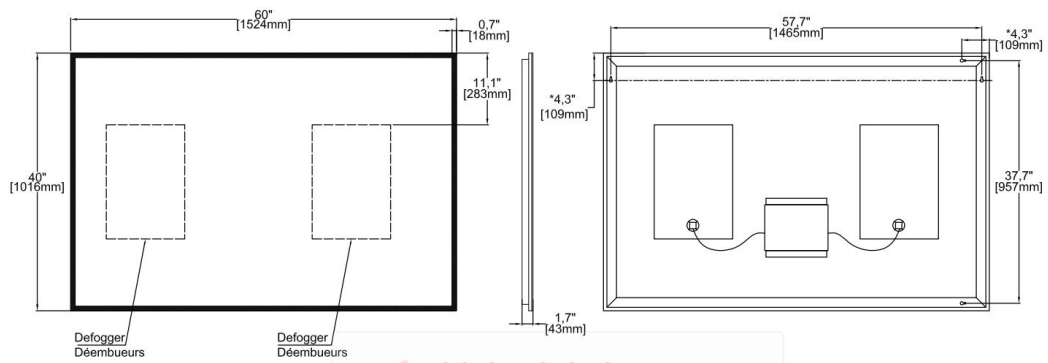

BAT.VAM.MIL.72.40.GL.GLA

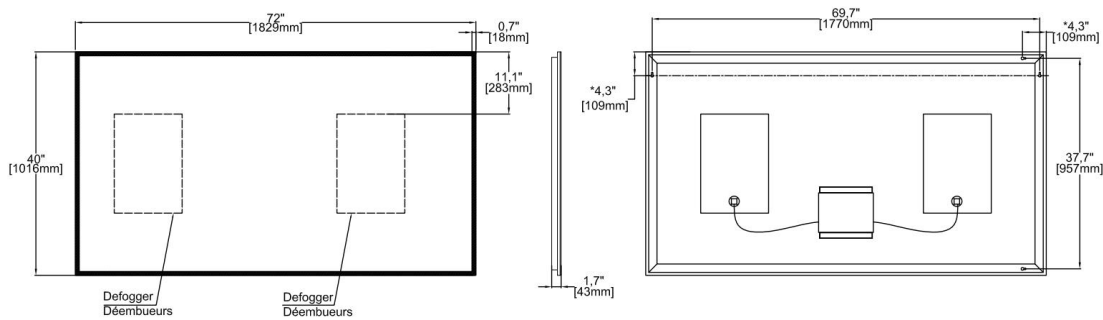

BAT.VAM.MIL.80.40.GL.GLA

