# **KOHLER**<sub>®</sub>

#### Features

- Center drain.
- Slotted overflow for deep soaking.
- Integral lumbar support.
- 72" (1829 mm) x 36" (914 mm) x 23" (584 mm)

#### Material

Acrylic

#### Installation

Drop-in or under-mount.

#### **Required Accessories**

K-7271 Brass Slotted Overflow Bath Drain or

K-7272 PVC Slotted Overflow Bath Drain

#### **Recommended Accessories**

K-593 Under-Mount Installation Kit K-1491 Bath/Whirlpool Pillow K-1601 Bath/Whirlpool Footstop K-24916 Wireless Music Kit K-1177 Vinyl Tiling-in Bead



#### **Codes/Standards**

CSA B45.5/IAPMO Z124 ASTM E162 ASTM E662 Greenguard UL 2818 - Gold

#### KOHLER<sup>®</sup> Plastic Baths and Receptors Lifetime Limited Warranty

See website for detailed warranty information.

#### Available Color/Finishes

Color tiles intended for reference only.

0	White
96	Biscuit
47	Almond

- 47 Almond
- NY Dune
- 95 Ice™ Grey
- G9 Sandbar
- K4 Cashmere
- 58 Thunder™ Grey
- 7 Black Black™






6' Bath

## **Underscore® Rectangle**




### Underscore® Rectangle 6' Bath K-1834

No change in measurement if connected with drain illustrated. (K-7272)




**Drop-In Rim Detail** 




#### **Technical Information**

All product dimensions are nominal.

Installation:	Drop-in, Under-mount
Drain location:	Center
Basin area, bottom:	45-3/4" x 25-15/16" (1162 mm x 659 mm)
Basin area, top:	65-3/8" x 29-5/16" (1661 mm x 745 mm)
Weight:	82 lbs (37.2 kg)
Minimum floor load:	58 lbs/ft² (283.2 kg/m²)
Water depth:	19-7/16" (494 mm)
Water capacity:	112.9 gal (427.4 L)
Cutout:	Drop-in, 71-1/2" x 35-1/2" (1816 mm x
	902 mm)
Minimum flat for door:	2-3/4" (69 mm)

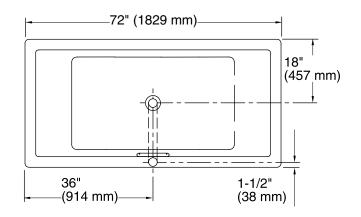

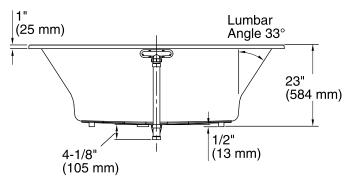

#### Notes

Measure your actual product for rough-in details. Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

Kit is required for under-mount installations (sold separately).

