



**Roca**

# Stone Basel



# Stone Basel

Stone Basel replicates the soft touch of volcanic rock polished by water and its texture under light in a porcelain proposal for both floor and wall. This collection is ideal for those who seek perfection and take care of every detail.



Stone Basel Grafito 24"x48"

## Color Body Porcelain

◇ ▣ 48"x48" R - 24"x48" R - 12"x24" R - 16"x48" R Wall





Stone Basel Caliza 24"x48" R



Stone Basel Gris 12"x24" R



Stone Basel Negro 12"x24" R



# Stone Basel


Color Body Porcelain



48"x48" R 24"x48" R 12"x24" R  
120x120 cm 60x120 cm 30x120 cm



## Caliza




48"x48" R  
FKTEOMHZA1




24"x48" R  
FKTRO54ZA1



12"x24" R  
FKTRO57ZA1

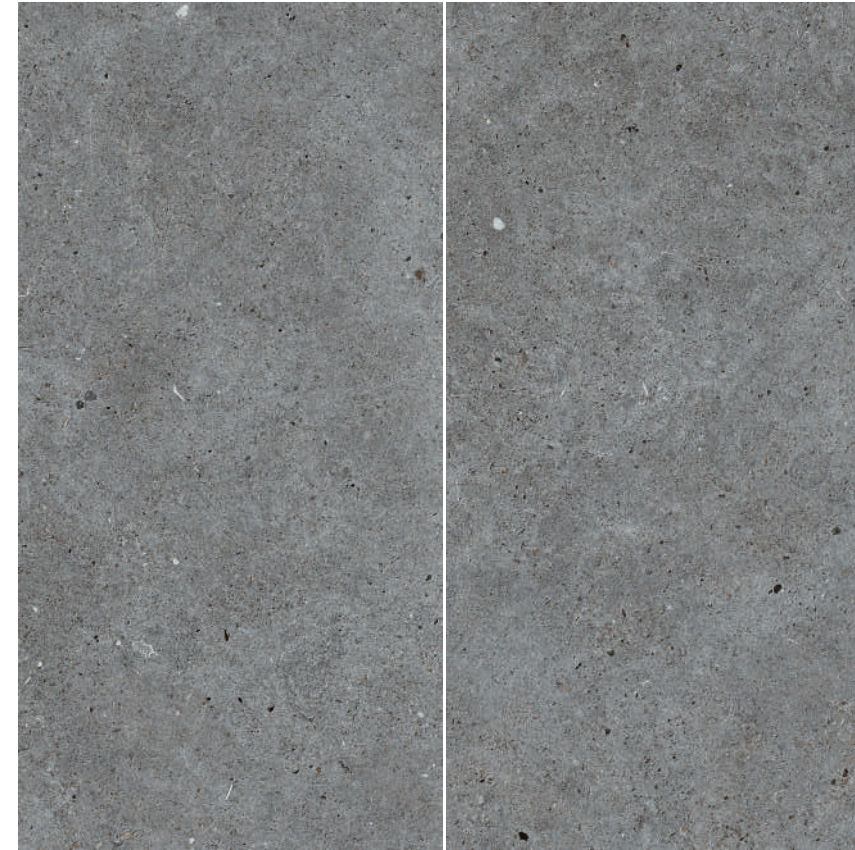

## Grafito



48"x48" R  
FKTEOMHI01




24"x48" R  
FKTRO54I01



12"x24" R  
FKTRO57I01



## Gris



48"x48" R  
FKTEOMHO21




24"x48" R  
FKTRO54O21



12"x24" R  
FKTRO57O21



## Negro



48"x48" R  
FKTEOMHI61



24"x48" R  
FKTRO54I61




12"x24" R  
FKTRO57I61



# Stone Basel

Ceramic Wall


**16"x48" R**  
 40x120 cm

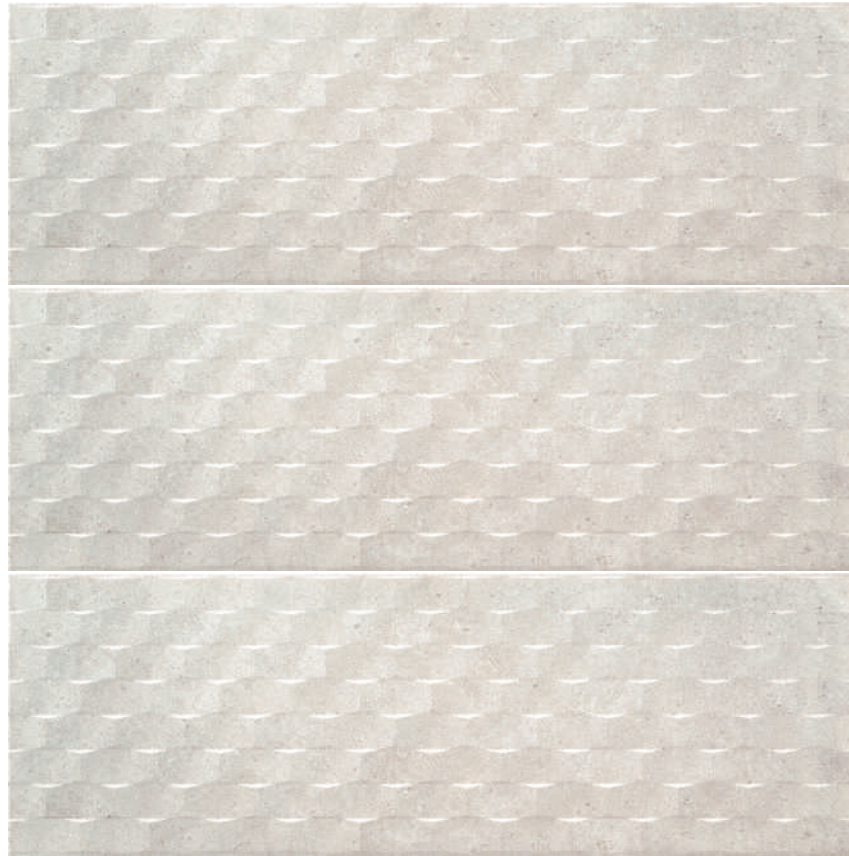

## Suite Caliza



**16"x48" R**  
 FKTR6MCZA1

## Technical Specifications (Floor)

CHARACTERISTICS	STANDARD	DECLARED ASTM
Water Absorption	C373	<=0.5%
Break Strength	C648	Min. 450
Scratch Hardness	MOH's Scale	5
Chemical Resistance	C650	Unaffected
Frost Resistance	C1026	Resistant
Group	See FAQ's	4
Deep Abrasion - Unglazed Tiles	C1243	Pass
PEI- Glazed Tiles***	C1027	-
Minimum Bond Strength (PSI)	C482	165
Dynamic Coefficient of Friction (DCOF)	A137.1	>=0.42
Shade and Texture Rating	CTDA "V"	V3
Facial Dimensions	C499	Pass
Range of Thickness	C499	Pass
Warpage	C485	Pass
Wedging	C502	Pass

## Technical Specifications (Wall)

CHARACTERISTICS	STANDARD	DECLARED ASTM
Water Absorption	C373	>10%
Break Strength	C648	Meets or Exceeds
Scratch Hardness	MOH's Scale	-
Chemical Resistance	C650	Unaffected
Shade and Texture Rating	CTDA "V"	V3
Warpage	C485	Pass
Wedging	C502	Pass

## Packaging Info

Size	SF per carton	PC per carton
12"x24" R	13.56	7
24"x48" R	15.50	2
16"x48" R	15.50	3
48"x48" R	31	2