じ bathonomyShowerMixer

Features

- Pressure balance rough-in valve with 2 way diverter.
 - -Two way selectable through a diverter
- Shut-off valves and integrated anti-return valves.

-Temperature and flow limiter incorporated in cartridge.

- Pressure balance cartridge adjust inlet pressure fluctuations.
- Pressure balance cartridge prevent scalding, cold water supply stops when cold water pressure fail.
- Maximun outlet temperature and flow can be limited.
- Minimun working pressure: 20 Psi (1.4 Bar).
- Maximun working pressure: 125 Psi (8 bar).
- Recommended working pressure: 45 Psi (3 Bar).
- Maximun test pressure: 500 Psi (35 Bar)
- Hot water inlet max. temperature: 180°F (80°C)
- Water inlet and outlet threads: Male 1/2 in. NPT

Material

- Premium material construction with metal handle ensures reliability and durability.
- BATHONOMY finishes resist corrosion and tarnishing.
- Brass

Dimensions

• W: 5.31" * H: 6.31" * D: 3"

Weight

• 4.4 lb.

2 Way Pressure Balance Shower Mixer - Wall Mount - 2"



Codes/Standards COF.SHM.DEV.02.00.BR.SBR

BATHONOMY Faucet Lifetime Limited Warranty See website for detailed warranty

information.

Available Colors/Finishes Color tiles intended for reference only.

| Code | Description |
|------|-------------------|
| BNI | Brushed Nickel |
| MBL | Matt Black |
| PCH | Polished Chrome |
| SBR | Satin Brass |
| | BNI MBL PCH |

Codes / Standards compliance:




Uniform Plumbing Code (UPC) National Plumbing Code of Canada ASME A112.18.1-2018 / CSA B125.1-18 / ASSE 1016 IAPMO file number: 8659 (for more info visit: http://pld.iapmo.org/ default.aspx) SKU for iapmo search LTA1010

Devon

Bathonomy Shower Mixer

Devon

2 Way Pressure Balance Shower Mixer - Wall Mount - 2"

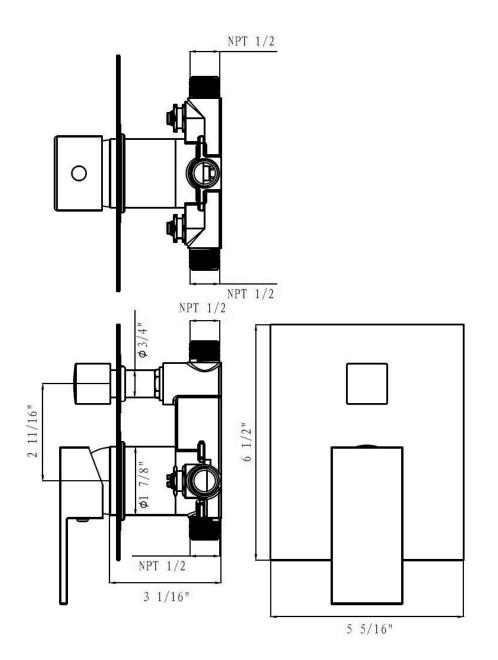

Technical Information

All product dimensions are nominal. Shower head included: No Shower arm: No

Notes Install the product according to the installation guide.