




SupaScoota® SS Hd 02

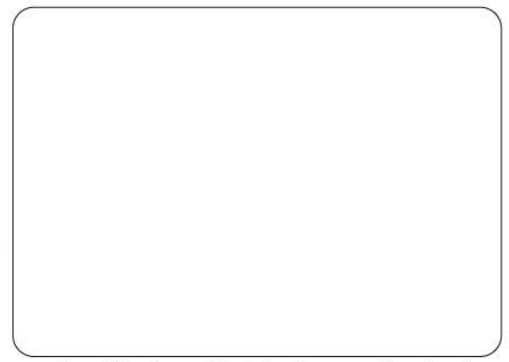

Specifications

Specifications	HD (HD-02)
Number of Wheels	4
Front Wheel Size	200 x 65 mm (8 x 2.5")
Rear Wheel Size	200 x 65 mm (8 x 2.5")
Ground Clearance(tiller)	60 mm (2.4")
Length	1010 mm (40")
Width	570 mm (22.5")
Weight Without Seat	Front frame : 10.2 kg (22.4 lbs), Without Front wheels:8.5kg (18.7 lbs) Back frame : 10kg (22 lbs)
Weight of Seat	7.7 kgs (17 lbs incl. seat frame & arm rest)
Max Loading	125kg (275 lbs) on level ground
Turn Radius	910mm (36")
Motor Output	2 x 150W
Transmission	Worm Drive Gearbox
Reverse	Forward/Reverse Switch
Brakes	Dynamic Braking and Electromagnetic Brake
Battery (SLA)	24V 15 ah - 9.2kg (20 lbs)
Battery (Lithium)	24V 15ah - 4.0 kgs (9 lbs)
Charger (SLA battery)	Off board 24 volt 2 amp
Charger (Lithium battery)	Off board 24 volt 4 amp -0.9 kg (2 lbs)
Max Speed	6.5 kph (4 mph)(2nd speed choice 3.9 Kph -2.4 mph)
Slope Grade Ability	9 Degrees with 120kg (260 lbs) load. 12 Degrees with 100kg (220 lbs) load
Travel Distance	Up to 16 km (10 miles) with standard SLA battery Up to 20 km (12.4 miles) with 15ah lithium battery
Arm Rests	Distance between armrests 45cm - 55cm (18 -22")
Speed Reduction System	Reduces operating speed to a safe level when turning

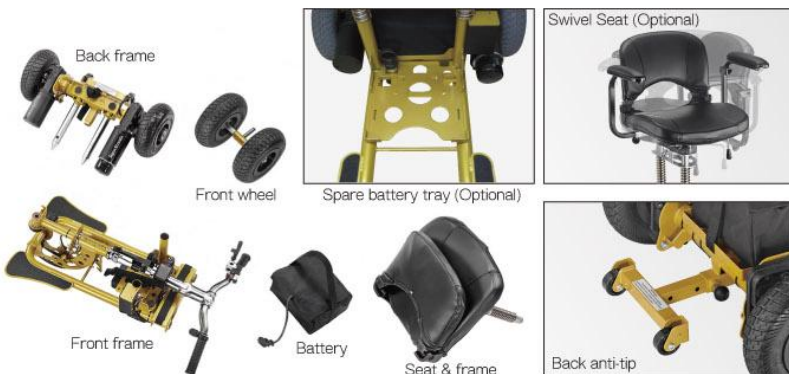

Specification subject to change without notice.