
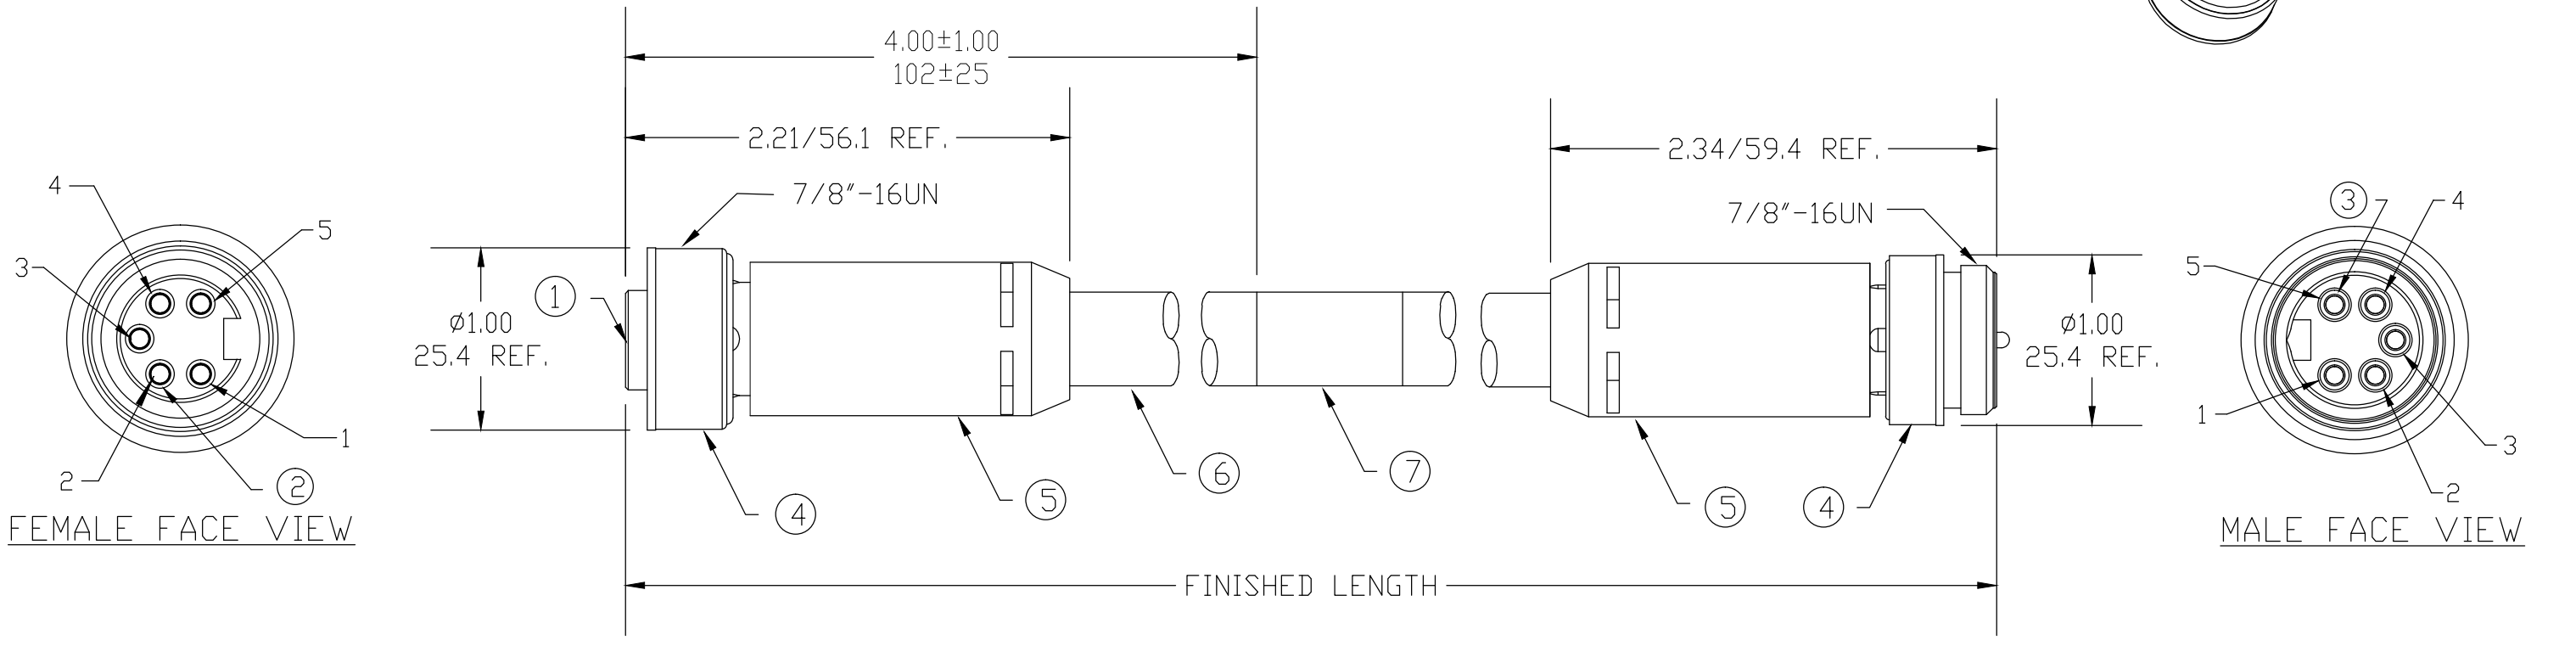


13 12 11 10 9 8 7 6 5 4 3 2 1

MATERIAL NUMBER	OLD PART NUMBER	FINISHED LENGTH(FT/M)	MATERIAL NUMBER	OLD PART NUMBER	FINISHED LENGTH (FT/M)
130025-0048	DN11A-M003	.98' +.75" -0 [3M +19.1 -0]	130025-0097	DN11A-M200	65.62' +24.50" -0 [20.0M +622.3 -0]
130025-0051	DN11A-M005	1.64' +1.75" -0 [5M +44.5 -0]	130025-0099	DN11A-M210	68.90' +24.50" -0 [21.0M +622.3 -0]
130025-0054	DN11A-M010	3.28' +2.19" -0 [1.0M +55.6 -0]	130025-0102	DN11A-M240	78.74' +24.50" -0 [24.0M +622.3 -0]
130025-0061	DN11A-M020	6.56' +3.50" -0 [2.0M +88.9 -0]	130025-0103	DN11A-M250	82.02' +24.50" -0 [25.0M +622.3 -0]
130025-0067	DN11A-M030	9.84' +3.50" -0 [3.0M +88.9 -0]	130025-0105	DN11A-M270	88.58' +24.50" -0 [27.0M +622.3 -0]
130025-0071	DN11A-M040	13.12' +6.50" -0 [4.0M +165.1 -0]	130025-0108	DN11A-M300	98.43' +24.50" -0 [30.0M +622.3 -0]
130025-0073	DN11A-M050	16.40' +6.50" -0 [5.0M +165.1 -0]	130025-0114	DN11A-M350	114.83' +27.57" -0 [35.0M +700.28 -0]
130025-0076	DN11A-M060	19.69' +6.50" -0 [6.0M +165.1 -0]	130025-0117	DN11A-M400	131.23' +31.50" -0 [40.0M +800.1 -0]
130025-0079	DN11A-M070	22.97' +6.50" -0 [7.0M +165.1 -0]	130025-0119	DN11A-M450	147.64' +35.43" -0 [45.0M +899.9 -0]
130025-0084	DN11A-M080	26.25' +12.50" -0 [8.0M +317.5 -0]	130025-0122	DN11A-M500	164.04' +39.40" -0 [50.0M +1000 -0]
130025-0083	DN11A-M090	29.53' +12.50" -0 [9.0M +317.5 -0]	130025-0125	DN11A-M600	196.85' +47.24" -0 [60.0M +1199.90 -0]
130025-0085	DN11A-M100	32.81' +12.50" -0 [10.0M +317.5 -0]	130024-0329	DN11A-M650	213.25' +51.18" -0 [65.0M +1299.97 -0]
130025-0095	DN11A-M120	39.37' +12.50" -0 [12.0M +317.5 -0]	130025-0127	DN11A-M700	229.66' +55.12" -0 [70.0M +1400.05 -0]
130025-0092	DN11A-M150	49.21' +24.50" -0 [15.0M +622.3 -0]			
130025-0095	DN11A-M180	59.05' +24.50" -0 [18.0M +622.3 -0]			

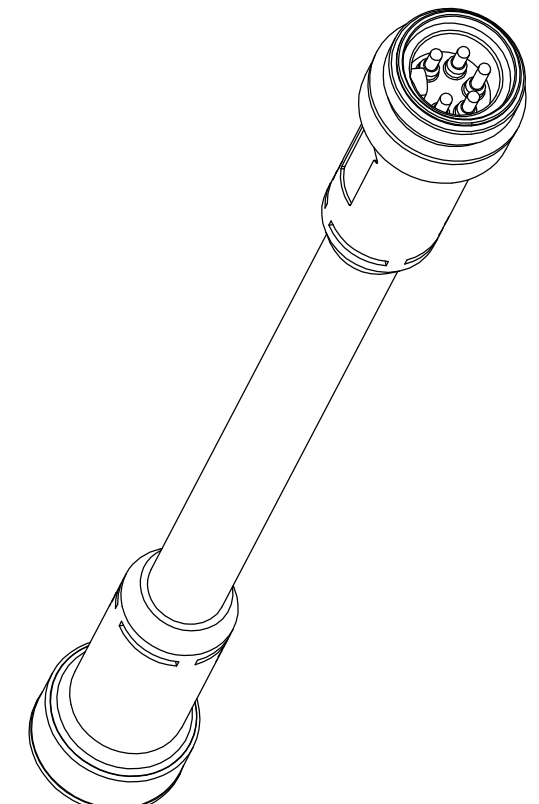

ITEM	COMPONENT	MATERIAL	FINISH
1	INSERT	PVC	GRAY
2	CONTACT SOCKET	COPPER ALLOY	GOLD OVER NICKEL
3	CONTACT PIN	COPPER ALLOY	GOLD OVER NICKEL
4	COUPLING NUT	ZINC DIE CAST	BLACK E-COATED
5	OVERMOLD	PVC	GRAY
6	CABLE-DEVICENET THICK CABLE 2/15 & 2/18 SHIELD PAIR	PVC	GRAY
7	LABEL	MYLAR	BLACK/YELLOW

- SCHEMATIC
- 1 - DRAIN
 - 2 - V+
 - 3 - V-
 - 4 - CAN_H
 - 5 - CAN_L

VOLTAGE RATING	300 VAC/VDC
AMPERAGE RATING	8 AMPS
PROTECTION	IP67
OPERATING TEMPERATURE	-20°C TO 80°C
UL CERTIFICATIONS	UL RECOGNIZED, FILE NO. E152210
CSA CERTIFICATIONS	CSA CERTIFIED, FILE NO. LR6837

ADD LENGTH VARIATIONS EC NO: WNA2011-0420 DRWN: TWOLDEGE 2/15/11 CHKD: LHARTMAN APPR: JFMURPHY 2010/01/20 REV C	QUALITY SYMBOL ▽=0 ▽C=0	GENERAL TOLERANCES (UNLESS SPECIFIED) <table border="1"> <tr><th></th><th>mm</th><th>INCH</th></tr> <tr><td>4 PLACES</td><td>±---</td><td>±---</td></tr> <tr><td>3 PLACES</td><td>±---</td><td>±---</td></tr> <tr><td>2 PLACES</td><td>±---</td><td>±.01</td></tr> <tr><td>1 PLACE</td><td>±0.3</td><td>±---</td></tr> </table>		mm	INCH	4 PLACES	±---	±---	3 PLACES	±---	±---	2 PLACES	±---	±.01	1 PLACE	±0.3	±---	DIMENSION STYLE IN/MM	SCALE 1:1	DESIGN UNITS INCH	THIRD ANGLE PROJECTION
		mm	INCH																		
	4 PLACES	±---	±---																		
	3 PLACES	±---	±---																		
2 PLACES	±---	±.01																			
1 PLACE	±0.3	±---																			
DRAWN BY BW	DATE 2009/03/13	CHECKED BY KJ	DATE 2009/03/13	TITLE MINI-CHANGE 5P M/MFE DEVICENET CORDSET																	
APPROVED BY JFMURPHY	DATE 2010/01/20	MATERIAL NO. SEE CHART			MOLEX INCORPORATED	SHEET NO. 1 OF 1															
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION																					

13 12 11 10 9 8 7 6 5 4 3 2 1