
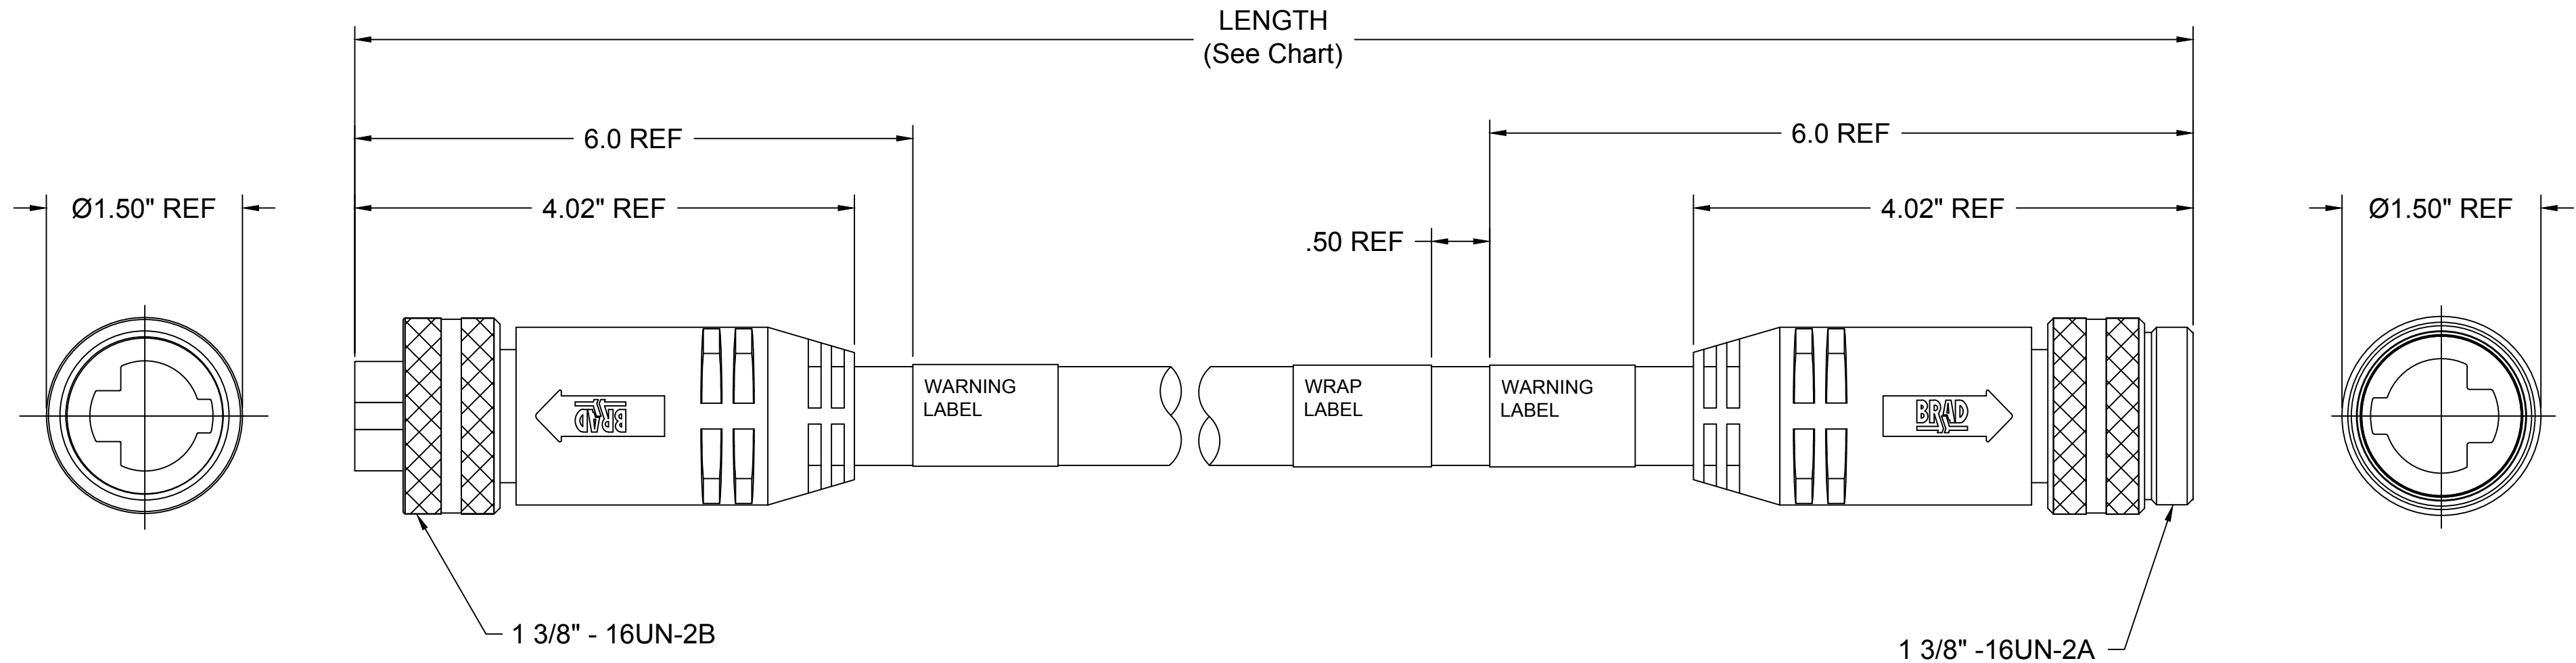


ENG No: CC3130A64MXXX

LENGTH
M005 = 0.5M
M010 = 1M
M100 = 10M

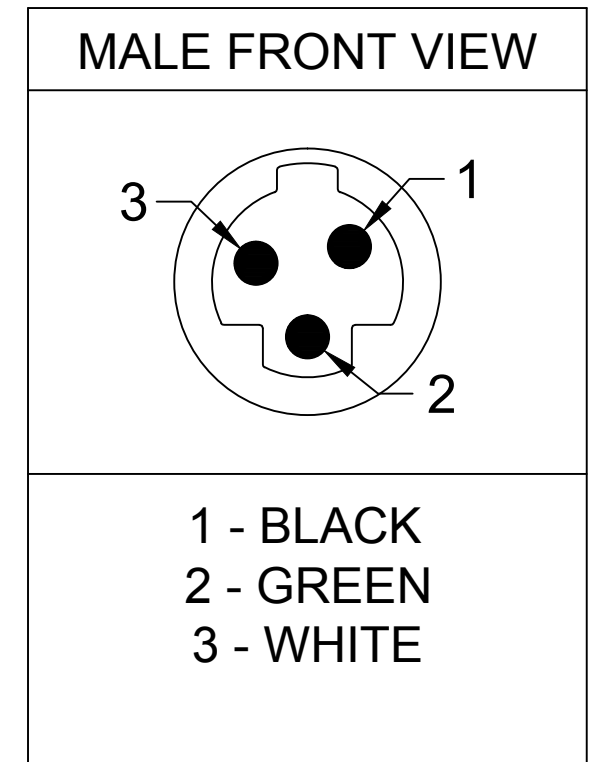

SPECIFICATIONS:

OVERMOLD: BLACK PVC
 INSERT: BLACK PVC
 CONTACTS: COPPER ALLOY, GOLD OVER NICKEL
 COUPLING NUT: ANODIZED ALUMINUM
 CABLE (A64): #10/3 BLACK PVC
 ELECTRICAL: 600V AC/DC, 30A
 TEMPERATURE RATING: -20°C to 105°C
 PROTECTION: IP67

RELEASED EC NO: IFC2015-2148 DRWN: GSUDHINI 2015/06/18 CH'KD: BARDEN 2015/06/24 APPR: JFMURPHY 2015/08/27	DESCRIPTION REV	QUALITY SYMBOL	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION			
		▼=0		mm	INCH	IN/MM		NTS	INCH			
		∇=0	4 PLACES	±---	±---	DRAWN BY	DATE	TITLE				
			3 PLACES	±---	±.005	GSUDHINI	2015/06/18	QUICK CHANGE FEM/MALE STR/STR #10 BLK PVC				
	2 PLACES	±0.13	±.010	CHECKED BY	DATE	MOLEX INCORPORATED						
	1 PLACE	±0.25	±.020	BARDEN	2015/06/24	SD-130064-007						
	ANGULAR ±.5°		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		APPROVED BY	DATE	DOCUMENT NO.		SHEET NO.			
					JFMURPHY	2015/08/27	SD-130064-007		1 OF 1			
					MATERIAL NO. SEE MATRIX		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					
					SIZE C							