
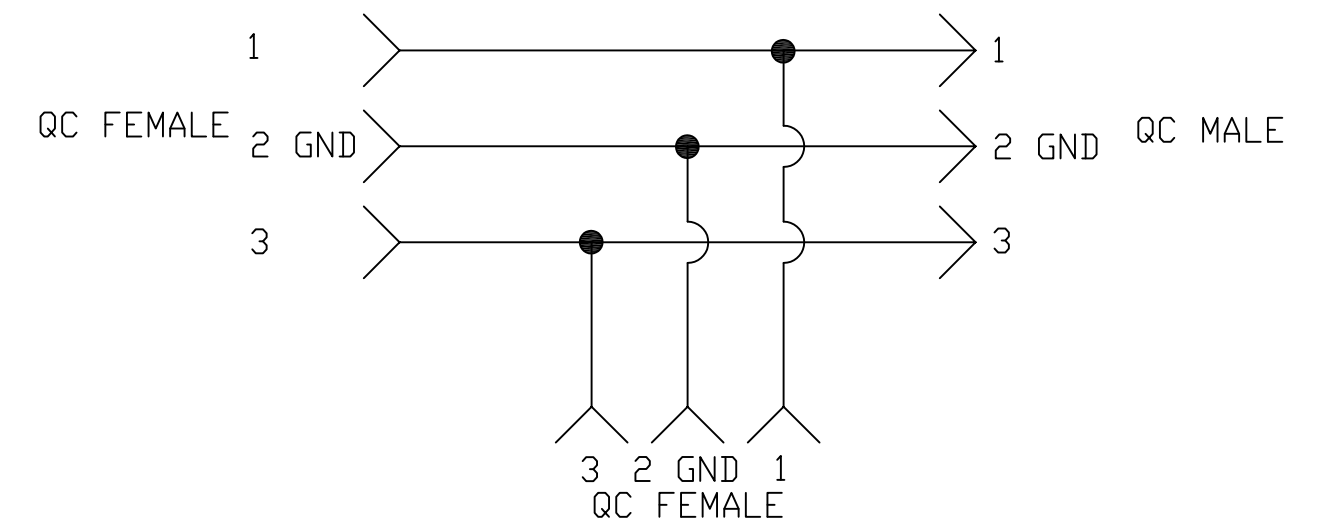
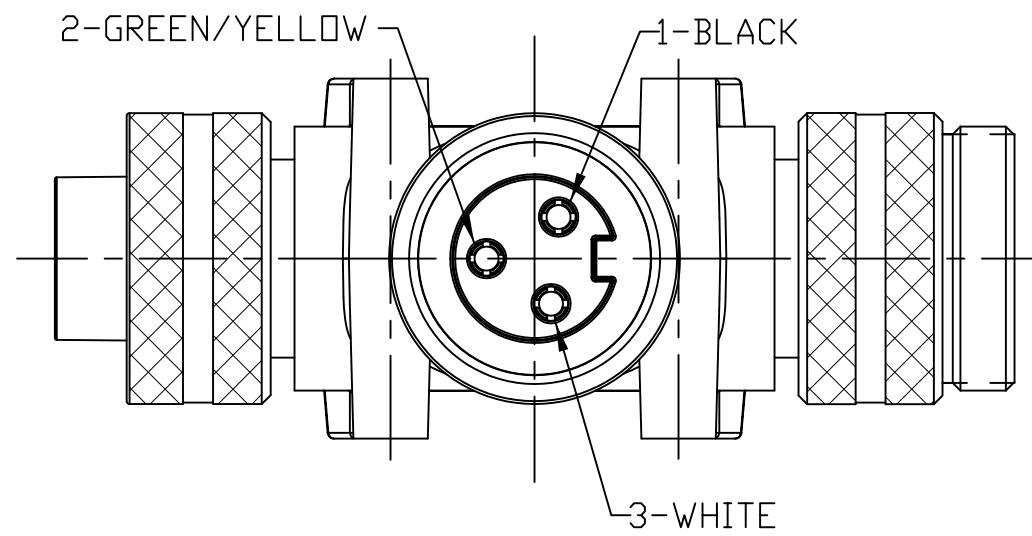
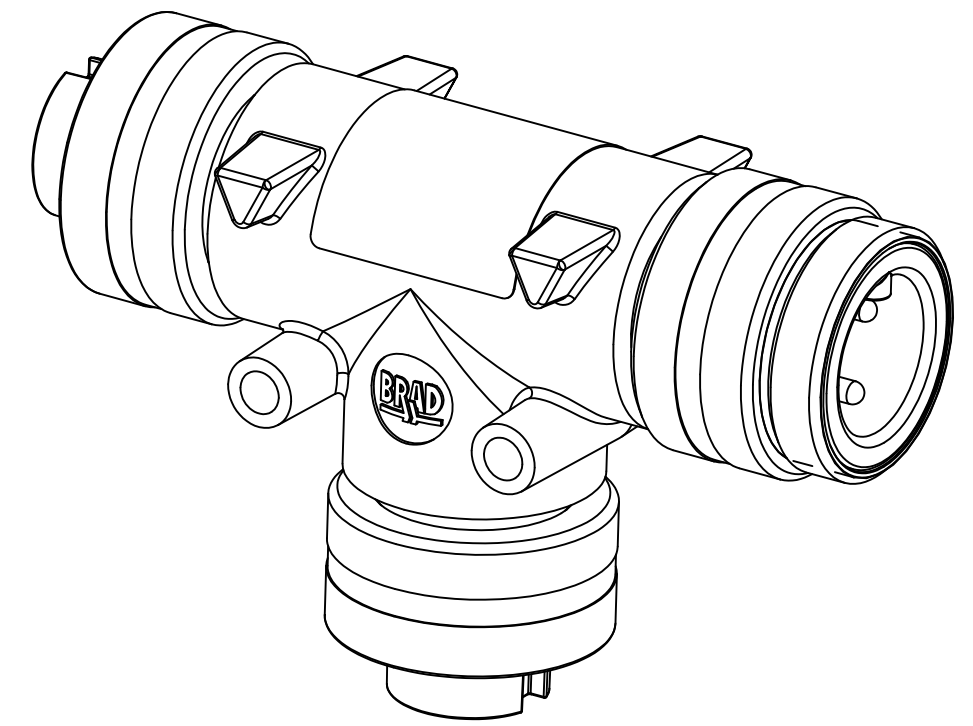
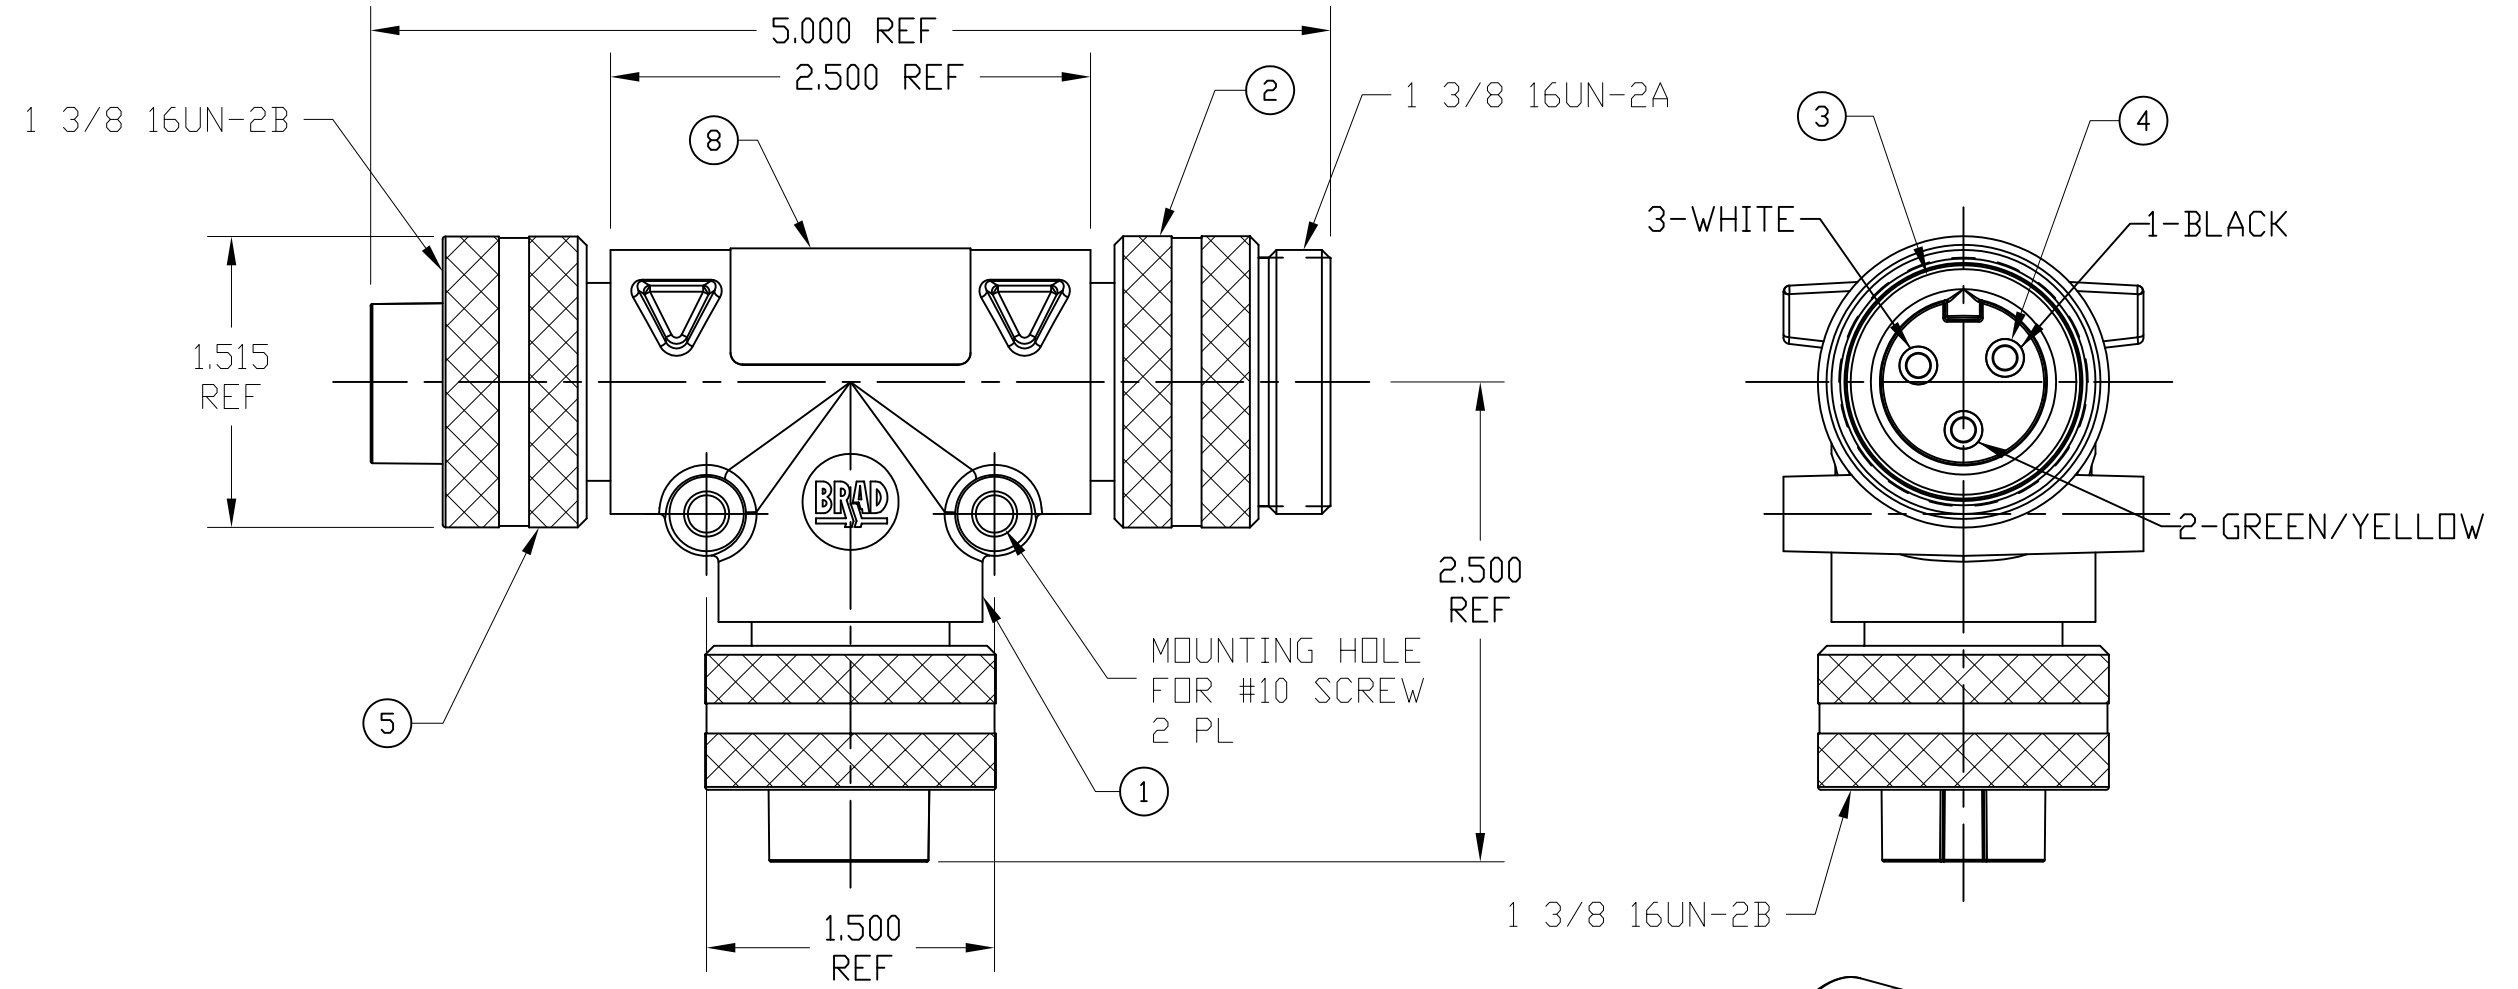


PART NUMBER	ENGINEERING NUMBER
1300680045	TC30C30-200

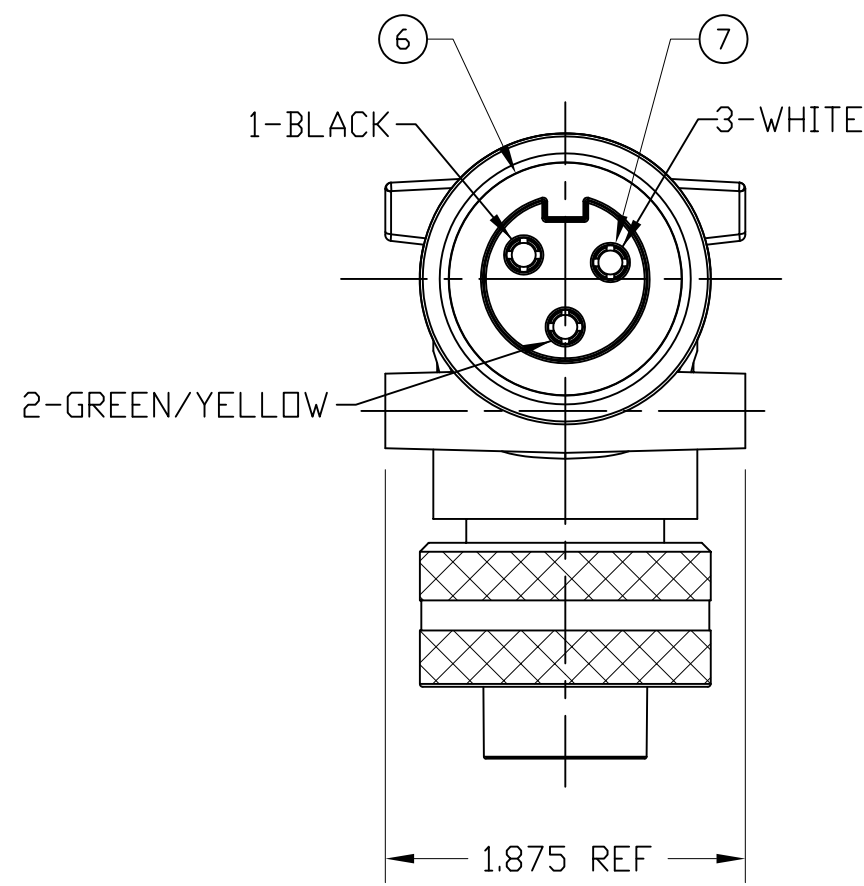

WIRE DIAGRAM

NOTE:

- 1) LABEL IS MARKED WITH P/N, DATE CODE, VOLTAGE & AMPERAGE
- 2) ELECTRICAL DATA:
TEE QC TO QC
POLES: 3
MAX. VOLTAGE: 600V AC/DC
MAX. THRU CURRENT: 30A
MAX. DROP CURRENT: 30A
PROTECTION: IP67
TEMPERATURE RANGE: -20°C TO 90°C
- 3) PACKAGING:
ASSEMBLIES ARE BAGGED SEPERATELY IN POLY BAGS WITH BAR CODE LABEL ATTACHED TO THE OUTSIDE OF THE BAG.
- 4) ASSEMBLY IS RoHS COMPLIANT
- 5) CERTIFICATION:
UL LISTED/CSA CERTIFIED , FILE E258922

ITEM	QTY	DESCRIPTION	MATERIAL	FINISH
8	1	LABEL	PLASTIC FILM	BLACK/YELLOW
7	6	QC SOCKET CONTACT	COPPER ALLOY	GOLD PLATED
6	2	QC FEMALE INSERT	PVC	BLACK
5	2	QC FEMALE COUPLING NUT	ALUMINUM	CLEAR ANODIZE
4	3	QC PIN CONTACT	COPPER ALLOY	GOLD PLATED
3	1	QC MALE INSERT	PVC	BLACK
2	1	QC MALE COUPLING NUT	ALUMINUM	CLEAR ANODIZE
1	1	OVERMOLD	PVC	GRAY

INITIAL RELEASE EC NO: WNA2010-0424 DRWN: KJOZWIK 2010/01/13 CH'KD: BWOODMAN APPR: JFMURPHY 2010/01/15	QUALITY SYMBOL	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION	
	$\nabla=0$ $C=0$	4 PLACES	mm INCH	IN/MM		1:1	INCH		
		3 PLACES	±--- ±---	DRAWN BY DATE		TITLE			
		2 PLACES	±0.13 ±0.10	KJOZWIK 2010/01/13		BRAD POWER QC 3 POLE TEE W/3 POLE QC DROP			
	1 PLACE	±0.25 ±0.20	CHECKED BY DATE		MOLEX INCORPORATED				
		ANGULAR ±1/2°	APPROVED BY DATE		DOCUMENT NO.		SHEET NO.		
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	JFMURPHY 2010/01/15		SD-130068-006		1 OF 1		
			MATERIAL NO.		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				
			SEE TABLE						
			SIZE C						