

Feed-through terminal block - UT 2,5/1P BU - 3045020

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Feed-through terminal block, Connection method: Screw/plug-in connection, Cross section: 0.14 mm² - 4 mm², AWG: 26 - 12, Width: 5.2 mm, Color: blue, Mounting type: NS 35/7,5, NS 35/15

Why buy this product

- Terminal blocks that can be connected on both sides available
- Compatible with standard UT terminal blocks
- Uniform, touch-proof plug-in zone



Key Commercial Data

Packing unit	1 STK
Minimum order quantity	50 STK
Weight per Piece (excluding packing)	7.200 g
Custom tariff number	85369010
Country of origin	Germany

Technical data

General

Number of levels	1
Number of connections	2
Potentials	1
Nominal cross section	2.5 mm ²
Color	blue
Insulating material	PA
Flammability rating according to UL 94	V0
Rated surge voltage	6 kV

Feed-through terminal block - UT 2,5/1P BU - 3045020

Technical data

General

Degree of pollution	3
Overvoltage category	III
Insulating material group	I
Maximum load current	24 A (with 4 mm ² conductor cross section)
Nominal current I _N	24 A
Nominal voltage U _N	500 V
Open side panel	Yes
Relative insulation material temperature index (Elec., UL 746 B)	130 °C
Temperature index of insulation material (DIN EN 60216-1 (VDE 0304-21))	130 °C
Static insulating material application in cold	-60 °C
Behavior in fire for rail vehicles (DIN 5510-2)	Test passed
Flame test method (DIN EN 60695-11-10)	V0
Oxygen index (DIN EN ISO 4589-2)	>32 %
NF F16-101, NF F10-102 Class I	2
NF F16-101, NF F10-102 Class F	2
Surface flammability NFPA 130 (ASTM E 162)	passed
Specific optical density of smoke NFPA 130 (ASTM E 662)	passed
Smoke gas toxicity NFPA 130 (SMP 800C)	passed
Calorimetric heat release NFPA 130 (ASTM E 1354)	28 MJ/kg
Fire protection for rail vehicles (DIN EN 45545-2) R22	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R23	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R24	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R26	HL 1 - HL 3

Dimensions

Width	5.2 mm
End cover width	2.2 mm
Length	49.1 mm
Height NS 35/7,5	47.5 mm
Height NS 35/15	55 mm

Connection data

Connection method	Screw/plug-in connection
Connection in acc. with standard	IEC 61984
Conductor cross section solid min.	0.14 mm ²
Conductor cross section solid max.	4 mm ²
Conductor cross section AWG min.	26
Conductor cross section AWG max.	12

Feed-through terminal block - UT 2,5/1P BU - 3045020

Technical data

Connection data

Conductor cross section flexible min.	0.14 mm ²
Conductor cross section flexible max.	4 mm ²
Min. AWG conductor cross section, flexible	26
Max. AWG conductor cross section, flexible	12
Conductor cross section flexible, with ferrule without plastic sleeve min.	0.14 mm ²
Conductor cross section flexible, with ferrule without plastic sleeve max.	2.5 mm ²
Conductor cross section flexible, with ferrule with plastic sleeve min.	0.14 mm ²
Conductor cross section flexible, with ferrule with plastic sleeve max.	2.5 mm ²
2 conductors with same cross section, solid min.	0.14 mm ²
2 conductors with same cross section, solid max.	1.5 mm ²
2 conductors with same cross section, stranded min.	0.14 mm ²
2 conductors with same cross section, stranded max.	1.5 mm ²
2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve, min.	0.5 mm ²
2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve, max.	1.5 mm ²
2 conductors with same cross section, stranded, ferrules without plastic sleeve, min.	0.14 mm ²
2 conductors with same cross section, stranded, ferrules without plastic sleeve, max.	1.5 mm ²
Stripping length	9 mm
Internal cylindrical gage	A3
Screw thread	M3
Tightening torque, min	0.5 Nm
Tightening torque max	0.6 Nm

Standards and Regulations

Connection in acc. with standard	CSA
	IEC 61984
Flammability rating according to UL 94	V0


Drawings

Feed-through terminal block - UT 2,5/1P BU - 3045020

Circuit diagram




Diagram

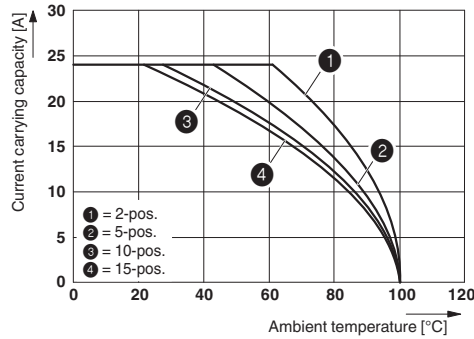

The figure shows the derating curve of the UT 2,5/1P... terminal block in connection with the UPBV 2,5 plug

Dimensional drawing



Classifications

eCl@ss

eCl@ss 4.0	27141117
eCl@ss 4.1	27141117
eCl@ss 5.0	27141120
eCl@ss 5.1	27141120
eCl@ss 6.0	27141120
eCl@ss 7.0	27141120
eCl@ss 8.0	27141120
eCl@ss 9.0	27141120

ETIM

ETIM 2.0	EC000897
ETIM 3.0	EC000897
ETIM 4.0	EC000897
ETIM 5.0	EC000897

Feed-through terminal block - UT 2,5/1P BU - 3045020

Classifications

UNSPSC

UNSPSC 6.01	30211811
UNSPSC 7.0901	39121410
UNSPSC 11	39121410
UNSPSC 12.01	39121410
UNSPSC 13.2	39121410

Approvals


Approvals


Approvals

CSA / UL Recognized / cUL Recognized / EAC / EAC / cULus Recognized

Ex Approvals

Approval details

CSA  http://www.csagroup.org/us/en/services/testing-and-certification/certified-product-listing 13631		
	B	C
mm ² /AWG/kcmil	26-12	26-12
Nominal current I _N	20 A	20 A
Nominal voltage U _N	300 V	300 V

UL Recognized  http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm FILE E 60425	
mm ² /AWG/kcmil	26-12
Nominal current I _N	20 A
Nominal voltage U _N	300 V

Feed-through terminal block - UT 2,5/1P BU - 3045020

Approvals

cUL Recognized http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm FILE E 60425	
mm ² /AWG/kcmil	26-12
Nominal current I _N	20 A
Nominal voltage U _N	300 V

EAC 7500651.22.01.00246

EAC EAC-Zulassung

cULus Recognized http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm
--

Accessories

Accessories

DIN rail

DIN rail perforated - NS 35/ 7,5 PERF 2000MM - 0801733



DIN rail, material: steel galvanized and passivated with a thick layer, perforated, height 7.5 mm, width 35 mm, length: 2000 mm

DIN rail, unperforated - NS 35/ 7,5 UNPERF 2000MM - 0801681



DIN rail, material: Steel, unperforated, height 7.5 mm, width 35 mm, length: 2 m

Feed-through terminal block - UT 2,5/1P BU - 3045020

Accessories

DIN rail perforated - NS 35/ 7,5 WH PERF 2000MM - 1204119



DIN rail 35 mm (NS 35)

DIN rail - NS 35/ 7,5 WH UNPERF 2000MM - 1204122



DIN rail 35 mm (NS 35)

DIN rail, unperforated - NS 35/ 7,5 AL UNPERF 2000MM - 0801704



DIN rail, unperforated, Width: 35 mm, Height: 7.5 mm, Length: 2000 mm, Color: silver

DIN rail perforated - NS 35/ 7,5 ZN PERF 2000MM - 1206421



DIN rail, material: Galvanized, perforated, height 7.5 mm, width 35 mm, length: 2 m

DIN rail, unperforated - NS 35/ 7,5 ZN UNPERF 2000MM - 1206434



DIN rail, material: Galvanized, unperforated, height 7.5 mm, width 35 mm, length: 2 m

Feed-through terminal block - UT 2,5/1P BU - 3045020

Accessories

DIN rail, unperforated - NS 35/ 7,5 CU UNPERF 2000MM - 0801762



DIN rail, material: Copper, unperforated, height 7.5 mm, width 35 mm, length: 2 m

End cap - NS 35/ 7,5 CAP - 1206560



DIN rail end piece, for DIN rail NS 35/7.5

DIN rail perforated - NS 35/15 PERF 2000MM - 1201730



DIN rail, material: steel galvanized and passivated with a thick layer, perforated, height 15 mm, width 35 mm, length: 2000 mm

DIN rail, unperforated - NS 35/15 UNPERF 2000MM - 1201714



DIN rail, material: Steel, unperforated, height 15 mm, width 35 mm, length: 2 m

DIN rail perforated - NS 35/15 WH PERF 2000MM - 0806602



DIN rail 35 mm (NS 35)

Feed-through terminal block - UT 2,5/1P BU - 3045020

Accessories

DIN rail - NS 35/15 WH UNPERF 2000MM - 1204135



DIN rail 35 mm (NS 35)

DIN rail, unperforated - NS 35/15 AL UNPERF 2000MM - 1201756



DIN rail, deep drawn, high profile, unperforated, 1.5 mm thick, material: aluminum, height 15 mm, width 35 mm, length 2000 mm

DIN rail perforated - NS 35/15 ZN PERF 2000MM - 1206599



DIN rail, material: Galvanized, perforated, height 15 mm, width 35 mm, length: 2 m

DIN rail, unperforated - NS 35/15 ZN UNPERF 2000MM - 1206586



DIN rail, material: Galvanized, unperforated, height 15 mm, width 35 mm, length: 2 m

DIN rail, unperforated - NS 35/15 CU UNPERF 2000MM - 1201895



DIN rail, material: Copper, unperforated, 1.5 mm thick, height 15 mm, width 35 mm, length: 2 m

Feed-through terminal block - UT 2,5/1P BU - 3045020

Accessories

End cap - NS 35/15 CAP - 1206573



DIN rail end piece, for DIN rail NS 35/15

DIN rail, unperforated - NS 35/15-2,3 UNPERF 2000MM - 1201798



DIN rail, material: Steel, unperforated, 2.3 mm thick, height 15 mm, width 35 mm, length: 2 m

End block

End clamp - CLIPFIX 35 - 3022218



Quick mounting end clamp for NS 35/7,5 DIN rail or NS 35/15 DIN rail, with marking option, width: 9.5 mm, color: gray

End clamp - CLIPFIX 35-5 - 3022276



Quick mounting end clamp for NS 35/7,5 DIN rail or NS 35/15 DIN rail, with marking option, with parking option for FBS...5, FBS...6, KSS 5, KSS 6, width: 5.15 mm, color: gray

End clamp - E/NS 35 N - 0800886



End clamp, width: 9.5 mm, color: gray

Feed-through terminal block - UT 2,5/1P BU - 3045020

Accessories

End cover

End cover - D-UT 2,5/1P - 3047154



End cover, Length: 47.6 mm, Width: 2.2 mm, Height: 39.8 mm, Color: gray

Flange

Screw flange - UT 2,5/1P-F - 3060445



Screw flange, for screwing COMBI plugs, with the same structure and pitch as the relevant COMBI terminal blocks

Insulating sleeve

Insulating sleeve - MPS-IH WH - 0201663



Insulating sleeve, Color: white

Insulating sleeve - MPS-IH RD - 0201676



Insulating sleeve, Color: red

Feed-through terminal block - UT 2,5/1P BU - 3045020

Accessories

Insulating sleeve - MPS-IH BU - 0201689



Insulating sleeve, Color: blue

Insulating sleeve - MPS-IH YE - 0201692



Insulating sleeve, Color: yellow

Insulating sleeve - MPS-IH GN - 0201702



Insulating sleeve, Color: green

Insulating sleeve - MPS-IH GY - 0201728



Insulating sleeve, Color: gray

Insulating sleeve - MPS-IH BK - 0201731



Insulating sleeve, Color: black

Jumper

Feed-through terminal block - UT 2,5/1P BU - 3045020

Accessories

Plug-in bridge - FBS 2-5 - 3030161



Plug-in bridge, Pitch: 5.2 mm, Length: 22.7 mm, Width: 9 mm, Number of positions: 2, Color: red

Plug-in bridge - FBS 3-5 - 3030174



Plug-in bridge, Pitch: 5.2 mm, Length: 22.7 mm, Width: 14.2 mm, Number of positions: 3, Color: red

Plug-in bridge - FBS 4-5 - 3030187



Plug-in bridge, Pitch: 5.2 mm, Length: 22.7 mm, Width: 19.4 mm, Number of positions: 4, Color: red

Plug-in bridge - FBS 5-5 - 3030190



Plug-in bridge, Pitch: 5.2 mm, Length: 22.7 mm, Width: 24.6 mm, Number of positions: 5, Color: red

Plug-in bridge - FBS 10-5 - 3030213



Plug-in bridge, Pitch: 5.2 mm, Length: 22.7 mm, Width: 50.6 mm, Number of positions: 10, Color: red

Feed-through terminal block - UT 2,5/1P BU - 3045020

Accessories

Plug-in bridge - FBS 20-5 - 3030226



Plug-in bridge, Pitch: 5.2 mm, Number of positions: 20, Color: red

Plug-in bridge - FBS 50-5 - 3038930



Plug-in bridge, Pitch: 5.2 mm, Number of positions: 50, Color: red

Plug-in bridge - FBSR 2-5 - 3033702



Plug-in bridge, Pitch: 5.2 mm, Number of positions: 2, Color: red

Plug-in bridge - FBSR 3-5 - 3001591



Plug-in bridge, Pitch: 5.2 mm, Number of positions: 3, Color: red

Plug-in bridge - FBSR 4-5 - 3001592



Plug-in bridge, Pitch: 5.2 mm, Number of positions: 4, Color: red

Feed-through terminal block - UT 2,5/1P BU - 3045020

Accessories

Plug-in bridge - FBSR 5-5 - 3001593



Plug-in bridge, Pitch: 5.2 mm, Number of positions: 5, Color: red

Plug-in bridge - FBSR 10-5 - 3033710



Plug-in bridge, Pitch: 5.2 mm, Number of positions: 10, Color: red

Labeled terminal marker

Zack marker strip - ZB 5 CUS - 0824962



Zack marker strip, can be ordered: Strip, white, labeled according to customer specifications, Mounting type: Snap into tall marker groove, for terminal block width: 5.2 mm, Lettering field: 5.15 x 10.5 mm

Zack marker strip - ZB 5,LGS:FORTL.ZAHLEN - 1050017



Zack marker strip, Strip, white, labeled, Printed horizontally: Consecutive numbers 1 - 10, 11 - 20, etc. up to 491 - 500, Mounting type: Snap into tall marker groove, for terminal block width: 5.2 mm, Lettering field: 5.15 x 10.5 mm

Zack marker strip - ZB 5,QR:FORTL.ZAHLEN - 1050020



Zack marker strip, Strip, white, labeled, can be labeled with: Plotter, Printed vertically: Consecutive numbers 1 - 10, 11 - 20, etc. up to 491 - 500, Mounting type: Snap into tall marker groove, for terminal block width: 5.2 mm, Lettering field: 5.15 x 10.5 mm

Feed-through terminal block - UT 2,5/1P BU - 3045020

Accessories

Zack marker strip - ZB 5,LGS:GLEICHE ZAHLEN - 1050033



Zack marker strip, Strip, white, labeled, can be labeled with: Plotter, Printed horizontally: Identical numbers 1 or 2, etc. up to 100, Mounting type: Snap into tall marker groove, for terminal block width: 5.2 mm, Lettering field: 5.15 x 10.5 mm

Marker for terminal blocks - ZB 5,LGS:L1-N,PE - 1050415



Marker for terminal blocks, Strip, white, labeled, Horizontal: L1, L2, L3, N, PE, L1, L2, L3, N, PE, Mounting type: Snap into tall marker groove, for terminal block width: 5.2 mm, Lettering field: 5.15 x 10.5 mm

Marker for terminal blocks - UC-TM 5 CUS - 0824581



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, Mounting type: Snap into tall marker groove, for terminal block width: 5.2 mm, Lettering field: 10.5 x 4.6 mm

Marker for terminal blocks - UCT-TM 5 CUS - 0829595



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, Mounting type: Snap into tall marker groove, Lettering field: 4.6 x 10.5 mm

Marker pen

Marker pen - X-PEN 0,35 - 0811228



Marker pen without ink cartridge, for manual labeling of markers, labeling extremely wipe-proof, line thickness 0.35 mm

Feed-through terminal block - UT 2,5/1P BU - 3045020

Accessories

Partition plate

Partition plate - ATP-UT - 3047167



Partition plate, Length: 50 mm, Width: 2.2 mm, Height: 48 mm, Color: gray

Spacer plate - DP PS-5 - 3036725



Spacer plate, Length: 22.4 mm, Width: 5.2 mm, Height: 29 mm, Number of positions: 1, Color: red

Reducing bridge

Reducing bridge - RB UT 10-(2,5/4) - 3047060



Reducing bridge, Pitch: 9.5 mm, Number of positions: 2, Color: red

Screwdriver tools

Screwdriver - SZS 0,6X3,5 - 1205053



Actuation tool, for ST terminal blocks, insulated, also suitable for use as a bladed screwdriver, size: 0.6 x 3.5 x 100 mm, 2-component grip, with non-slip grip

Terminal marking

Feed-through terminal block - UT 2,5/1P BU - 3045020

Accessories

Zack marker strip - ZB 5 :UNBEDRUCKT - 1050004



Zack marker strip, Strip, white, unlabeled, can be labeled with: Plotter, Mounting type: Snap into tall marker groove, for terminal block width: 5.2 mm, Lettering field: 5.1 x 10.5 mm

Marker for terminal blocks - UC-TM 5 - 0818108



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: BLUEMARK CLED, BLUEMARK LED, Mounting type: Snap into tall marker groove, for terminal block width: 5.2 mm, Lettering field: 10.5 x 4.6 mm

Marker for terminal blocks - UCT-TM 5 - 0828734



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: THERMOMARK CARD, BLUEMARK CLED, BLUEMARK LED, TOPMARK LASER, Mounting type: Snap into tall marker groove, for terminal block width: 5.2 mm, Lettering field: 4.6 x 10.5 mm

Test plug terminal block

Test plugs - MPS-MT - 0201744



Test plugs, Color: silver

Test plugs - PS-5 - 3030983



Test plugs, Color: red

Feed-through terminal block - UT 2,5/1P BU - 3045020

Accessories

Test plugs - PS-5/2,3MM RD - 3038723



Test plugs, Color: red

Test socket

Test adapter - PAI-4-FIX-5/6 BU - 3035975



4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch

Test adapter - PAI-4-FIX-5/6 OG - 3035974



4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch

Test adapter - PAI-4-FIX-5/6 YE - 3035977



4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch

Test adapter - PAI-4-FIX-5/6 RD - 3035976



4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch

Feed-through terminal block - UT 2,5/1P BU - 3045020

Accessories

Test adapter - PAI-4-FIX-5/6 GN - 3035978



4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch

Test adapter - PAI-4-FIX-5/6 BK - 3035980



4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch

Test adapter - PAI-4-FIX-5/6 GY - 3035982



4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch

Test adapter - PAI-4-FIX-5/6 VT - 3035979



4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch

Test adapter - PAI-4-FIX-5/6 BN - 3035981



4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch

Feed-through terminal block - UT 2,5/1P BU - 3045020

Accessories

Test adapter - PAI-4-FIX-5/6 WH - 3035983



4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch

Test adapter - PAI-4-N GY - 3032871



4 mm test adapter, for terminal blocks with 5.2 mm, 6.2 mm and 8.2 mm pitch

Additional products

Plug - SP 2,5/ 1 - 3040258



Plug, Connection method: Spring-cage connection, Number of positions: 1, Cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, Width: 5.2 mm, Height: 39 mm, Color: gray

Plug - SP 2,5/ 2 - 3040261



Plug, Connection method: Spring-cage connection, Number of positions: 2, Cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, Width: 10.4 mm, Height: 39 mm, Color: gray

Plug - SP 2,5/ 3 - 3040274



Plug, Connection method: Spring-cage connection, Number of positions: 3, Cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, Width: 15.6 mm, Height: 39 mm, Color: gray

Feed-through terminal block - UT 2,5/1P BU - 3045020

Accessories

Plug - SP 2,5/ 4 - 3040287



Plug, Connection method: Spring-cage connection, Number of positions: 4, Cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, Width: 20.8 mm, Height: 39 mm, Color: gray

Plug - SP 2,5/ 5 - 3040290



Plug, Connection method: Spring-cage connection, Number of positions: 5, Cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, Width: 26 mm, Height: 39 mm, Color: gray

Plug - SP 2,5/ 6 - 3040300



Plug, Connection method: Spring-cage connection, Number of positions: 6, Cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, Width: 31.2 mm, Height: 39 mm, Color: gray

Plug - SP 2,5/ 7 - 3040313



Plug, Connection method: Spring-cage connection, Number of positions: 7, Cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, Width: 36.4 mm, Height: 39 mm, Color: gray

Plug - SP 2,5/ 8 - 3040326



Plug, Connection method: Spring-cage connection, Number of positions: 8, Cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, Width: 41.6 mm, Height: 39 mm, Color: gray

Feed-through terminal block - UT 2,5/1P BU - 3045020

Accessories

Plug - SP 2,5/ 9 - 3040339



Plug, Connection method: Spring-cage connection, Number of positions: 9, Cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, Width: 46.8 mm, Height: 39 mm, Color: gray

Plug - SP 2,5/10 - 3040342



Plug, Connection method: Spring-cage connection, Number of positions: 10, Cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, Width: 52 mm, Height: 39 mm, Color: gray

Plug - SP 2,5/11 - 3040355



Plug, Connection method: Spring-cage connection, Number of positions: 11, Cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, Width: 57.2 mm, Height: 39 mm, Color: gray

Plug - SP 2,5/12 - 3040368



Plug, Connection method: Spring-cage connection, Number of positions: 12, Cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, Width: 62.4 mm, Height: 39 mm, Color: gray

Plug - SP 2,5/13 - 3040371



Plug, Connection method: Spring-cage connection, Number of positions: 13, Cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, Width: 67.6 mm, Height: 39 mm, Color: gray

Feed-through terminal block - UT 2,5/1P BU - 3045020

Accessories

Plug - SP 2,5/14 - 3040384



Plug, Connection method: Spring-cage connection, Number of positions: 14, Cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, Width: 72.8 mm, Height: 39 mm, Color: gray

Plug - SP 2,5/15 - 3040397



Plug, Connection method: Spring-cage connection, Number of positions: 15, Cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, Width: 78 mm, Height: 39 mm, Color: gray

Plug - SP 2,5/ 1 BU - 3040698



Plug, Connection method: Spring-cage connection, Number of positions: 1, Cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, Width: 5.2 mm, Height: 39 mm, Color: blue

Plug - SP 2,5/ 1 GNYE - 3040708



Plug, Connection method: Spring-cage connection, Number of positions: 1, Cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, Width: 5.2 mm, Height: 39 mm, Color: green-yellow

Plug - SPB 2,5/ 1 - 3040106



Plug, Connection method: Spring-cage connection, Number of positions: 1, Cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, Width: 5.2 mm, Height: 39 mm, Color: gray

Feed-through terminal block - UT 2,5/1P BU - 3045020

Accessories

Plug - SPB 2,5/ 2 - 3040119



Plug, Connection method: Spring-cage connection, Number of positions: 2, Cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, Width: 10.4 mm, Height: 39 mm, Color: gray

Plug - SPB 2,5/ 3 - 3040122



Plug, Connection method: Spring-cage connection, Number of positions: 3, Cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, Width: 15.6 mm, Height: 39 mm, Color: gray

Plug - SPB 2,5/ 4 - 3040135



Plug, Connection method: Spring-cage connection, Number of positions: 4, Cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, Width: 20.8 mm, Height: 39 mm, Color: gray

Plug - SPB 2,5/ 5 - 3040143



Plug, Connection method: Spring-cage connection, Number of positions: 5, Cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, Width: 26 mm, Height: 39 mm, Color: gray

Plug - SPB 2,5/ 6 - 3040151



Plug, Connection method: Spring-cage connection, Number of positions: 6, Cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, Width: 31.2 mm, Height: 39 mm, Color: gray

Feed-through terminal block - UT 2,5/1P BU - 3045020

Accessories

Plug - SPB 2,5/ 7 - 3040164



Plug, Connection method: Spring-cage connection, Number of positions: 7, Cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, Width: 36.4 mm, Height: 39 mm, Color: gray

Plug - SPB 2,5/ 8 - 3040177



Plug, Connection method: Spring-cage connection, Number of positions: 8, Cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, Width: 41.6 mm, Height: 39 mm, Color: gray

Plug - SPB 2,5/ 9 - 3040180



Plug, Connection method: Spring-cage connection, Number of positions: 9, Cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, Width: 46.8 mm, Height: 39 mm, Color: gray

Plug - SPB 2,5/10 - 3040193



Plug, Connection method: Spring-cage connection, Number of positions: 10, Cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, Width: 52 mm, Height: 39 mm, Color: gray

Plug - SPB 2,5/11 - 3040203



Plug, Connection method: Spring-cage connection, Number of positions: 11, Cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, Width: 57.2 mm, Height: 39 mm, Color: gray

Feed-through terminal block - UT 2,5/1P BU - 3045020

Accessories

Plug - SPB 2,5/12 - 3040216



Plug, Connection method: Spring-cage connection, Number of positions: 12, Cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, Width: 62.4 mm, Height: 39 mm, Color: gray

Plug - SPB 2,5/13 - 3040229



Plug, Connection method: Spring-cage connection, Number of positions: 13, Cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, Width: 67.6 mm, Height: 39 mm, Color: gray

Plug - SPB 2,5/14 - 3040232



Plug, Connection method: Spring-cage connection, Number of positions: 14, Cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, Width: 72.8 mm, Height: 39 mm, Color: gray

Plug - SPB 2,5/15 - 3040245



Plug, Connection method: Spring-cage connection, Number of positions: 15, Cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, Width: 78 mm, Height: 39 mm, Color: gray

Plug - SPB 2,5/ 1 BU - 3040724



Plug, Connection method: Spring-cage connection, Number of positions: 1, Cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, Width: 5.2 mm, Height: 39 mm, Color: blue

Feed-through terminal block - UT 2,5/1P BU - 3045020

Accessories

Plug - SPB 2,5/ 1 GNYE - 3040711



Plug, Connection method: Spring-cage connection, Number of positions: 1, Cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, Width: 5.2 mm, Height: 39 mm, Color: green-yellow

Plug - UPBV 2,5/ 1 - 3045145



Plug, Connection method: Screw connection, Number of positions: 1, Cross section: 0.14 mm² - 4 mm², AWG: 26 - 12, Width: 5.2 mm, Height: 47 mm, Color: gray

Plug - UPBV 2,5/ 2 - 3045402



Plug, Connection method: Screw connection, Number of positions: 2, Cross section: 0.14 mm² - 4 mm², AWG: 26 - 12, Width: 10.4 mm, Height: 47 mm, Color: gray

Plug - UPBV 2,5/ 3 - 3045415



Plug, Connection method: Screw connection, Number of positions: 3, Cross section: 0.14 mm² - 4 mm², AWG: 26 - 12, Width: 15.6 mm, Height: 47 mm, Color: gray

Plug - UPBV 2,5/ 4 - 3045428



Plug, Connection method: Screw connection, Number of positions: 4, Cross section: 0.14 mm² - 4 mm², AWG: 26 - 12, Width: 20.8 mm, Height: 47 mm, Color: gray

Feed-through terminal block - UT 2,5/1P BU - 3045020

Accessories

Plug - UPBV 2,5/ 5 - 3045431



Plug, Connection method: Screw connection, Number of positions: 5, Cross section: 0.14 mm² - 4 mm², AWG: 26 - 12, Width: 26 mm, Height: 47 mm, Color: gray

Plug - UPBV 2,5/ 6 - 3045444



Plug, Connection method: Screw connection, Number of positions: 6, Cross section: 0.14 mm² - 4 mm², AWG: 26 - 12, Width: 31.2 mm, Height: 47 mm, Color: gray

Plug - UPBV 2,5/ 7 - 3045457



Plug, Connection method: Screw connection, Number of positions: 7, Cross section: 0.14 mm² - 4 mm², AWG: 26 - 12, Width: 36.4 mm, Height: 47 mm, Color: gray

Plug - UPBV 2,5/ 8 - 3045460



Plug, Connection method: Screw connection, Number of positions: 8, Cross section: 0.14 mm² - 4 mm², AWG: 26 - 12, Width: 41.6 mm, Height: 47 mm, Color: gray

Plug - UPBV 2,5/ 9 - 3045473



Plug, Connection method: Screw connection, Number of positions: 9, Cross section: 0.14 mm² - 4 mm², AWG: 26 - 12, Width: 46.8 mm, Height: 47 mm, Color: gray

Feed-through terminal block - UT 2,5/1P BU - 3045020

Accessories

Plug - UPBV 2,5/10 - 3045499



Plug, Connection method: Screw connection, Number of positions: 10, Cross section: 0.14 mm² - 4 mm², AWG: 26 - 12, Width: 52 mm, Height: 47 mm, Color: gray

Plug - UPBV 2,5/11 - 3045509



Plug, Connection method: Screw connection, Number of positions: 11, Cross section: 0.14 mm² - 4 mm², AWG: 26 - 12, Width: 57.2 mm, Height: 47 mm, Color: gray

Plug - UPBV 2,5/12 - 3045512



Plug, Connection method: Screw connection, Number of positions: 12, Cross section: 0.14 mm² - 4 mm², AWG: 26 - 12, Width: 62.4 mm, Height: 47 mm, Color: gray

Plug - UPBV 2,5/13 - 3045525



Plug, Connection method: Screw connection, Number of positions: 13, Cross section: 0.14 mm² - 4 mm², AWG: 26 - 12, Width: 67.6 mm, Height: 47 mm, Color: gray

Plug - UPBV 2,5/14 - 3045538



Plug, Connection method: Screw connection, Number of positions: 14, Cross section: 0.14 mm² - 4 mm², AWG: 26 - 12, Width: 72.8 mm, Height: 47 mm, Color: gray

Feed-through terminal block - UT 2,5/1P BU - 3045020

Accessories

Plug - UPBV 2,5/15 - 3045541



Plug, Connection method: Screw connection, Number of positions: 15, Cross section: 0.14 mm² - 4 mm², AWG: 26 - 12, Width: 78 mm, Height: 47 mm, Color: gray

Plug - UPBV 2,5/ 1 BU - 3045240



Plug, Connection method: Screw connection, Number of positions: 1, Cross section: 0.14 mm² - 4 mm², AWG: 26 - 12, Width: 5.2 mm, Height: 47 mm, Color: blue

Plug - UPBV 2,5/ 1 GNYE - 3045253



Plug, Connection method: Screw connection, Number of positions: 1, Cross section: 0.14 mm² - 4 mm², AWG: 26 - 12, Width: 5.2 mm, Height: 47 mm, Color: green-yellow

Plug - UPBV 2,5/ 1-L - 3045318



Plug, Connection method: Screw connection, Number of positions: 1, Cross section: 0.14 mm² - 4 mm², AWG: 26 - 12, Width: 5.2 mm, Height: 47 mm, Color: gray

Plug - UPBV 2,5/ 1-L BU - 3045321



Plug, Connection method: Screw connection, Number of positions: 1, Cross section: 0.14 mm² - 4 mm², AWG: 26 - 12, Width: 5.2 mm, Height: 47 mm, Color: blue

Feed-through terminal block - UT 2,5/1P BU - 3045020

Accessories

Plug - UPBV 2,5/ 1-L GNYE - 3045334



Plug, Connection method: Screw connection, Number of positions: 1, Cross section: 0.14 mm² - 4 mm², AWG: 26 - 12, Width: 5.2 mm, Height: 47 mm, Color: green-yellow

Plug - UPBV 2,5/ 1-M - 3045347



Plug, Connection method: Screw connection, Number of positions: 1, Cross section: 0.14 mm² - 4 mm², AWG: 26 - 12, Width: 5.2 mm, Height: 47 mm, Color: gray

Plug - UPBV 2,5/ 1-M BU - 3045350



Plug, Connection method: Screw connection, Number of positions: 1, Cross section: 0.14 mm² - 4 mm², AWG: 26 - 12, Width: 5.2 mm, Height: 47 mm, Color: blue

Plug - UPBV 2,5/ 1-M GNYE - 3045363



Plug, Connection method: Screw connection, Number of positions: 1, Cross section: 0.14 mm² - 4 mm², AWG: 26 - 12, Width: 5.2 mm, Height: 47 mm, Color: green-yellow

Plug - UPBV 2,5/ 1-R - 3045376



Plug, Connection method: Screw connection, Number of positions: 1, Cross section: 0.14 mm² - 4 mm², AWG: 26 - 12, Width: 5.2 mm, Height: 47 mm, Color: gray

Feed-through terminal block - UT 2,5/1P BU - 3045020

Accessories

Plug - UPBV 2,5/ 1-R BU - 3045389



Plug, Connection method: Screw connection, Number of positions: 1, Cross section: 0.14 mm² - 4 mm², AWG: 26 - 12, Width: 5.2 mm, Height: 47 mm, Color: blue

Plug - UPBV 2,5/ 1-R GNYE - 3045392



Plug, Connection method: Screw connection, Number of positions: 1, Cross section: 0.14 mm² - 4 mm², AWG: 26 - 12, Width: 5.2 mm, Height: 47 mm, Color: green-yellow
