

ET 200 RSM Maintenance switch module Up to 25 A Up to 25 A  
 Disconnecter function for Main circuit Han Q4/2



Product brand name	SIMATIC
Product designation	Motor starters
Design of the product	maintenance switch
Product type designation	ET 200pro

General technical data	
<b>Product function</b>	
• on-site operation	Yes
<b>Insulation voltage</b>	
• rated value	400 V
<b>Degree of pollution</b>	3
<b>Surge voltage resistance rated value</b>	6 kV
<b>maximum permissible voltage for safe isolation</b>	
• between main and auxiliary circuit	400 V
<b>Protection class IP</b>	IP65
<b>Shock resistance</b>	15g / 11 ms
<b>Vibration resistance</b>	2g
<b>Type of assignment</b>	1
<b>Reference code acc. to DIN 40719 extended according to IEC 204-2 acc. to IEC 750</b>	A

Reference code acc. to DIN EN 81346-2	Q
Reference code acc. to DIN EN 61346-2	Q
Product component Motor brake output	No
<b>Product feature</b>	
• brake control with 230 V AC	No
• brake control with 400 V AC	No
• brake control with 24 V DC	No
• brake control with 180 V DC	No
• brake control with 500 V DC	No
<b>Product function Short circuit protection</b>	Yes
<b>Design of short-circuit protection</b>	circuit-breakers
<b>Maximum short-circuit current breaking capacity (Icu)</b>	
• at 400 V rated value	50 000 A

Safety related data	
Safety Integrity Level (SIL) acc. to IEC 61508	3
Performance level (PL) acc. to EN ISO 13849-1	e
Category acc. to EN ISO 13849-1	4
PFHD with high demand rate acc. to EN 62061	0.000000000054 1/h
T1 value for proof test interval or service life acc. to IEC 61508	10 y
Protection against electrical shock	finger-safe

Main circuit	
Number of poles for main current circuit	3
Adjustable pick-up value current of the current-dependent overload release	25 ... 25 A
Type of voltage	AC
<b>Operating voltage</b>	
• rated value	200 ... 400 V
<b>Operating range relative to the operating voltage at AC</b>	
• at 50 Hz	200 ... 440 V
<b>Operating current</b>	
• at AC at 400 V rated value	25 A
• at AC-3	
— at 400 V rated value	25 A

Inputs/ Outputs	
<b>Product function</b>	
• digital inputs parameterizable	No
• digital outputs parameterizable	No
<b>Number of digital inputs</b>	0
<b>Number of sockets</b>	
• for digital output signals	0

- for digital input signals

0

### Supply voltage

Type of voltage of the supply voltage	DC
Supply voltage 1 at DC	24 ... 24 V
Supply voltage 1 at DC rated value	
<ul style="list-style-type: none"> <li>• minimum permissible</li> </ul>	20.4 V
<ul style="list-style-type: none"> <li>• maximum permissible</li> </ul>	28.8 V

### Control circuit/ Control

Type of voltage of the control supply voltage	DC
Control supply voltage at DC	
<ul style="list-style-type: none"> <li>• rated value</li> </ul>	20.4 ... 28.8 V
Control supply voltage 1	
<ul style="list-style-type: none"> <li>• at DC rated value</li> </ul>	20.4 ... 28.8 V
<ul style="list-style-type: none"> <li>• at DC</li> </ul>	24 ... 24 V

### Installation/ mounting/ dimensions

Mounting position	any
Mounting type	screw fixing
Height	230 mm
Width	110 mm
Depth	170 mm

### Ambient conditions

Installation altitude at height above sea level	
<ul style="list-style-type: none"> <li>• maximum</li> </ul>	3 500 m
Ambient temperature	
<ul style="list-style-type: none"> <li>• during operation</li> </ul>	-25 ... +55 °C
<ul style="list-style-type: none"> <li>• during storage</li> </ul>	-40 ... +70 °C
<ul style="list-style-type: none"> <li>• during transport</li> </ul>	-40 ... +70 °C
Relative humidity during operation	5 ... 95 %

### Communication/ Protocol

Protocol is supported	
<ul style="list-style-type: none"> <li>• PROFIBUS DP protocol</li> </ul>	Yes
<ul style="list-style-type: none"> <li>• PROFINET protocol</li> </ul>	Yes
Design of the interface	
<ul style="list-style-type: none"> <li>• PROFINET protocol</li> </ul>	Yes
Product function Bus communication	Yes
Protocol is supported	
<ul style="list-style-type: none"> <li>• AS-Interface protocol</li> </ul>	No
Product function	
<ul style="list-style-type: none"> <li>• supports PROFinergy measured values</li> </ul>	No
<ul style="list-style-type: none"> <li>• supports PROFinergy shutdown</li> </ul>	No

<b>address range memory of address range</b>	
<ul style="list-style-type: none"> <li>• of the inputs</li> <li>• of the outputs</li> </ul>	<p>1 byte</p> <p>0 byte</p>
<b>Type of electrical connection</b>	
<ul style="list-style-type: none"> <li>• of the communication interface</li> </ul>	via backplane bus

### Connections/ Terminals

<b>Type of electrical connection</b>	
<ul style="list-style-type: none"> <li>• for main current circuit</li> </ul>	tab terminals
<b>Type of electrical connection</b>	
<ul style="list-style-type: none"> <li>• 1 for digital input signals</li> <li>• 2 for digital input signals</li> <li>• 3 for digital input signals</li> <li>• 4 for digital input signals</li> </ul>	<p>M12 socket</p> <p>M12 socket</p> <p>M12 socket</p> <p>M12 socket</p>
<b>Type of electrical connection</b>	
<ul style="list-style-type: none"> <li>• at the manufacturer-specific device interface</li> <li>• for main energy infeed</li> <li>• for load-side outgoing feeder</li> <li>• for main energy transmission</li> <li>• for supply voltage line-side</li> <li>• for supply voltage transmission</li> </ul>	<p>optical interface</p> <p>socket according to ISO23570</p> <p>socket according to ISO23570</p> <p>socket according to ISO23570</p> <p>via backplane bus</p> <p>via backplane bus</p>

### UL/CSA ratings

<b>Operating voltage</b>	
<ul style="list-style-type: none"> <li>• at AC at 60 Hz acc. to CSA and UL rated value</li> </ul>	600 V

### Certificates/ approvals

<b>General Product Approval</b>	<b>EMC</b>	<b>Declaration of Conformity</b>
---------------------------------	------------	----------------------------------



<b>Declaration of Conformity</b>	<b>Test Certificates</b>	<b>other</b>
----------------------------------	--------------------------	--------------

[Miscellaneous](#)

[Type Test Certificates/Test Report](#)

[Confirmation](#)

### Further information

Information- and Downloadcenter (Catalogs, Brochures,...)  
[www.siemens.com/ic10](http://www.siemens.com/ic10)

**Industry Mall (Online ordering system)**

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RK1304-0HS00-6AA0>

**Cax online generator**


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RK1304-0HS00-6AA0>

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**

<https://support.industry.siemens.com/cs/ww/en/ps/3RK1304-0HS00-6AA0>

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)**

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RK1304-0HS00-6AA0&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RK1304-0HS00-6AA0&lang=en)

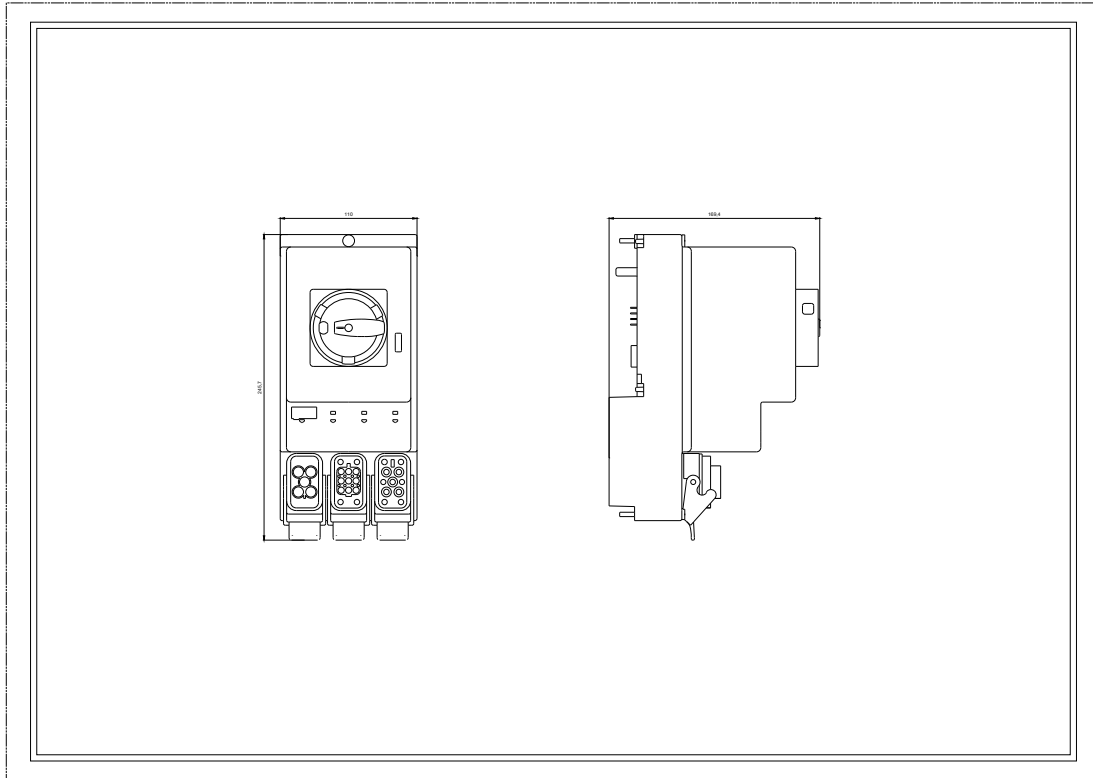

last modified:

12/16/2019