

Fail-safe direct starter, 3RM1, 500 V, 0.09 - 0.75 kW, 0.4 - 2 A, 24 V DC, spring-type terminals



Product brand name	SIRIUS
Product category	Motor starter
Product designation	Fail-safe direct starter
Design of the product	With electronic overload protection and safety-related disconnection
Product type designation	3RM1

General technical data	
Trip class	CLASS 10A
Product function	
• Intrinsic device protection	Yes
Suitability for operation Device connector 3ZY12	Yes
Power loss [W] for rated value of the current at AC in hot operating state per pole	0.1 W
Insulation voltage	
• rated value	500 V
Surge voltage resistance rated value	6 kV
maximum permissible voltage for safe isolation	
• between main and auxiliary circuit	500 V
• between control and auxiliary circuit	250 V

Protection class IP	IP20
Shock resistance	6g / 11 ms
Vibration resistance	1 ... 6 Hz, 15 mm; 20 m/s ² , 500 Hz
Operating frequency maximum	1 1/s
Mechanical service life (switching cycles) <ul style="list-style-type: none"> • typical 	30 000 000
Reference code acc. to DIN 40719 extended according to IEC 204-2 acc. to IEC 750	Q
Reference code acc. to DIN EN 81346-2	Q
Reference code acc. to DIN EN 61346-2	Q
Product function <ul style="list-style-type: none"> • direct start • reverse starting 	Yes No
Product function Short circuit protection	No

Electromagnetic compatibility

Conducted interference <ul style="list-style-type: none"> • due to burst acc. to IEC 61000-4-4 • due to conductor-earth surge acc. to IEC 61000-4-5 • due to conductor-conductor surge acc. to IEC 61000-4-5 • due to high-frequency radiation acc. to IEC 61000-4-6 	3 kV / 5 kHz 4 kV signal lines 2 kV 2 kV 10 V
Electrostatic discharge acc. to IEC 61000-4-2	6 kV contact discharge / 8 kV air discharge
Conducted HF-interference emissions acc. to CISPR11	Class B for the domestic, business and commercial environments
Field-bound HF-interference emission acc. to CISPR11	Class B for the domestic, business and commercial environments

Safety related data

Safety device type acc. to IEC 61508-2	Type B
Safety Integrity Level (SIL) acc. to IEC 61508	3
Performance level (PL) acc. to EN ISO 13849-1	e
Category acc. to EN ISO 13849-1	4
Stop category acc. to DIN EN 60204-1	0
Safe failure fraction (SFF)	99.4 %
Average diagnostic coverage level (DCavg)	99 %
Diagnostics test interval by internal test function maximum	600 s
Function test interval maximum	1 y
Failure rate [FIT] <ul style="list-style-type: none"> • at rate of recognizable hazardous failures (λ_{dd}) • at rate of non-recognizable hazardous failures (λ_{du}) 	1 400 FIT 16 FIT

PFHD with high demand rate acc. to EN 62061	0.00000002 1/h
PFDavg with low demand rate acc. to IEC 61508	0.000018
MTTFd	75 y
Hardware fault tolerance acc. to IEC 61508	1
T1 value for proof test interval or service life acc. to IEC 61508	20 y
Safe state	Load circuit open
Protection against electrical shock	finger-safe
Off-delay time with safety-related request	
• when switched off via control inputs maximum	43 ms
• when switched off via supply voltage maximum	120 ms
Hardware fault tolerance acc. to IEC 61508 relating to ATEX	0
PFDavg with low demand rate acc. to IEC 61508 relating to ATEX	0.0005
PFHD with high demand rate acc. to EN 62061 relating to ATEX	0.00000005 1/h
Safety Integrity Level (SIL) acc. to IEC 61508 relating to ATEX	SIL2
T1 value for proof test interval or service life acc. to IEC 61508 relating to ATEX	3 y

Main circuit

Number of poles for main current circuit	3
Adjustable pick-up value current of the current-dependent overload release	0.4 ... 2 A
Minimum load [%]	20 %
Type of the motor protection	solid-state
Operating voltage	
• rated value	48 ... 500 V
Relative symmetrical tolerance of the operating voltage	10 %
Operating frequency 1 rated value	50 Hz
Operating frequency 2 rated value	60 Hz
Relative symmetrical tolerance of the operating frequency	10 %
Operating current	
• at AC at 400 V rated value	2 A
• at AC-53a at 400 V at ambient temperature 40 °C rated value	2 A
Ampacity when starting maximum	16 A
Operating power for three-phase motors at 400 V at 50 Hz	0.09 ... 0.75 kW

Inputs/ Outputs

Input voltage at digital input	
--------------------------------	--

<ul style="list-style-type: none"> • at DC rated value 	24 V
<ul style="list-style-type: none"> • with signal <0> at DC 	0 ... 5 V
<ul style="list-style-type: none"> • for signal <1> at DC 	15 ... 30
Input current at digital input	
<ul style="list-style-type: none"> • with signal <0> typical 	0.001 A
<ul style="list-style-type: none"> • for signal <1> typical 	0.008 A
Input current at digital input	
<ul style="list-style-type: none"> • for signal <1> at DC 	8 mA
<ul style="list-style-type: none"> • with signal <0> at DC 	1 mA
Number of CO contacts for auxiliary contacts	1
Operating current of auxiliary contacts at AC-15 at 230 V maximum	3 A
Operating current of auxiliary contacts at DC-13 at 24 V maximum	1 A

Control circuit/ Control

Type of voltage of the control supply voltage	DC
Control supply voltage 1	
<ul style="list-style-type: none"> • at DC rated value 	24 V
Operating range factor control supply voltage rated value at DC	
<ul style="list-style-type: none"> • initial value 	0.8
<ul style="list-style-type: none"> • Full-scale value 	1.25
Control current at DC	
<ul style="list-style-type: none"> • in standby mode 	13 mA
<ul style="list-style-type: none"> • when switching on 	150 mA
<ul style="list-style-type: none"> • during operation 	57 mA

Response times

Switch-on delay time	65 ... 76 ms
Off-delay time	30 ... 43 ms

Installation/ mounting/ dimensions

Mounting position	vertical, horizontal, standing (observe derating)
Mounting type	screw and snap-on mounting onto 35 mm standard mounting rail
Height	100 mm
Width	22.5 mm
Depth	141.6 mm
Required spacing	
<ul style="list-style-type: none"> • with side-by-side mounting 	
<ul style="list-style-type: none"> — forwards 	0 mm
<ul style="list-style-type: none"> — Backwards 	0 mm
<ul style="list-style-type: none"> — upwards 	50 mm
<ul style="list-style-type: none"> — downwards 	50 mm

— at the side	0 mm
• for grounded parts	
— forwards	0 mm
— Backwards	0 mm
— upwards	50 mm
— at the side	3.5 mm
— downwards	50 mm

Ambient conditions

Installation altitude at height above sea level	
• maximum	2 000 m
Ambient temperature	
• during operation	-25 ... +60 °C
• during storage	-40 ... +70 °C
• during transport	-40 ... +70 °C
Relative humidity during operation	10 ... 95 %
Air pressure	
• acc. to SN 31205	900 ... 1 060 hPa

Communication/ Protocol

Product function Bus communication	No
---	----

Connections/ Terminals








Type of electrical connection	PUSH-IN connection (spring-loaded connection) for main circuit, spring-loaded terminals (push-in) for control circuit
• for main current circuit	PUSH-IN connection (spring-loaded connection)
• for auxiliary and control current circuit	spring-loaded terminals (push-in)
Type of connectable conductor cross-sections	
• for main contacts	
— solid	1x (0.5 ... 4 mm ²)
— finely stranded with core end processing	1x (0.5 ... 2.5 mm ²)
— finely stranded without core end processing	1x (0.5 ... 4 mm ²)
• at AWG conductors for main contacts	1x (20 ... 12)
Connectable conductor cross-section for main contacts	
• single or multi-stranded	0.5 ... 4 mm ²
• finely stranded with core end processing	0.5 ... 2.5 mm ²
• finely stranded without core end processing	0.5 ... 4 mm ²
Connectable conductor cross-section for auxiliary contacts	
• single or multi-stranded	0.5 ... 1.5 mm ²
• finely stranded with core end processing	0.5 ... 1 mm ²
• finely stranded without core end processing	0.5 ... 1.5 mm ²

Type of connectable conductor cross-sections	
<ul style="list-style-type: none"> • for auxiliary contacts <ul style="list-style-type: none"> — solid — finely stranded with core end processing — finely stranded without core end processing • at AWG conductors for auxiliary contacts 	<p>1x (0.5 ... 1.5 mm²), 2x (0.5 ... 1.5 mm²)</p> <p>1x (0,5 ... 1,0 mm²), 2x (0,5 ... 1,0 mm²)</p> <p>1x (0.5 ... 1.5 mm²), 2x (0.5 ... 1.5 mm²)</p> <p>1x (20 ... 16), 2x (20 ... 16)</p>
AWG number as coded connectable conductor cross section	
<ul style="list-style-type: none"> • for main contacts • for auxiliary contacts 	<p>20 ... 12</p> <p>20 ... 16</p>

UL/CSA ratings

Yielded mechanical performance [hp]	
<ul style="list-style-type: none"> • for single-phase AC motor <ul style="list-style-type: none"> — at 230 V rated value • for three-phase AC motor <ul style="list-style-type: none"> — at 200/208 V rated value — at 220/230 V rated value — at 460/480 V rated value 	<p>0.125 hp</p> <p>0.333 hp</p> <p>0.333 hp</p> <p>0.75 hp</p>

Certificates/ approvals

General Product Approval	EMC	For use in hazardous locations		
 CCC	 CSA	 UL		
  				
Functional Safety/Safety of Machinery	Declaration of Conformity	Test Certificates	other	Railway
Type Examination Certificate	 EG-Konf.	Miscellaneous	Type Test Certificates/Test Report	Confirmation
				Special Test Certificate

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)


www.siemens.com/ic10


Industry Mall (Online ordering system)



<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RM1102-2AA04>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RM1102-2AA04>

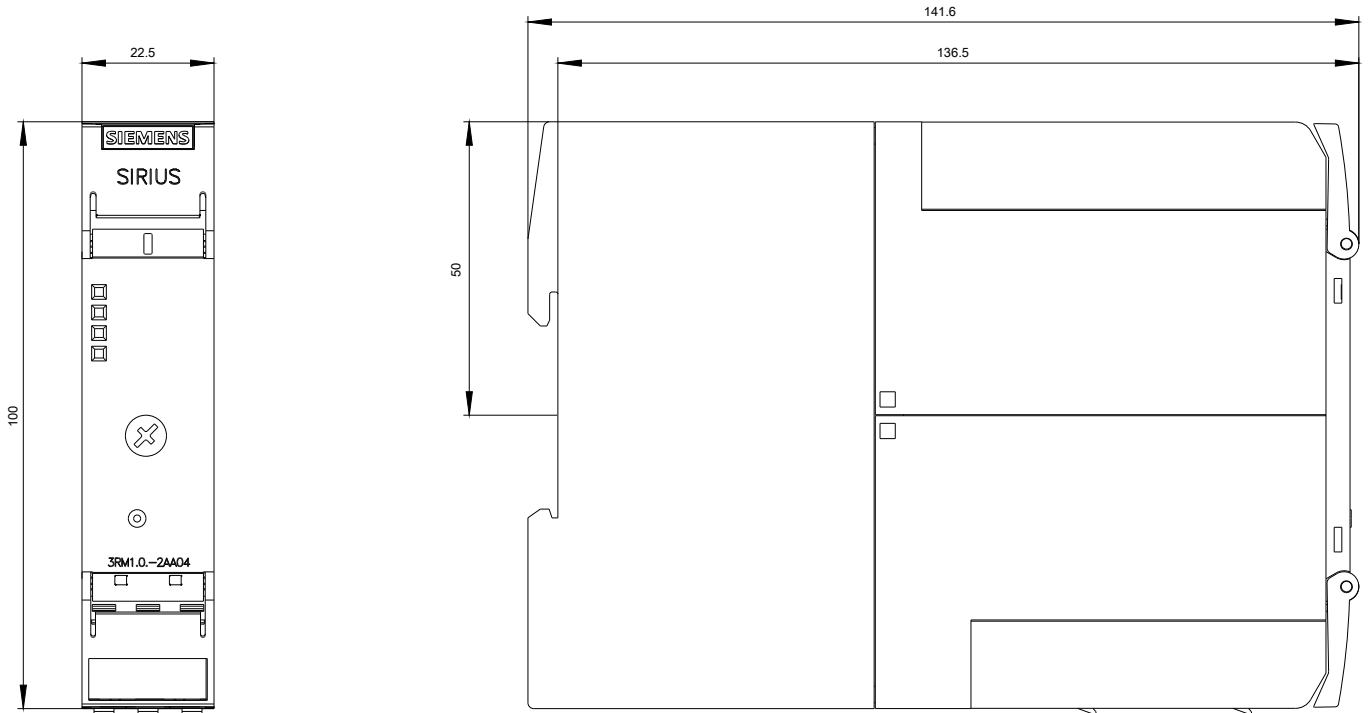

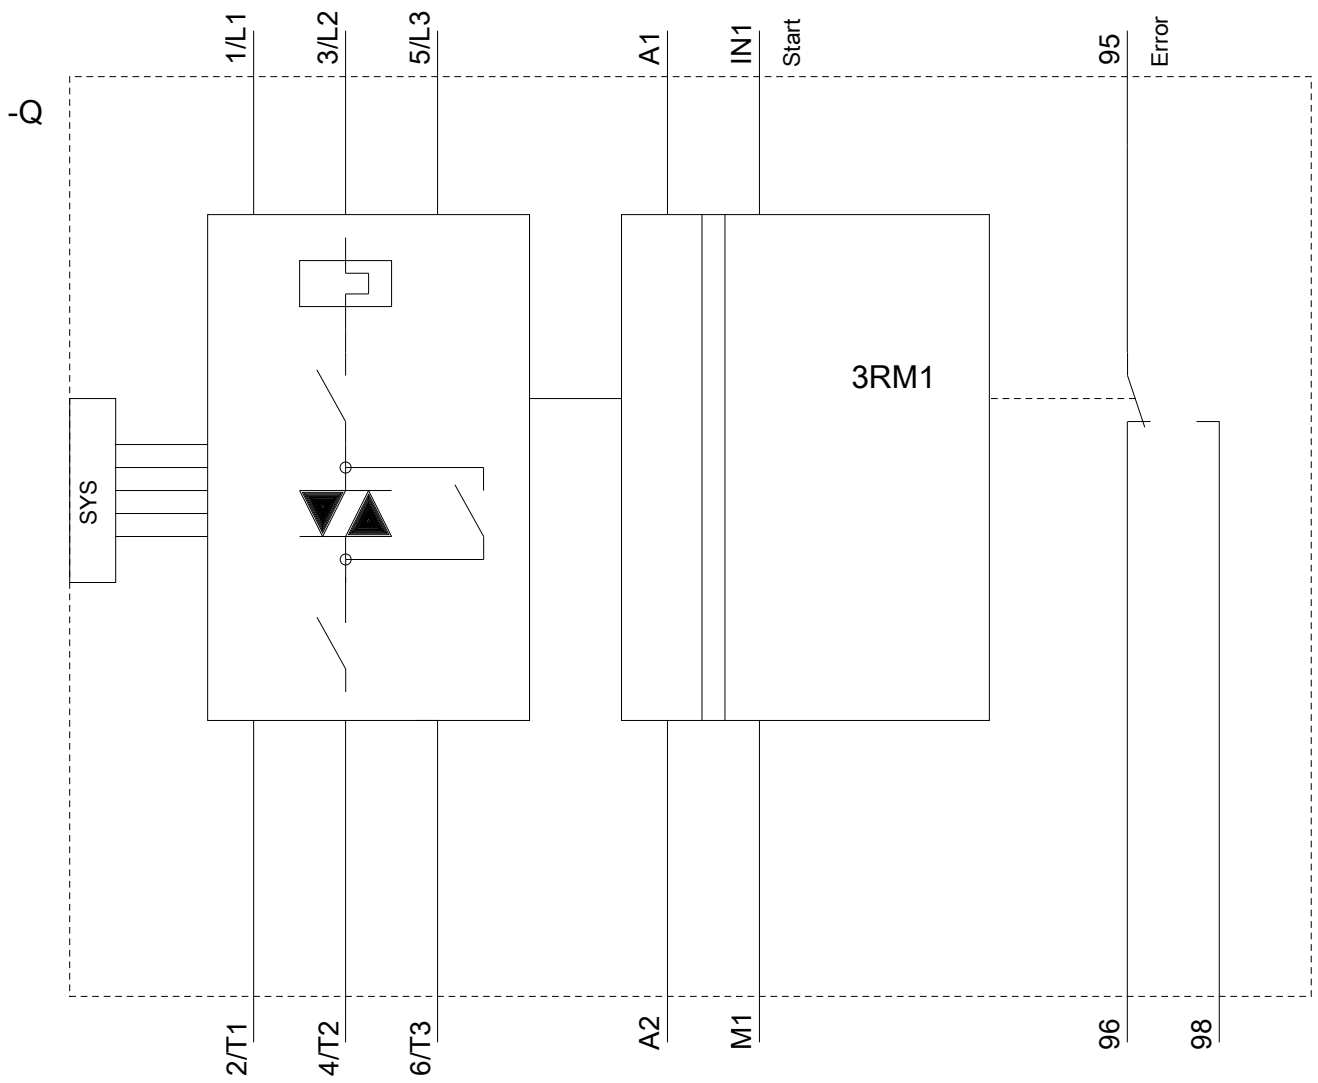

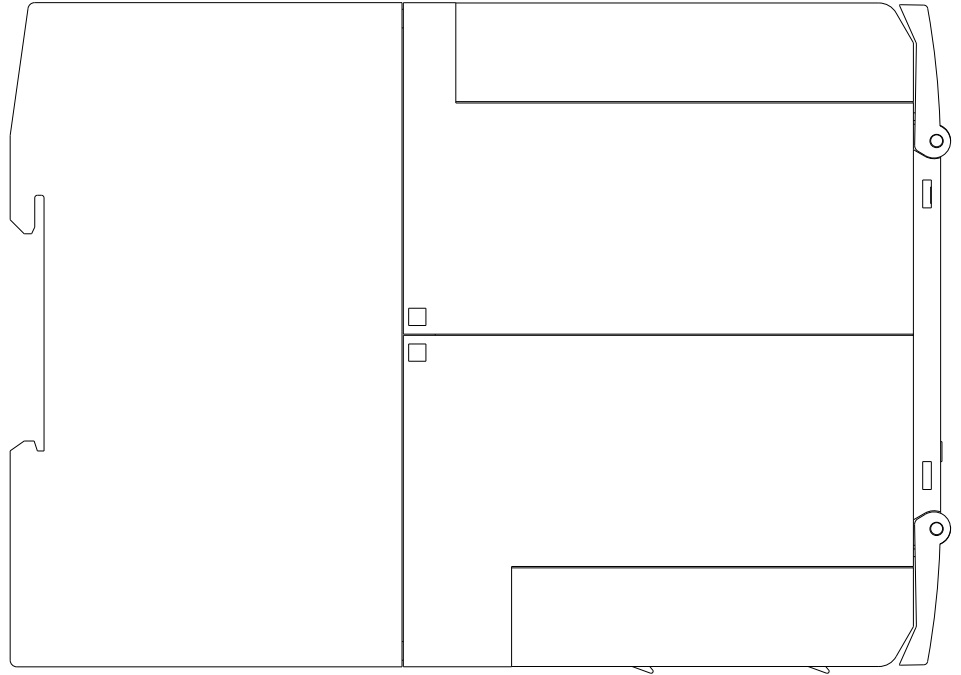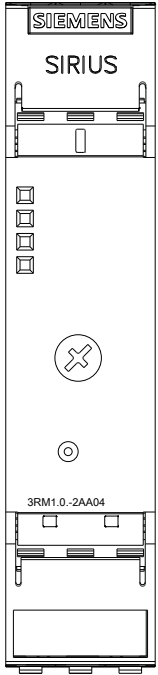

last modified:

12/16/2019