

Surge suppressor, diode combination, 24 V DC, for motor contactors Size S0,



General technical data		
Product brand name		SIRIUS
Product designation		surge suppressor
Size of contactor		S0
Design of the surge suppressor		with diode assemblies
Ambient temperature		
<ul style="list-style-type: none"> during storage 	°C	-40 ... +80
<ul style="list-style-type: none"> during operation 	°C	-25 ... +60
Control circuit/ Control		
Type of voltage of the control supply voltage		DC
Control supply voltage 1		
<ul style="list-style-type: none"> at DC rated value 	V	24
Installation/ mounting/ dimensions		
Mounting position		any
Mounting type		clip-on
Width	mm	30
Height	mm	19
Depth	mm	12

Certificates/ approvals

Certificate of suitability

CE / UL / CSA / CCC

General Product Approval

EMC

Declaration of Conformity



CSA



UR



RCM



EG-Konf.

[Miscellaneous](#)

Test Certificates

Shipping Approval

[Special Test Certificate](#)

[Type Test Certificates/Test Report](#)



other

Railway

[Confirmation](#)



VDE

[Vibration and Shock](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT2926-1ER00>

Cax online generator



<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT2926-1ER00>


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RT2926-1ER00>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RT2926-1ER00&lang=en

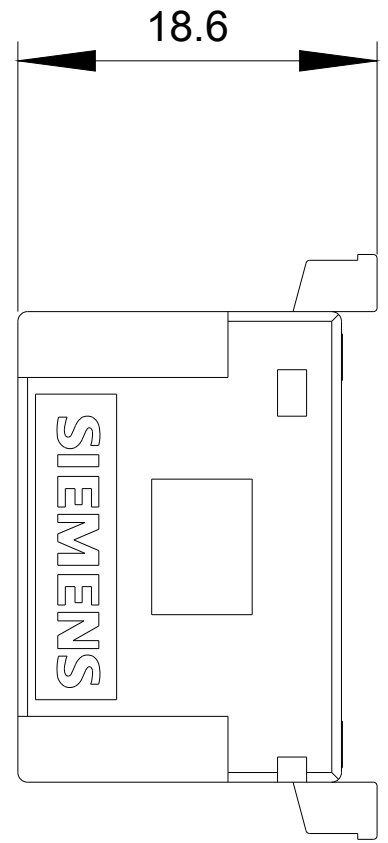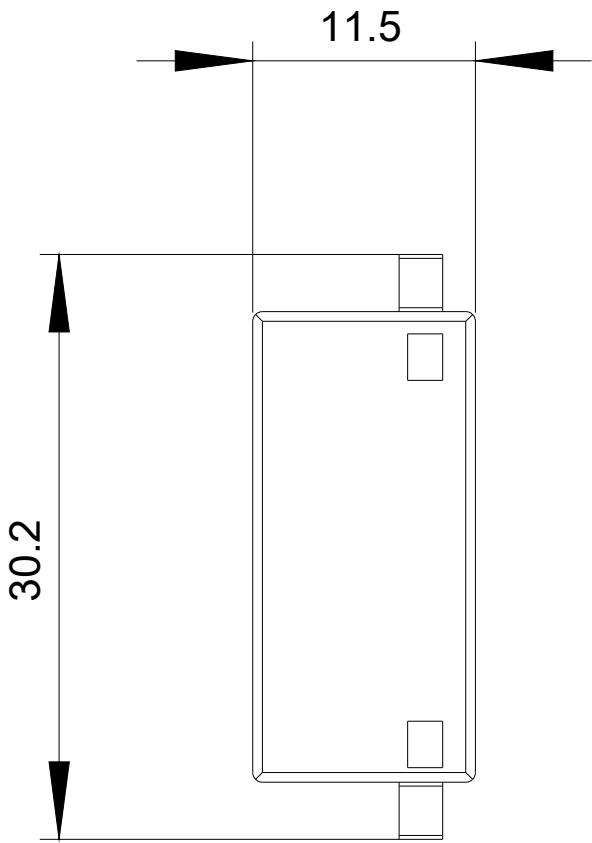

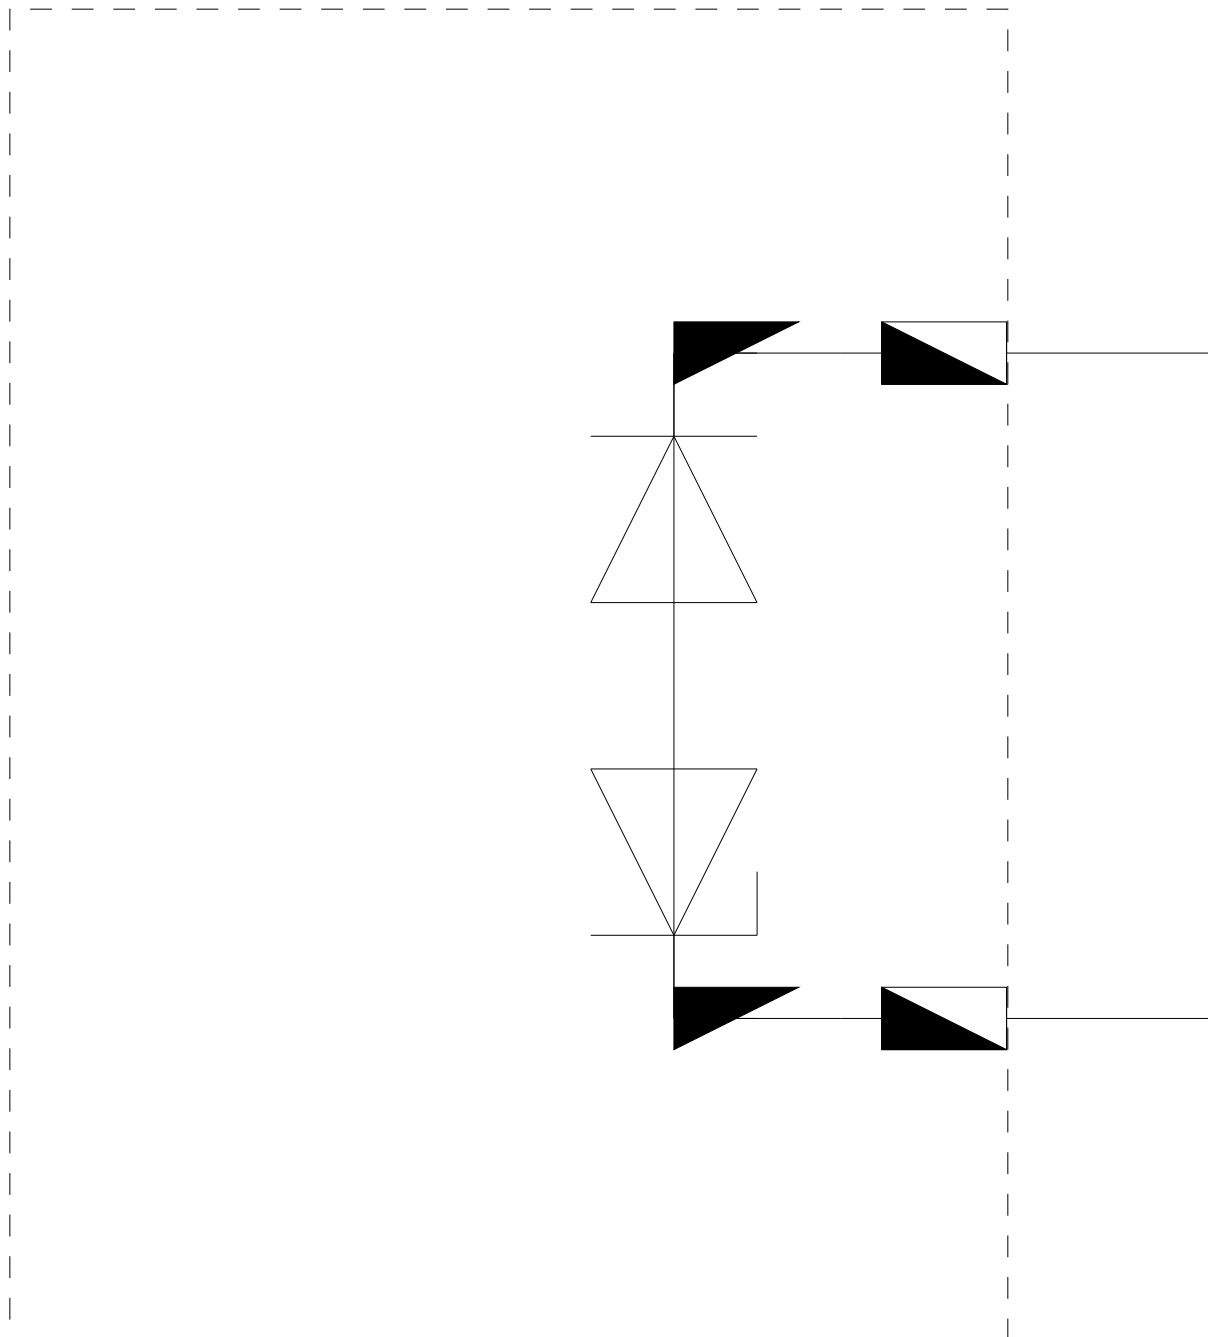

last modified:

02/05/2020