

Illuminated pushbutton, 22 mm, round, metal, shiny, white, pushbutton, flat, momentary contact type, with holder, 1 NO+1 NC, LED module with integrated LED 24 V AC/DC, screw terminal



|                                      |  |
|--------------------------------------|--|
| <b>Product brand name</b>            | SIRIUS ACT   |
| <b>Product designation</b>           | Illuminated pushbuttons  |
| <b>Design of the product</b>         | Complete unit  |
| <b>Product type designation</b>      | 3SU1   |
| <b>Product line</b>                  | Metal, shiny, 22 mm  |
| <b>Manufacturer's article number</b> | <ul style="list-style-type: none"> <li>• 1 of supplied contact module <a href="#">3SU1400-1AA10-1FA0</a></li> <li>• of supplied LED module <a href="#">3SU1401-1BB60-1AA0</a></li> <li>• of the supplied holder <a href="#">3SU1550-0AA10-0AA0</a></li> <li>• of the supplied actuator <a href="#">3SU1051-0AB60-0AA0</a></li> </ul> |
| <b>Number of command points</b>      | 1  |

| Actuator   |                        |
|--|------------------------|
| <b>Design of the operating mechanism</b>           | Button, flat           |
| <b>Manner of function of the actuating element</b> | momentary contact type |
| <b>Product extension optional Light source</b>     | Yes                    |
| <b>Color</b>                                       |                        |
| • of the actuating element                         | white                  |
| <b>Material of the actuating element</b>           | plastic                |
| <b>Shape of the actuating element</b>              | round                  |

|   |  |
|---|--|
| Outer diameter of the actuating element                 | 29.45 mm   |
| Number of contact modules                               | 1  |
| <b>Front ring</b>                                       |  |
| Product component front ring                            | Yes  |
| Design of the front ring                                | Standard   |
| Material of the front ring                              | Metal, high gloss                                    |
| Color of the front ring                                 | silver   |
| <b>Holder</b>   |  |
| Material of the holder                                  | Metal  |
| <b>Display</b>  |  |
| Number of LED modules                                   | 1  |
| <b>General technical data</b>                           |  |
| <b>Product function</b>                                 |  |
| • positive opening                                      | Yes  |
| <b>Product component</b>                                |  |
| • Light source  | Yes  |
| <b>Insulation voltage</b>                               |  |
| • rated value   | 320 V  |
| <b>Degree of pollution</b>                              | 3  |
| <b>Type of voltage</b>                                  |  |
| • of the operating voltage                              | AC/DC  |
| <b>Surge voltage resistance rated value</b>             | 4 kV   |
| <b>Protection class IP</b>                              | IP66, IP67, IP69(IP69K)                              |
| • of the terminal                                       | IP20   |
| <b>Degree of protection NEMA rating</b>                 | 1, 2, 3, 3R, 4, 4X, 12, 13                           |
| <b>Shock resistance</b>                                 |  |
| • acc. to IEC 60068-2-27                                | Sinusoidal half-wave 50 g / 11 ms                    |
| <b>Vibration resistance</b>                             |  |
| • acc. to IEC 60068-2-6                                 | 10 ... 500 Hz: 5g                                    |
| <b>Operating frequency maximum</b>                      | 3 600 1/h  |
| <b>Mechanical service life (switching cycles)</b>       |  |
| • typical   | 3 000 000  |
| <b>Electrical endurance (switching cycles)</b>          |  |
| • typical   | 10 000 000   |
| <b>Thermal current</b>                                  | 10 A   |
| <b>Reference code acc. to DIN EN 81346-2</b>            | S  |
| <b>Reference code acc. to DIN EN 61346-2</b>            | S  |
| <b>Continuous current of the C characteristic MCB</b>   | 10 A; for a short-circuit current smaller than 400 A |
| <b>Continuous current of the quick DIAZED fuse link</b> | 10 A   |
| <b>Continuous current of the DIAZED fuse link gG</b>    | 10 A   |
| <b>Operating voltage</b>                                |  |

|                        |             |
|------------------------|-------------|
| • at AC                |             |
| — at 50 Hz rated value | 5 ... 500 V |
| — at 60 Hz rated value | 5 ... 500 V |
| • at DC                |             |
| — rated value          | 5 ... 500 V |

## Power Electronics

|                            |  |
|----------------------------|--|
| <b>Contact reliability</b> | One maloperation per 100 million (17 V, 5 mA), one maloperation per 10 million (5 V, 1 mA) |
|----------------------------|--|

## Supply voltage

|   |       |
|---|-------|
| <b>Type of voltage of the supply voltage</b>    |       |
| • of the light source                           | AC/DC |
| <b>Supply voltage of the light source at AC</b> |       |
| • at 50 Hz rated value                          | 24 V  |
| • at 60 Hz rated value                          | 24 V  |
| <b>Supply voltage of the light source at DC</b> |       |
| • rated value                                   | 24 V  |

## Control circuit/ Control

|   |     |
|---|-----|
| <b>Inrush current of LED module maximum</b> | 2 A |
|---|-----|

## Auxiliary circuit

|   |              |
|---|--------------|
| <b>Design of the contact of auxiliary contacts</b>  | Silver alloy |
| <b>Number of NC contacts for auxiliary contacts</b> | 1            |
| <b>Number of NO contacts for auxiliary contacts</b> | 1            |

## Connections/ Terminals

|   |                                    |
|---|------------------------------------|
| <b>Type of electrical connection</b>                  |                                    |
| • of modules and accessories                          | Screw-type terminal                |
| <b>Type of connectable conductor cross-sections</b>   |                                    |
| • solid with core end processing                      | 2x (0.5 ... 0.75 mm <sup>2</sup> ) |
| • solid without core end processing                   | 2x (1.0 ... 1.5 mm <sup>2</sup> )  |
| • finely stranded with core end processing            | 2x (0.5 ... 1.5 mm <sup>2</sup> )  |
| • finely stranded without core end processing         | 2x (1,0 ... 1,5 mm <sup>2</sup> )  |
| • at AWG conductors                                   | 2x (18 ... 14)                     |
| <b>Tightening torque of the screws in the bracket</b> | 1 ... 1.2 N·m                      |
| <b>Tightening torque</b>                              |                                    |
| • with screw-type terminals                           | 0.8 ... 0.9 N·m                    |

## Lamp

|                                  |                   |
|----------------------------------|-------------------|
| <b>Type of light source</b>      | LED               |
| <b>Color of the light source</b> | white             |
| <b>Light intensity</b>           | 900 ... 1 400 mcd |

## Ambient conditions

|                            |  |
|----------------------------|--|
| <b>Ambient temperature</b> |  |
|----------------------------|--|

- during operation
- during storage

-25 ... +70 °C

-40 ... +80 °C

Environmental category during operation acc. to IEC 60721

3M6, 3S2, 3B2, 3K6 (with relative air humidity of 10 ... 95 %, no condensation in operation permitted for all devices behind front panel)

### Installation/ mounting/ dimensions

|  |                      |
|--|----------------------|
| <b>Mounting type</b>                               | front panel mounting |
| • of modules and accessories                       | Front plate mounting |
| <b>Height</b>                                      | 40 mm                |
| <b>Width</b>                                       | 30 mm                |
| <b>Shape of the installation opening</b>           | round                |
| <b>Mounting diameter</b>                           | 22.3 mm              |
| <b>Positive tolerance of installation diameter</b> | 0.4 mm               |
| <b>Mounting height</b>                             | 11 mm                |
| <b>Installation width</b>                          | 29.5 mm              |
| <b>Installation depth</b>                          | 71.7 mm              |

### Certificates/ approvals

#### General Product Approval

#### Declaration of Conformity



[Miscellaneous](#)

#### Test Certificates

#### Marine / Shipping

[Type Test Certificates/Test Report](#)

[Special Test Certificate](#)



#### Marine / Shipping

#### other



[Confirmation](#)

### Further information

**Information- and Downloadcenter (Catalogs, Brochures,...)**


<https://www.siemens.com/ic10>

**Industry Mall (Online ordering system)**


<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3SU1152-0AB60-1FA0>

**Cax online generator**

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3SU1152-0AB60-1FA0>

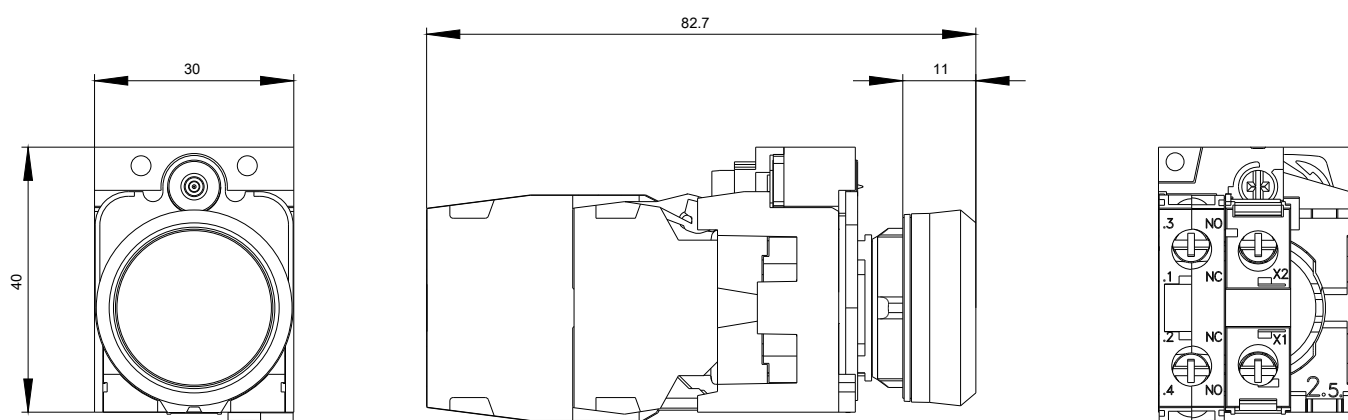

24 V AC/DC  
-P

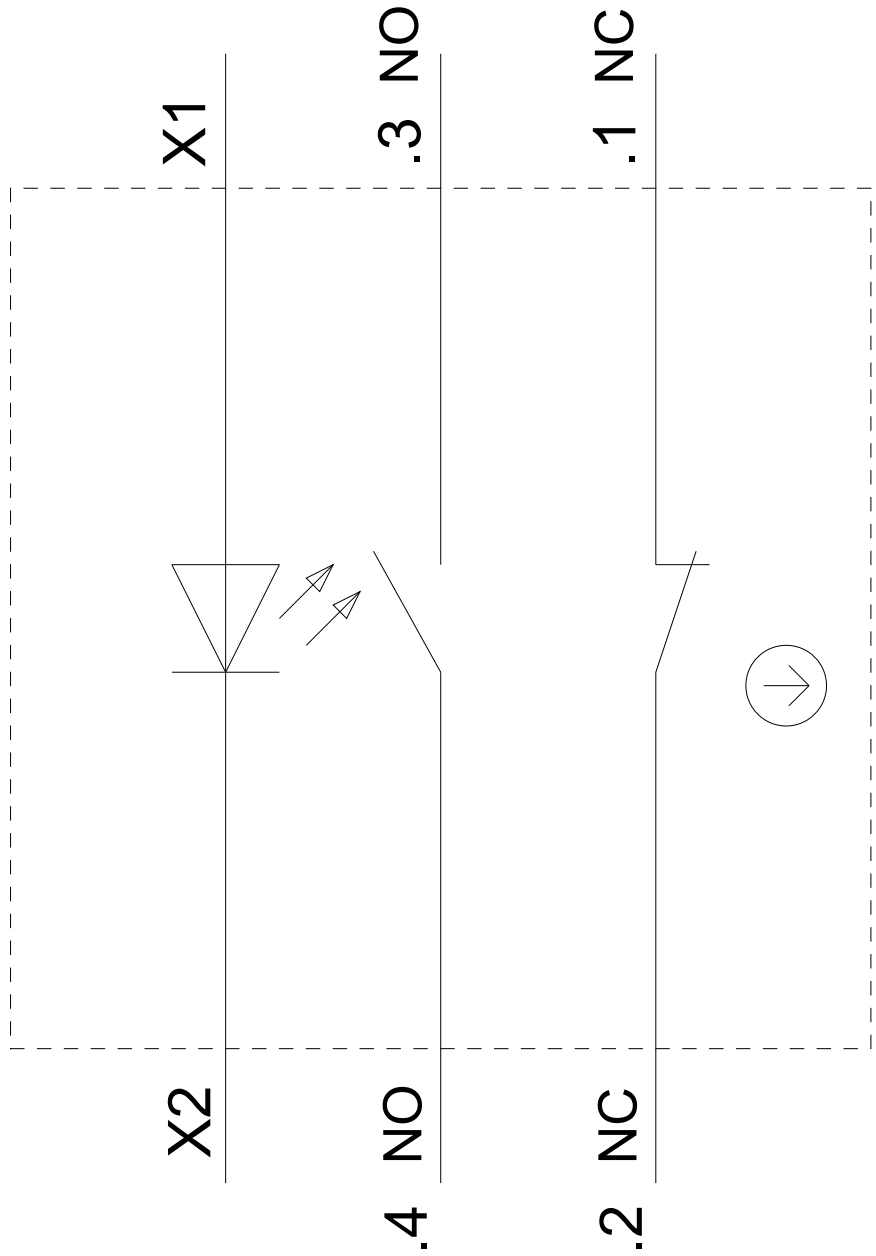

last modified:

03/10/2020