

Power relay, AC-3 8.4 A, 4 kW / 400 V 4 NO, 110 V AC, 45...450 Hz
3 pole, flat connector terminal 6.3 x 0.8mm



Protection class IP	IP00
Reference code acc. to DIN 40719 extended according to IEC 204-2 acc. to IEC 750	K
Reference code acc. to DIN EN 81346-2	K
Reference code acc. to DIN EN 61346-2	K
Number of poles	4
Number of NO contacts for main contacts	3
Number of NC contacts for main contacts	0
Type of voltage	AC
Operating current	
• at AC-1 at 400 V rated value	16 A
• at AC-3 at 400 V rated value	8.4 A
Operating power	
• at AC-3 at 400 V rated value	4 kW
Control supply voltage at AC	
• at 50 Hz rated value	110 ... 110 V
• at 60 Hz rated value	110 ... 110 V
Supply voltage frequency for auxiliary and control current circuit rated value	45 ... 450 Hz
Number of NC contacts for auxiliary contacts	0

Number of NO contacts for auxiliary contacts	1
Number of CO contacts for auxiliary contacts	0
Mounting type	screw and snap-on mounting onto 35 mm standard mounting rail
<ul style="list-style-type: none"> • Side-by-side mounting 	Yes
Height	62 mm
Width	36 mm
Depth	61 mm
Type of electrical connection	
<ul style="list-style-type: none"> • for main current circuit • for auxiliary and control current circuit 	tab terminals tab terminals

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3TG1010-1AG2>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3TG1010-1AG2>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3TG1010-1AG2>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3TG1010-1AG2&lang=en

Characteristic: Tripping characteristics, I²t, Let-through current

<https://support.industry.siemens.com/cs/ww/en/ps/3TG1010-1AG2/char>

Further characteristics (e.g. electrical endurance, switching frequency)

<http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3TG1010-1AG2&objecttype=14&gridview=view1>

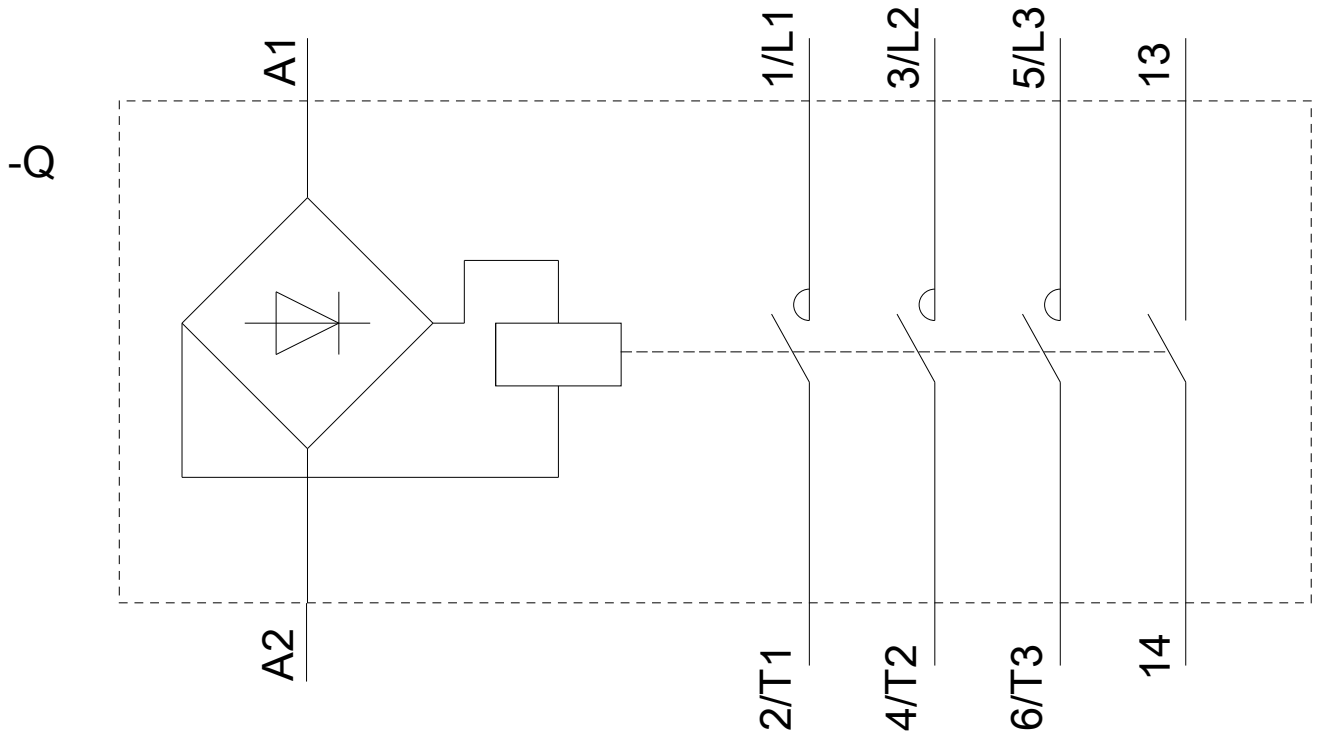

last modified:

04/07/2020