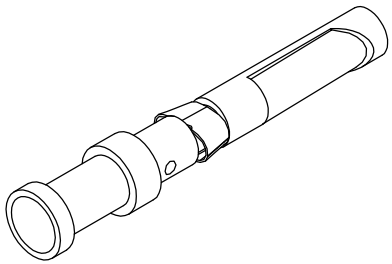

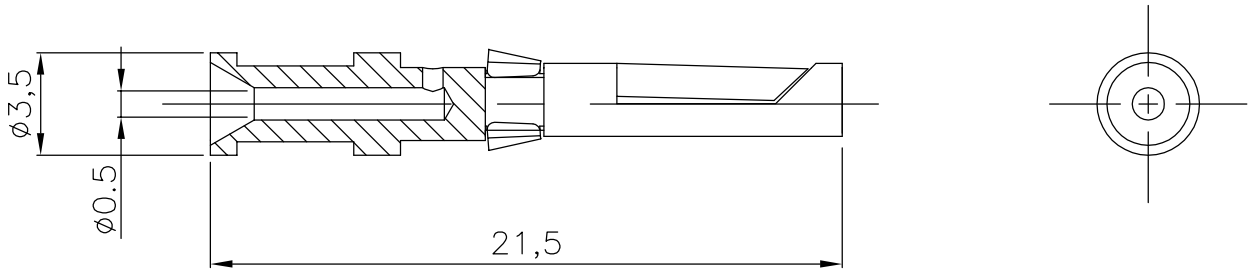

TECHNICAL CHARACTERISTICS CARATTERISTICHE TECNICHE	
Stripping lenght Spellatura filo	8 mm
Rated Current Corrente Nominale	10A
Wire section Sezione filo	0.5 mm²
Material and surface of the contact Materiale e finitura del contatto	Copper Alloy / Gold plated Lega di rame / Dorati
Wire section Calibro filo	20 AWG

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

EC DESCRIPTION
EC NO: |
DRWN: |
CHK'D: |
APPR: |
REV |

QUALITY SYMBOLS
F/A = 0
F/B = 0
F/C = 0
▼ = 0
C = 0
☒ = 0
■ = 0
C = 0

GENERAL TOLERANCES ISO 2768-2/F (UNLESS SPECIFIED)

Dim.	Tol.
0.5÷3	± 0.05
3÷6	± 0.05
6÷30	± 0.1
30÷120	± 0.15
120÷400	± 0.2

ANGULAR DIMENSIONS

<10	± 1°
10÷50	± 0°30'
50÷120	± 0°20'
120÷400	± 0°10'

DIMENSION UNITS: MM	SCALE: 4:1
DRWN BY: ELONGHI	DATE: 10/02/2014
CHK'D BY: MDUGO	DATE: 10/02/2014
APPR BY: MDUGO	DATE: 10/02/2014
DRAWING SIZE: A4	FIRST ANGLE PROJECTION

molex

7100.4202.1
10A CRIMP CONTACT GOLD TURNED FEM

PRODUCT CUSTOMER DRAWING

SERIES	MATERIAL NUMBER	CUSTOMER
93601	0936010042	GENERAL MARKET

DOCUMENT NUMBER	DOC TYPE	DOC PART	SHEET NUMBER
0936010042	PSD	000	1 OF 1