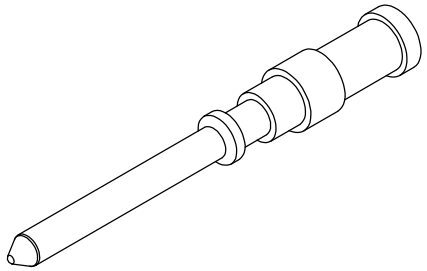

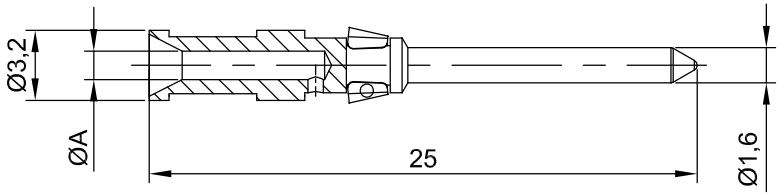

TECHNICAL CHARACTERISTICS CARATTERISTICHE TECNICHE	
Stripping lenght Spellatura filo	8 mm
Ø A Ø A	1.30
Rated Current Corrente Nominale	10A
Wire section Sezione filo	0.75 mm²
Material and surface of the contact Materiale e finitura del contatto	Copper Alloy / Hard gold plated Lega di rame / Dorati
Wire section Calibro filo	18 AVG

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

EC DESCRIPTION

EC NO:
DRWN:
CHK'D:
APPR:

REV

QUALITY SYMBOLS

E = 0
C = 0
B = 0
▼ = 0
C = 0
☒ = 0
■ = 0
C = 0

GENERAL TOLERANCES ISO 2768-2/F (UNLESS SPECIFIED)

Dim.	Tol.
0.5÷3	± 0.05
3÷6	± 0.05
6÷30	± 0.1
30÷120	± 0.15
120÷400	± 0.2

ANGULAR DIMENSIONS

<10	± 1°
10÷50	± 0°30'
50÷120	± 0°20'
120÷400	± 0°10'

DIMENSION UNITS: MM
SCALE: 3:1
DRWN BY: ELONGHI
DATE: 07/02/2014
CHK'D BY: ---
DATE: ---
APPR BY: ---
DATE: ---
DRAWING SIZE: A4
FIRST ANGLE PROJECTION

molex

7100.4213.1
10A turned crimp male contact for inserts and modules

PRODUCT CUSTOMER DRAWING

SERIES	MATERIAL NUMBER	CUSTOMER
09360	0936010055	---

DOCUMENT NUMBER	DOC TYPE	DOC PART	SHEET NUMBER
0936010055	PSD	000	1 OF 1